

1.0MHz, Peak 3A Synchronous Step-Down Converter


FEATURES

- High Efficiency: Up to 95%
- 1.0MHz Constant Frequency Operation
- Peak 3A Output Current with $V_{OUT}=1.2V$
- No Schottky Diode Required
- 2.7V to 5.5V Input Voltage Range
- Output Voltage as Low as 0.6V
- PFM Mode for High Efficiency in Light Load
- 100% Duty Cycle in Dropout Operation
- Low Quiescent Current: 50 μ A
- Short Circuit Protection
- Thermal Fault Protection
- Power Good Output Function (TMI3113 only)
- Inrush Current Limit and Soft Start
- Input overvoltage protection (OVP)
- <1 μ A Shutdown Current
- SOT23-5 package

APPLICATIONS

- Cellular and Smart Phones
- Wireless and DSL Modems
- Portable Instruments
- Digital and Video Cameras
- PC Cards

TYPICAL APPLICATION

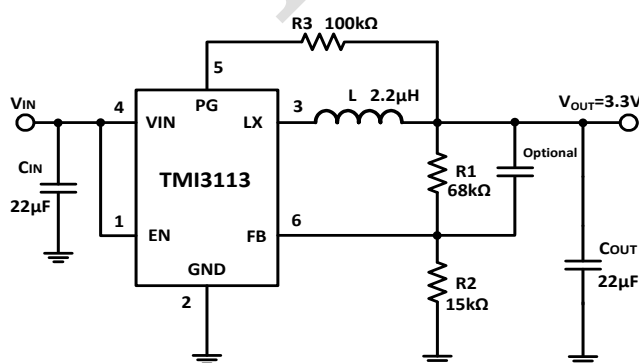


GENERAL DESCRIPTION

The TMI3113 and TMI3113B are 1.0MHz constant frequency, current mode step-down converter. It is ideal for portable equipment requiring high current up to peak 3A from single-cell Lithium-ion batteries. They also can run at 100% duty cycle for low dropout operation, extending battery life in portable systems while light load operation provides very low output ripple for noise sensitive applications. The high switching frequency of TMI3113/TMI3113B could minimize the size of external components while keeping switching losses low. The internal slope compensation setting allows the device to operate with smaller inductor values to optimize size and provide efficient operation. TMI3113 has power good function and it is offered in 6 pin, SOT23-6 package. The TMI3113B is offered in 5-pin, SOT23-5 package with adjustable output voltage without PG pin.

These devices offer two operation modes, PWM control and PFM Mode switching control, which allow a high efficiency over the wider range of the load.

Efficiency


$V_{OUT}=1.2V$, $I_{OUT}=0.01A$ to $3A$, $T_A=25^\circ C$

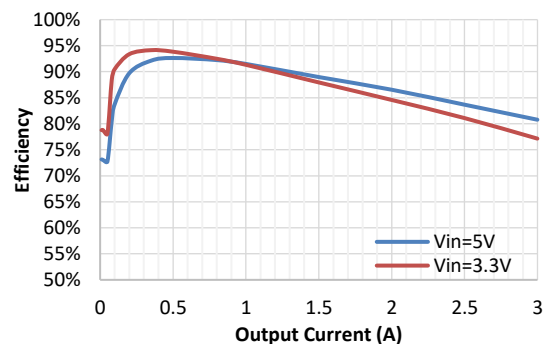

ABSOLUTE MAXIMUM RATINGS (Note 1)

Parameter	Value	Unit
Input Supply Voltage,	-0.3~7	V
LX Voltages	-0.3~7	V
EN, FB, PG Voltage	-0.3~7	V
Junction Temperature <small>(Note2)</small>	160	°C
Power Dissipation	600	mW
Lead Temperature (Soldering,10s)	300	°C

PACKAGE/ORDER INFORMATION

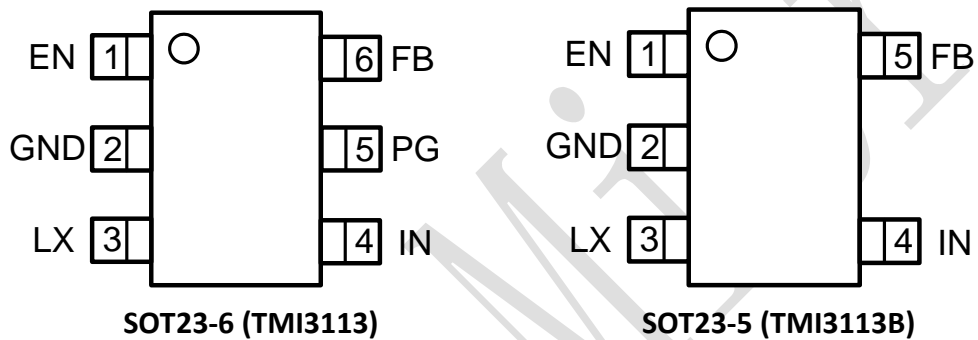

Top Mark: TCBXXX (TCB: Device Code, XXX: Inside Code) For TMI3113

TCCXXX (TCC: Device Code, XXX: Inside Code) For TMI3113B

Part Number	Package	Top mark	Quantity/ Reel
TMI3113	SOT23-6	TCBXXX	3000
TMI3113B	SOT23-5	TCCXXX	3000

TMI3113 and TMI3113B devices are Pb-free and RoHS compliant.

PIN DESCRIPTIONS

Pin		Name	Function
TMI3113	TMI3113B		
1	1	EN	Enable Pin. Drive EN above 1.5V to turn on the part. Drive EN below 0.3V to turn it off. Do not leave EN floating.
2	2	GND	Ground pin.
3	3	LX	Power Switch Output. It is the switch node connection to Inductor. This pin connects to the drains of the internal P-ch and N-ch MOSFET switches.
4	4	VIN	Analog Supply Input Pin.
5	-	PG	Power Good Open Drain Output Pin for TMI3113.
6	5	FB	Output Voltage Feedback Pin. An internal resistive divider divides the output voltage down for comparison to the internal reference voltage.

ESD RATING

Items	Description	Value	Unit
V _{ESD}	Human Body Model for all pins	±2000	V

JEDEC specification JS-001

RECOMMENDED OPERATING CONDITIONS

Items	Description	Min	Max	Unit
Voltage Range	IN	2.7	5.5	V
T _J	Operating Junction Temperature Range	-40	125	°C

ELECTRICAL CHARACTERISTICS (Note 3)

($V_{IN}=V_{EN}=3.6V$, $V_{OUT}=1.8V$, $T_A = 25^{\circ}C$, unless otherwise noted.)

Parameter	Conditions	Min	Typ	Max	Unit
Input Voltage Range		2.7		5.5	V
OVP Threshold	V_{IN} Rising		6.2		V
UVLO Threshold	V_{IN} Rising		2.5		V
UVLO Hysteresis			0.5		V
Quiescent Current	$V_{EN}=2.0V$, $I_{OUT}=0$, $V_{FB}=V_{REF} \times 105\%$		50	85	μA
Shutdown Current	$V_{EN}=0V$		0.1	1.0	μA
Regulated Feedback Voltage V_{FB}	$T_A = 25^{\circ}C$	0.588	0.600	0.612	V
	$T_A = 0^{\circ}C \leq T_A \leq 85^{\circ}C$	0.586	0.600	0.613	V
	$T_A = -40^{\circ}C \leq T_A \leq 85^{\circ}C$	0.585	0.600	0.615	V
Reference Voltage Line Regulation	$V_{IN}=2.5V$ to $5.5V$		0.1		%/V
Output Voltage Accuracy	$V_{IN} = 2.5V$ to $5.5V$, $I_{OUT}=10mA$ to $2000mA$	-3		+3	% V_{OUT}
Output Voltage Load Regulation	$I_{OUT}=10mA$ to $2000mA$		0.2		%/A
Oscillation Frequency	$V_{OUT}=100\%$		1.0		MHz
	$V_{OUT}=0V$		300		kHz
On Resistance of PMOS	$I_{LX}=100mA$		95		m Ω
On Resistance of NMOS	$I_{LX}=-100mA$		50		m Ω
Peak Current Limit	$V_{IN}=5V$, $V_{OUT}=90\%$	3			A
EN High Level Input Voltage		1.5			V
EN Low Level Input Voltage				0.5	V
EN Leakage Current			± 0.01	± 1.0	μA
Power Good Threshold (for TMI3113)	Reference to V_{FB} voltage		91%		
LX Leakage Current	$V_{EN}=0V$, $V_{IN}=V_{LX}=5V$		± 0.01	± 1.0	μA
Thermal Shutdown Threshold (Note 4)			155		$^{\circ}C$
Thermal Shutdown Hysteresis (Note 4)			20		$^{\circ}C$

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Note 2: T_J is calculated from the ambient temperature T_A and power dissipation P_D according to the following formula: $T_J = T_A + (P_D) \times \theta_{JA}$.

Note 3: 100% production test at $+25^{\circ}C$. Specifications over the temperature range are guaranteed by design and characterization.

Note 4: Thermal shutdown threshold and hysteresis are guaranteed by design.

OPERATION

The TMI3113 and TMI3113B are high output current monolithic switch mode step-down DC-DC converter. The devices operate at a fixed 1.0MHz switching frequency, and uses a slope compensated current mode architecture.

This step-down DC-DC converter can supply up to peak 3A output current and has an input voltage range from 2.7V to 5.5V. It minimizes external component size and optimizes efficiency at the heavy load range. The slope compensation allows the device to remain stable over a wider range of inductor values so that smaller values with lower DCR can be used to achieve higher efficiency. Only a small bypass input capacitor is required at the output.

The adjustable output voltage can be programmed with external feedback to any voltage, ranging from 0.6V to near the input voltage. It uses internal MOSFETs to achieve high efficiency and can generate very low output voltages by using an internal reference of 0.6V. At dropout operation, the converter duty cycle increases to 100% and the output voltage tracks the input voltage minus the low $R_{DS(ON)}$ drop of the P-channel high-side MOSFET and the inductor DCR. The internal error amplifier and compensation provides excellent transient response, load and line regulation. Internal soft start eliminates any output voltage overshoot when the enable or the input voltage is applied. TMI3113 also has power good open drain output to indicate output voltage status. The PG pin goes high impedance when the output is above 91% of regulated nominal voltage and PG pin is pulled low once output voltage falls below the threshold.

FUNCTIONAL BLOCK DIAGRAM

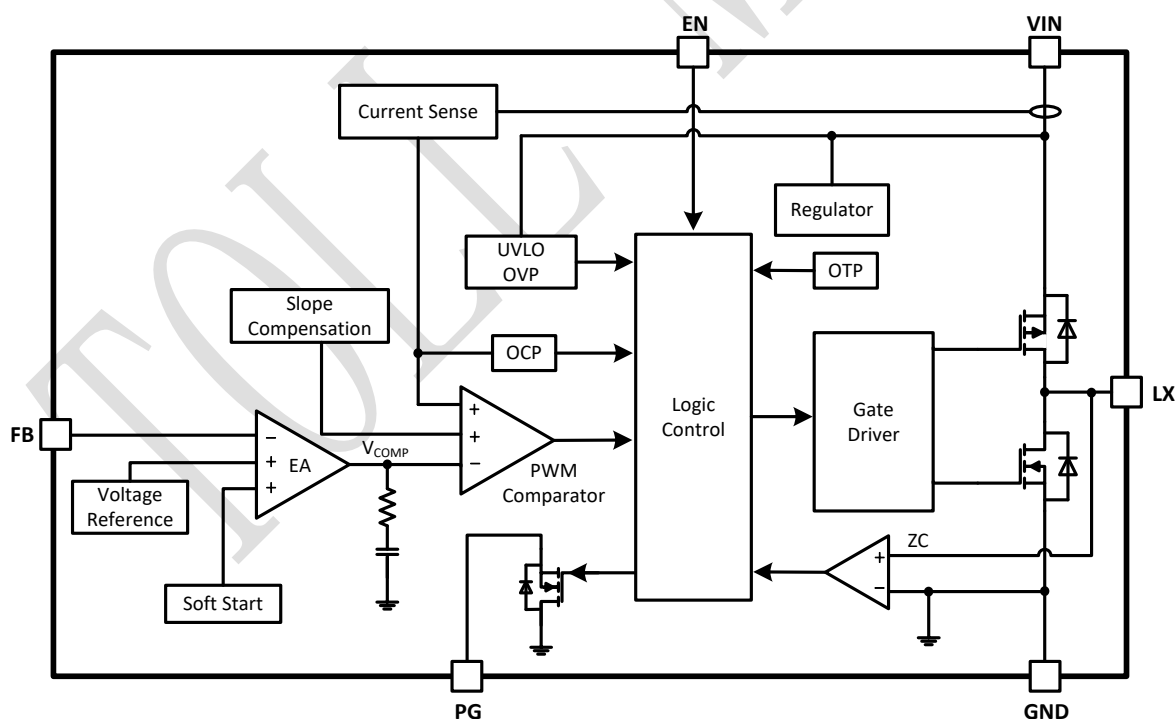


Figure 1. TMI3113 Block Diagram

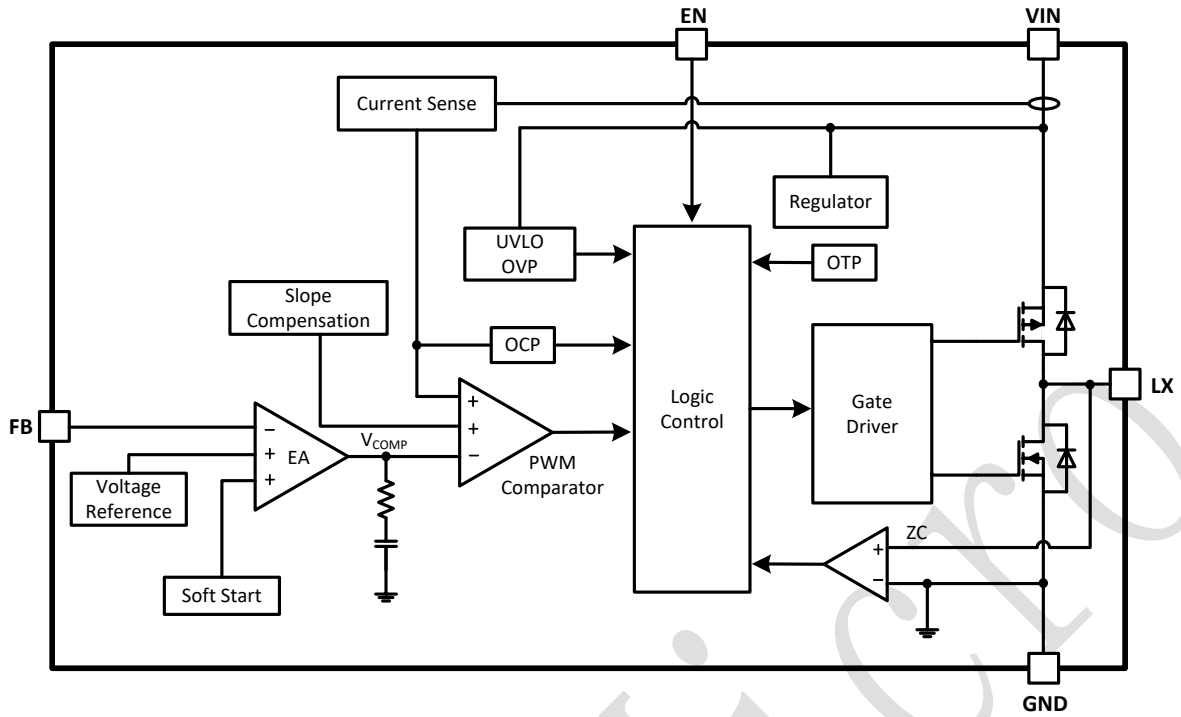


Figure 2. TMI3113B Block Diagram

APPLICATION INFORMATION

Setting the Output Voltage

In the first page, the typical application circuit for the TMI3113/TMI3113B is shown. The output voltage of TMI3113/TMI3113B can be externally programmed. Resistors R1 and R2 in typical application program the output to regulate at a voltage higher than 0.6V.

The external resistor sets the output voltage according to the following equation:

$$V_{OUT} = 0.6 \times \left(1 + \frac{R_1}{R_2}\right)$$

$$R_1 = (V_{OUT} / 0.6 - 1) \times R_2$$

Inductor Selection

For most designs, 2.2μH inductance can satisfy most application conditions. Inductance value is related to inductor ripple current value, input voltage, output voltage setting and switching frequency. The inductor value can be derived from the following equation:

$$L = \frac{V_{OUT} \times (V_{IN} - V_{OUT})}{V_{IN} \times \Delta I_L \times f_{OSC}}$$

Where ΔI_L is inductor ripple current. Large value inductors result in lower ripple current and small value inductors result in high ripple current, so inductor value has effect on output voltage ripple value. DC resistance of inductor which has impact on efficiency of DC/DC converter should be taken into account when selecting the inductor.

Input Capacitor Selection

The input capacitor reduces the surge current drawn from the input and switching noise from the device. The input capacitor impedance at the switching frequency should be less than input source impedance to prevent high frequency switching current passing to the input. A low ESR input capacitor sized for maximum RMS current must be used. Ceramic capacitors with X5R or X7R dielectrics are highly recommended because of their low ESR and small temperature coefficients. A 22μF effective capacitance value ceramic capacitor for most applications is sufficient. A large value may be used for improved input voltage filtering.

Output Capacitor Selection

The output capacitor is required to keep the output voltage ripple small and to ensure regulation loop stability. The output capacitor must have low impedance at the switching frequency. Ceramic capacitors with X5R or X7R dielectrics are recommended due to their low ESR and high ripple current ratings. The output ripple ΔV_{OUT} is determined by:

$$\Delta V_{OUT} \leq \frac{V_{OUT} \times (V_{IN} - V_{OUT})}{V_{IN} \times f_{OSC} \times L} \times \left(ESR + \frac{1}{8 \times f_{osc} \times C3} \right)$$

A 22μF effective capacitance value ceramic capacitor can satisfy most applications.

Layout Consideration

When laying out the printed circuit board, the following checking should be used to ensure proper operation of the TMI3113/TMI3113B. Check the following in your layout:


1. The power traces, consisting of the GND trace, the LX trace and the VIN trace should be kept short, direct and wide.
2. Does the (+) plates of C_{IN} connect to V_{in} as closely as possible. This capacitor provides the AC current to the internal power MOSFETs.
3. Keep the switching node, LX, away from the sensitive VOUT node.
4. Keep the (-) plates of C_{IN} and C_{OUT} as close as possible.

TOLL Micro

TYPICAL PERFORMANCE CHARACTERISTICS


Efficiency at $V_{IN} = 5V$

$V_{IN} = 5V$, $L = 2.2\mu H$, $DCR = 20m\Omega$

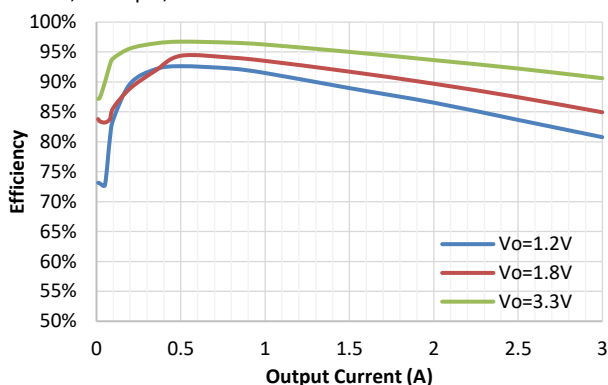


Efficiency at $V_{IN} = 3.3V$

$V_{IN} = 3.3V$, $L = 2.2\mu H$, $DCR = 20m\Omega$

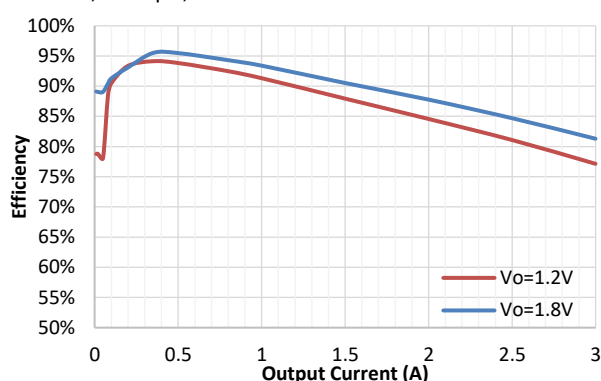


Line Regulation at $V_{OUT} = 1.2V$

$V_{OUT} = 1.2V$, $T_A = 25^\circ C$

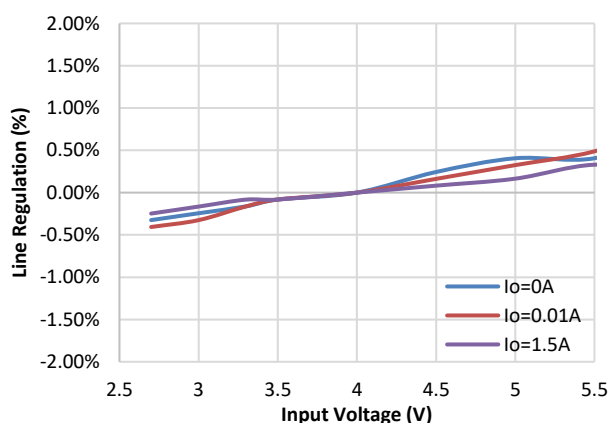


Load Regulation at $V_{IN} = 5V$

$V_{IN} = 5V$, $T_A = 25^\circ C$

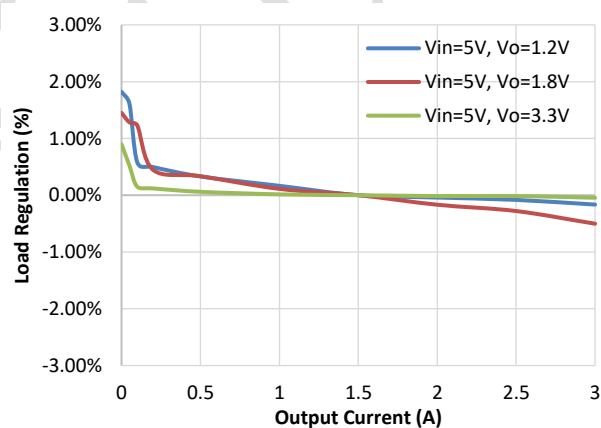


Steady State Operation

$V_{IN} = 5V$, $V_{OUT} = 3.3V$, No Load

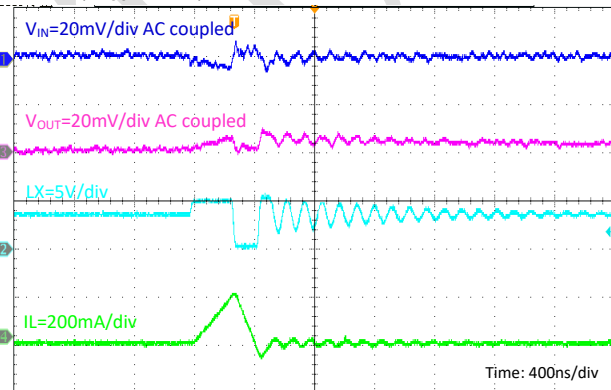

Steady State Operation


$V_{IN} = 5V$, $V_{OUT} = 3.3V$, $I_o = 3A$

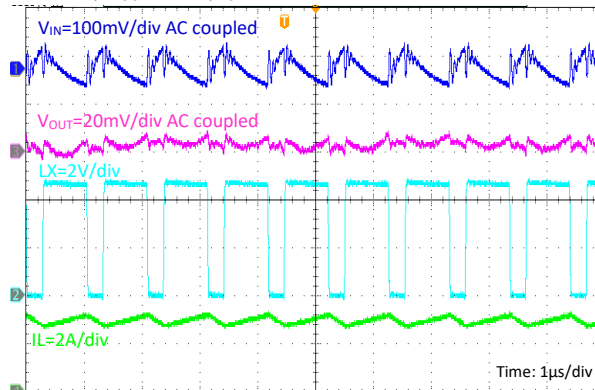

TYPICAL PERFORMANCE CHARACTERISTICS (continued)


Load Transient

$V_{IN} = 5V, V_{OUT} = 3.3V, I_o = 0A \text{ to } 1.5A$

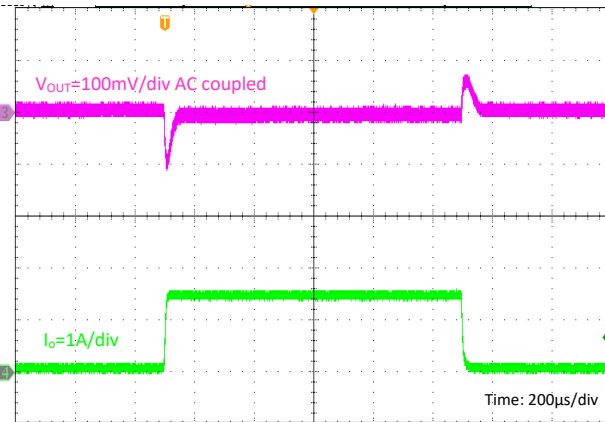


Load Transient

$V_{IN} = 5V, V_{OUT} = 3.3V, I_o = 1.5A \text{ to } 3A$

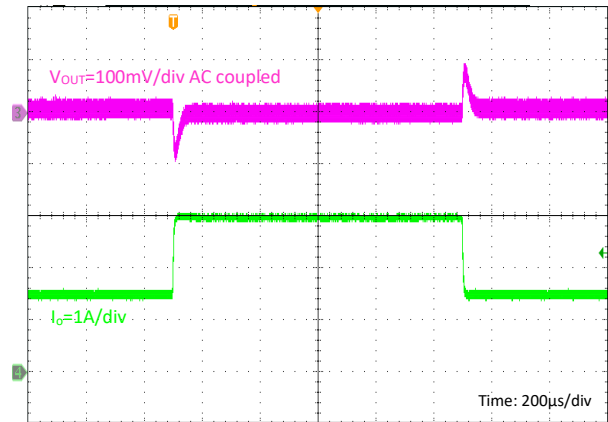


Output Short Entry

$V_{IN} = 5V, V_{OUT} = 3.3V, \text{No Load}$

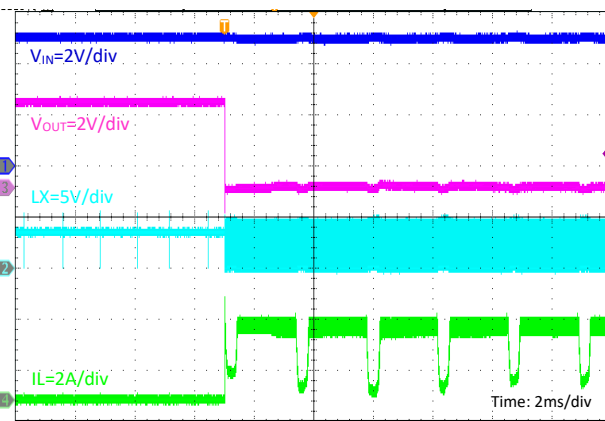


Output Short Recovery

$V_{IN} = 5V, V_{OUT} = 3.3V, \text{No Load}$

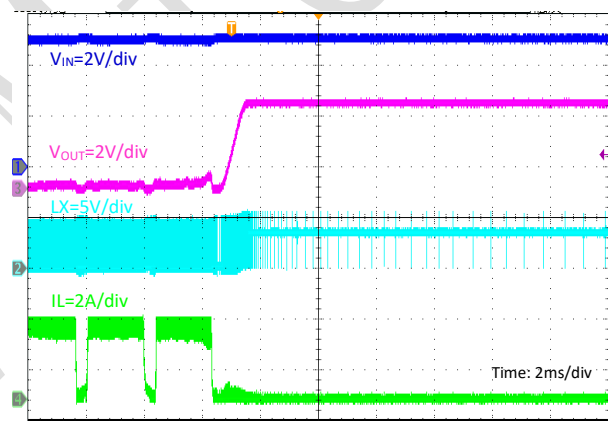


Output Short Entry

$V_{IN} = 5V, V_{OUT} = 3.3V, I_o = 3A$

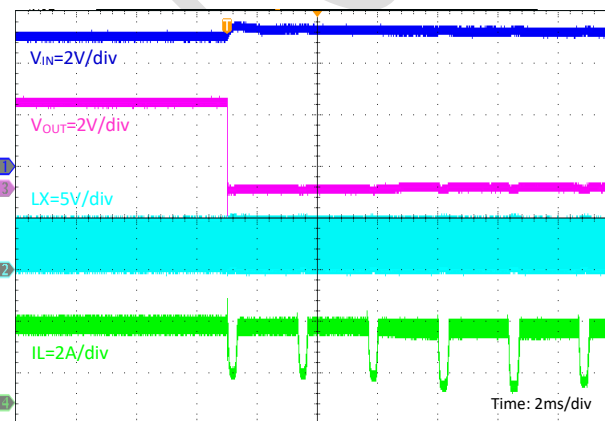

Output Short Recovery


$V_{IN} = 5V, V_{OUT} = 3.3V, I_o = 3A$

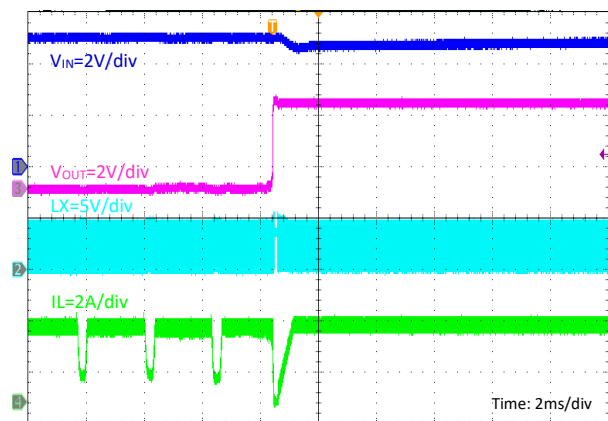

TYPICAL PERFORMANCE CHARACTERISTICS (continued)


EN Enable Power On

$V_{IN} = 5V, V_{OUT} = 3.3V, I_o = 3A$

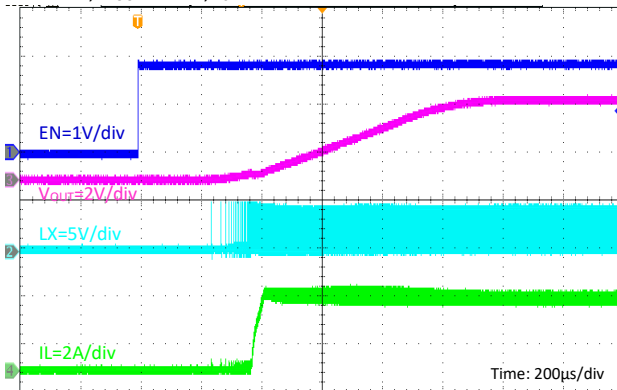


EN Disable Power down

$V_{IN} = 5V, V_{OUT} = 3.3V, I_o = 3A$

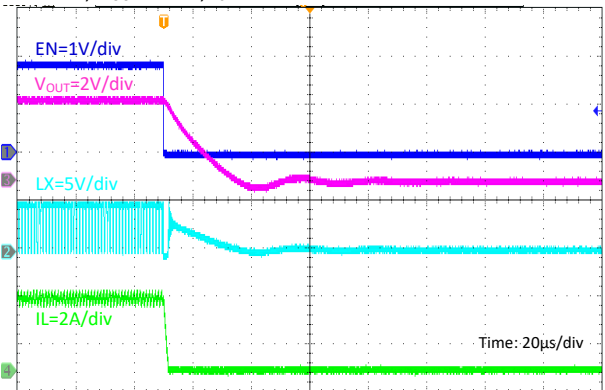


Input Power On

$V_{IN} = 5V, V_{OUT} = 3.3V, \text{No Load}$

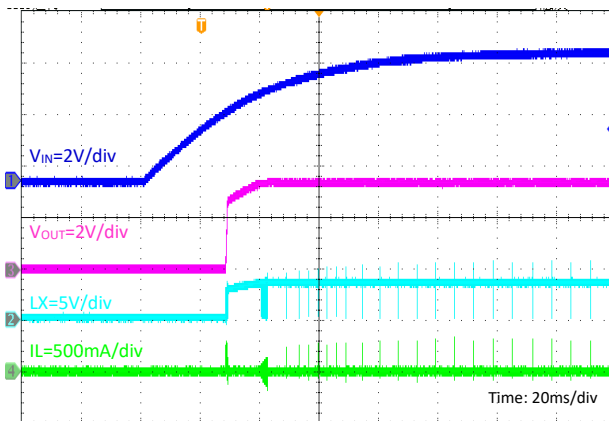


Input Power Down

$V_{IN} = 5V, V_{OUT} = 3.3V, \text{No Load}$

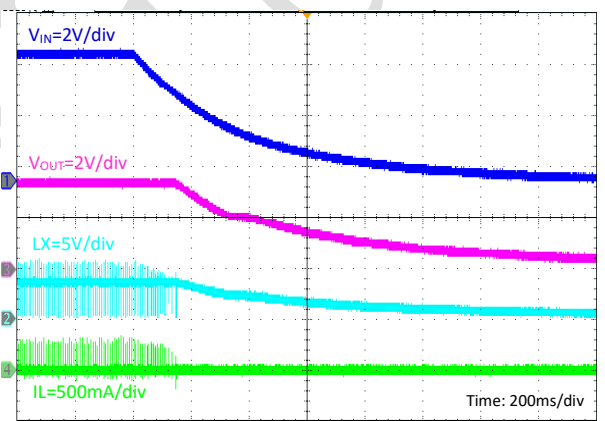

PACKAGE INFORMATION

SOT23-5

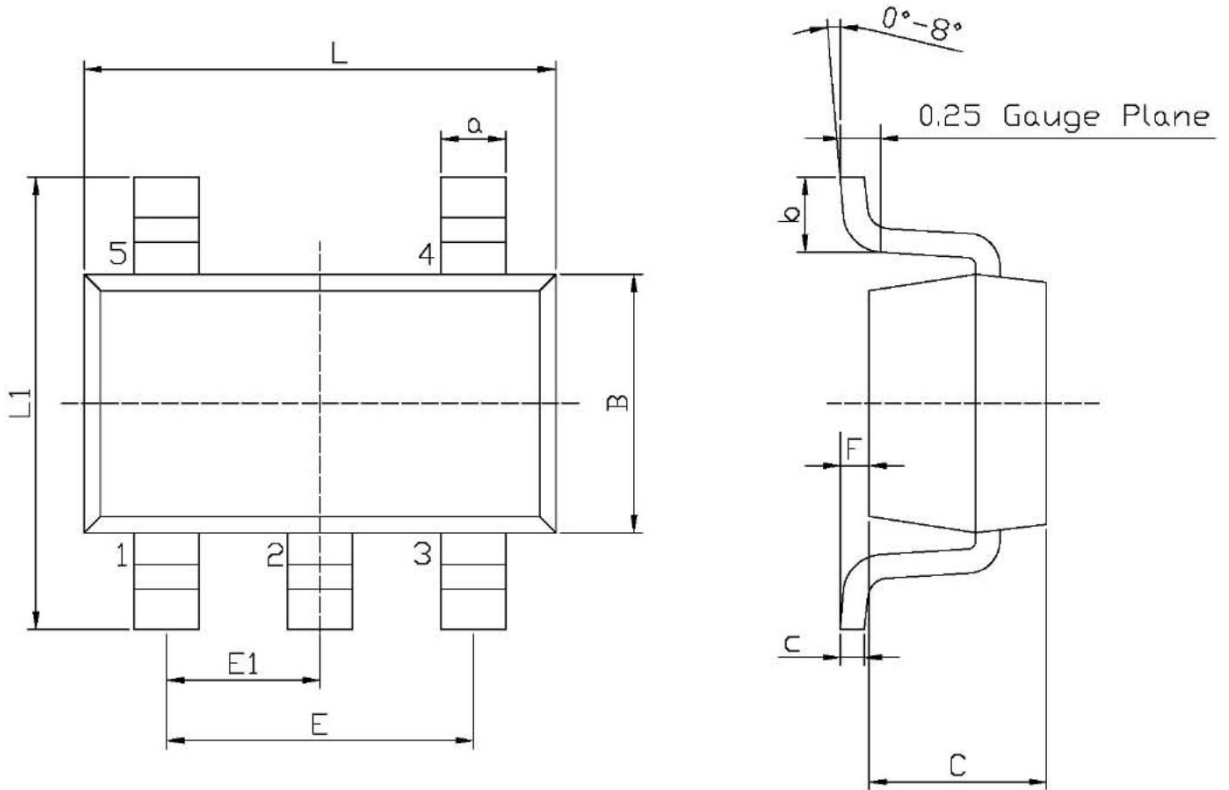

Unit: mm


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.82	3.02	E1	0.85	1.05
B	1.50	1.70	a	0.35	0.50
C	0.90	1.30	c	0.10	0.20
L1	2.60	3.00	b	0.35	0.55
E	1.80	2.00	F	0	0.15

Note:


- 1) All dimensions are in millimeters.
- 2) Package length does not include mold flash, protrusion or gate burr.
- 3) Package width does not include interlead flash or protrusion.
- 4) Lead popularity (bottom of leads after forming) shall be 0.10 millimeters max.
- 5) Pin 1 is lower left pin when reading top mark from left to right.

TAPE AND REEL INFORMATION

TAPE DIMENSIONS: SOT23-5

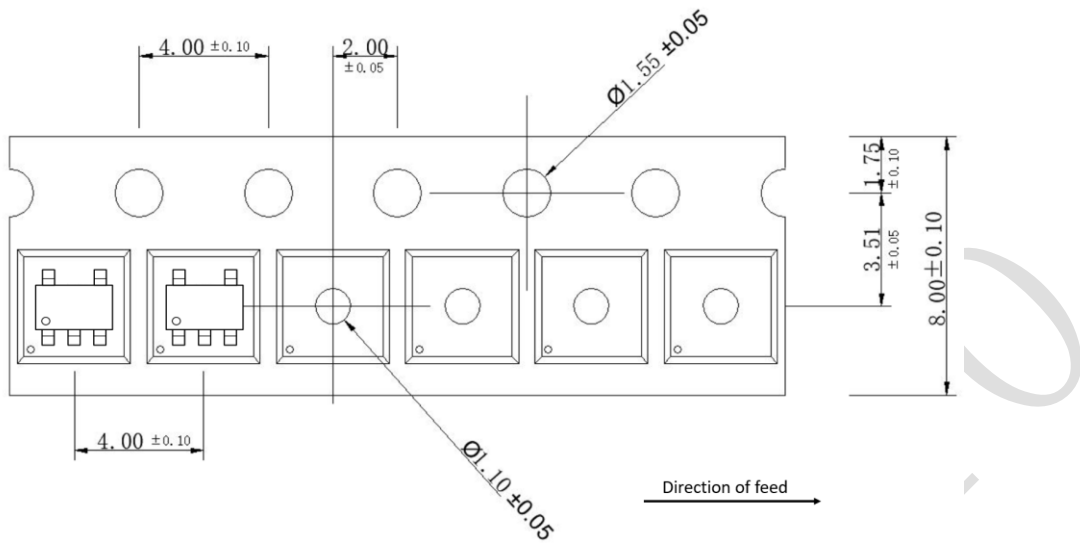

REEL DIMENSIONS: SOT23-5

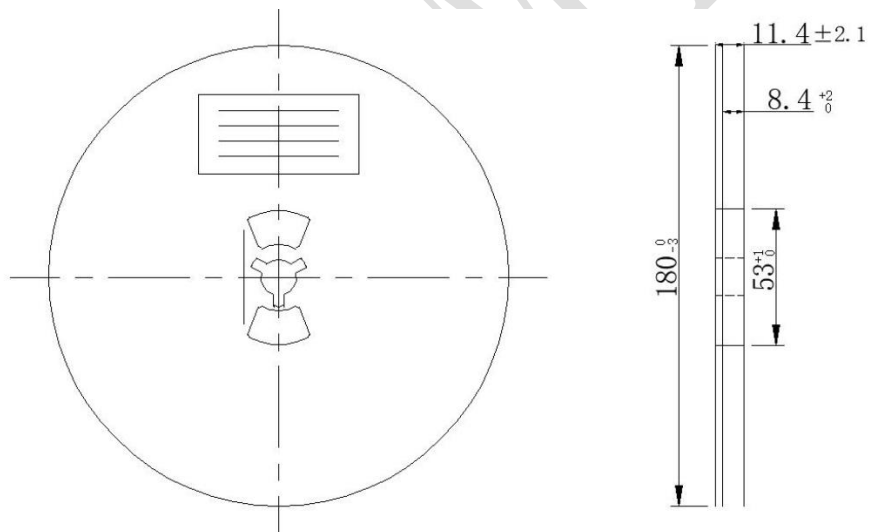


Note:

- 1) All Dimensions are in Millimeter
- 2) Quantity of Units per Reel is 3000
- 3) MSL level is level 3.

PACKAGE INFORMATION

SOT23-6

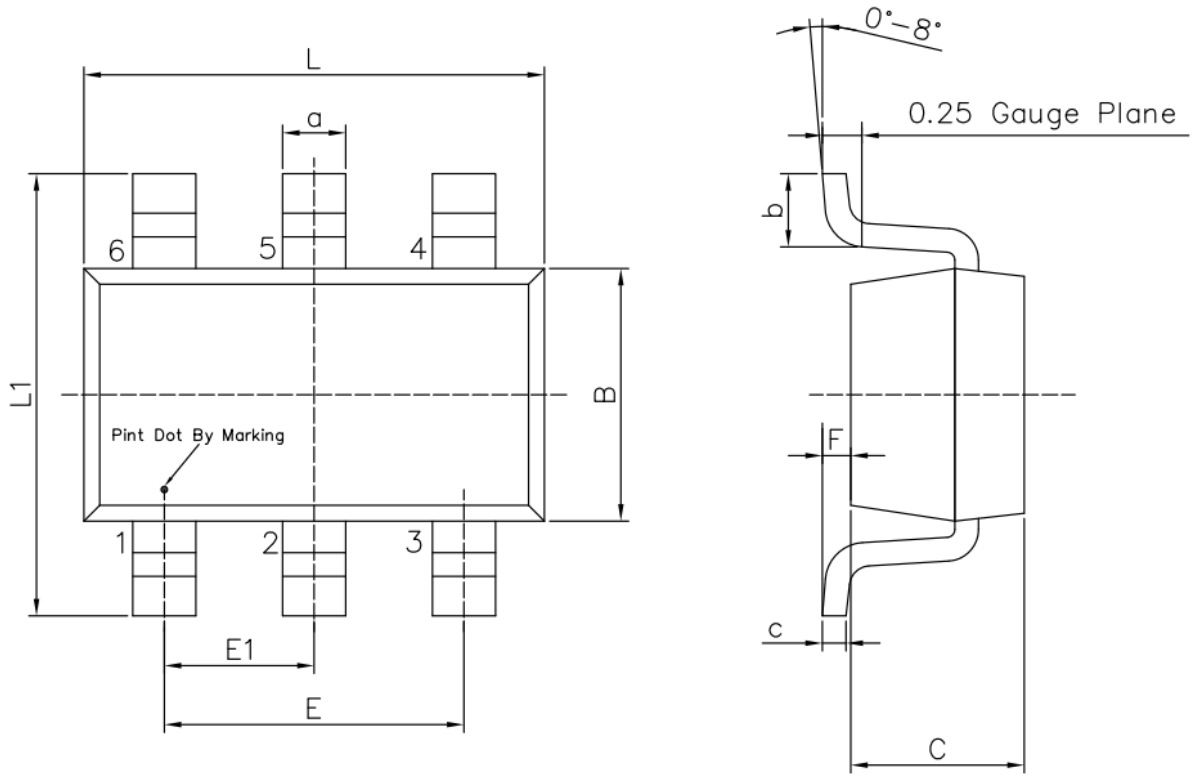

Unit: mm


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.82	3.02	E1	0.85	1.05
B	1.50	1.70	a	0.35	0.50
C	0.90	1.30	c	0.10	0.20
L1	2.60	3.00	b	0.35	0.55
E	1.80	2.00	F	0	0.15

Note:


- 1) All dimensions are in millimeters.
- 2) Package length does not include mold flash, protrusion or gate burr.
- 3) Package width does not include inter lead flash or protrusion.
- 4) Lead popularity (bottom of leads after forming) shall be 0.10 millimeters max.
- 5) Pin 1 is lower left pin when reading top mark from left to right.

TAPE AND REEL INFORMATION

TAPE DIMENSIONS: SOT23-6

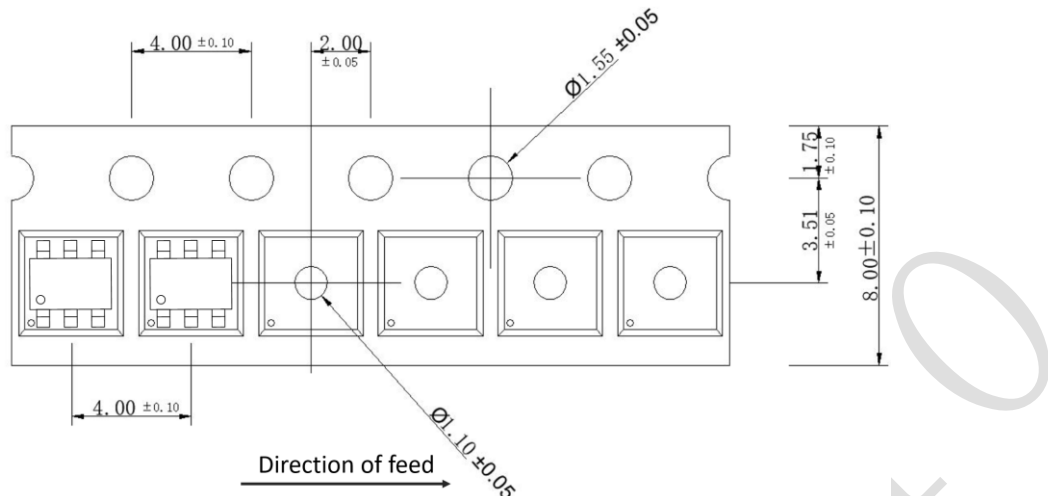

REEL DIMENSIONS: SOT23-6

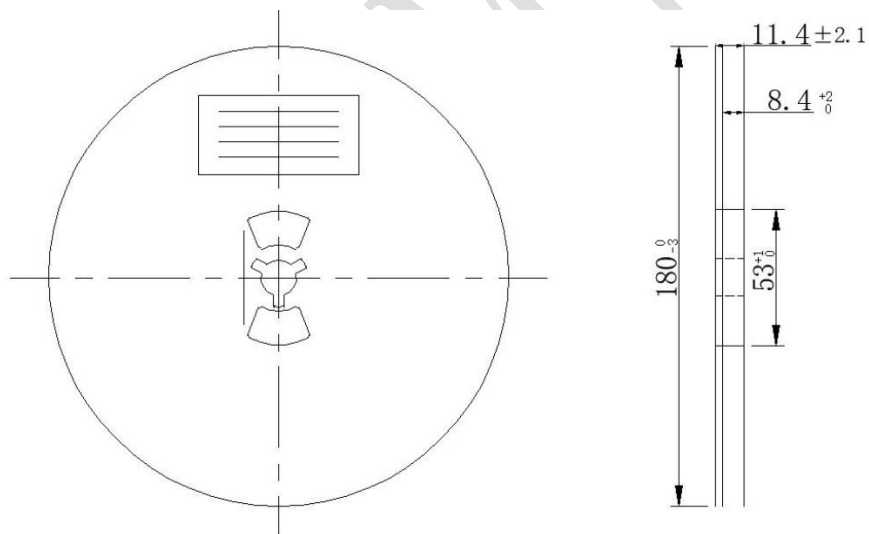

Note:

- 4) All Dimensions are in Millimeter
- 5) Quantity of Units per Reel is 3000
- 6) MSL level is level 3.