

---

## Description

---

The AP3927D is a universal AC/DC offline regulator with low standby power, which is specially designed for IoT applications and home appliances with non-isolated buck solution or buck-boost solution.

The device integrates the controller and a 700V high-performance power MOSFET into one monolithic device. Coordinating with a single-winding inductor, it uses minimum external components and provides a low Bill Of Material (BOM) cost solution.

The AP3927D supports fixed frequency CCM mode with heavy load, and PFM (Pulse Frequency Modulation) operation at light load. Since the peak current is very low for light-load operation, it ensures an excellent audible noise-free performance.

The AP3927D has multiple protection features to enhance the system safety and reliability, which include overtemperature protection, undervoltage lockout function, output short protection, and overload protection.

The AP3927D is available in SO-7 (Type B) package.

---

## Features

---


- Universal 85V<sub>AC</sub> to 277V<sub>AC</sub> Input Range
- Internal MOSFET of 700V
- Maximal Peak Current: 650mA Typical
- Typical Output Current: 360mA
- Improved Constant Voltage: ±5%
- Low No-Load Power Consumption
- No Audible Noise Solution
- Support Topology: Buck, Boost, Buck-Boost
- Frequency Dithering to Suppress EMI
- Various Protections
  - OTP (Overtemperature Protection)
  - OLP (Overload Protection)
  - SCP (Short-Circuit Protection)
  - OVP (Overvoltage Protection)
- SO-7 (Type B) Package
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](mailto:contact@diodes.com) or your local Diodes representative. <https://www.diodes.com/quality/product-definitions/>**

Notes: 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.  
 2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.  
 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

---

## Pin Assignments

---

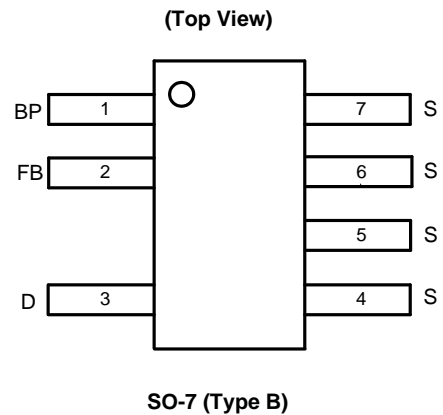



---

## Applications

---

- IoT applications: smoke detectors, fire alarms
- Non-isolated home appliances: AC fans, rice cookers, shavers, milk machines, ceiling lights
- Industrial controls
- Standby and auxiliary power supply units

**Typical Applications Circuit**

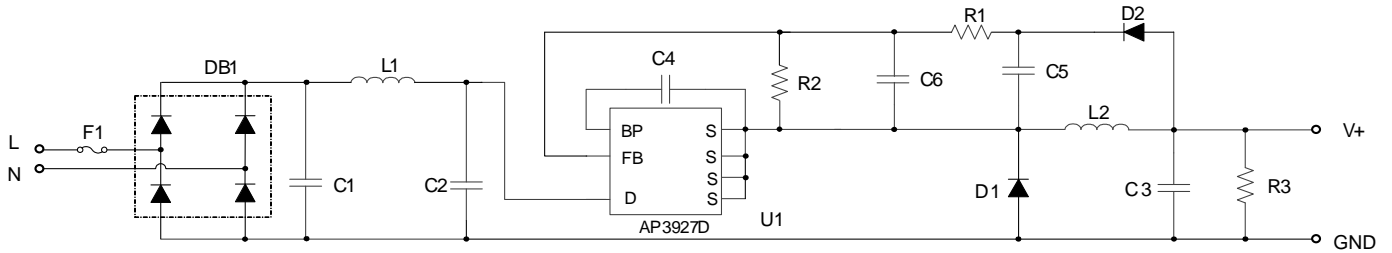


**High-Side Buck-Direct Feedback**

**Pin Descriptions**

Pin Number	Pin Name	Function
1	BP	Connection Point of External Bypass Capacitor for Internally Generated Power Supply for Control Circuit.
2	FB	Regulator Feedback.
3	D	Internal Power MOSFET Drain. High-Voltage Current Source Input.
4, 5, 6, 7	S	Internal Power MOSFET Source. Ground Reference for BP and FB Pins.

**Functional Block Diagram**

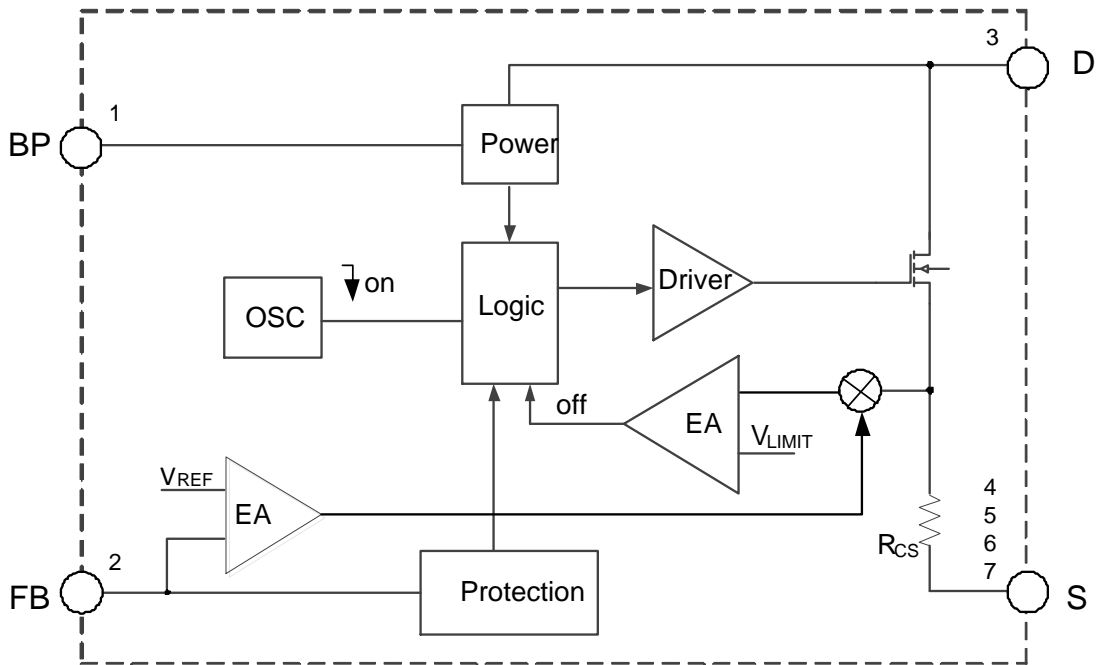

## Absolute Maximum Ratings (Note 4)

Symbol	Parameter	Rating	Unit
V <sub>DSS</sub>	Drain Pin Voltage (Note 5)	-0.3 to 700	V
V <sub>BP</sub>	Internally Generated Control Circuit Power Supply Voltage	-0.3 to 7.0	V
V <sub>FB</sub> , V <sub>S</sub>	FB Pin and S Pin Voltage	-0.3 to 7.0	V
P <sub>D</sub>	Continuous Power Dissipation (T <sub>A</sub> = +25°C)	1	W
T <sub>J</sub>	Operating Junction Temperature	+150	°C
T <sub>STG</sub>	Storage Temperature	-65 to +150	°C
T <sub>LEAD</sub>	Lead Temperature (Soldering, 10s)	+300	°C
θ <sub>JA</sub>	Thermal Resistance – SO-7 (Type B) Package (Junction to Ambient) (Note 6)	58	°C/W
θ <sub>JC</sub>	Thermal Resistance – SO-7 (Type B) Package (Junction to Case) (Note 6)	6	°C/W
—	ESD (Human Body Model)	2000	V
—	ESD (Charge Device Model)	1000	V

- Notes:
- Stresses greater than those listed under *Absolute Maximum Ratings* can cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to *Absolute Maximum Ratings* for extended periods can affect device reliability.
  - The drain-source voltage is 80% of V<sub>DS</sub> in the aging condition.
  - Test condition: device mounted on FR-4 substrate PC board, 2oz copper, with 1inch<sup>2</sup> cooling area.

## Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V <sub>BP</sub>	Supply Voltage	4.85	5.55	V
V <sub>DSS</sub>	Drain-Source Voltage (Note 6)	—	560	V
T <sub>A</sub>	Ambient Temperature	-40	+125	°C


**Electrical Characteristics** ( $V_{BP} = 5.0V$ ,  $-40^{\circ}C < T_A < +125^{\circ}C$ , unless otherwise specified.)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
<b>HV Startup Current Source</b>						
$I_{HV}$	HV Supply Current	$V_{BP} = 4.5 V$	0.5	1.18	—	mA
$I_{LEAK}$	Leakage Current of Drain	$V_{BP} = 5.5V$ $V_{DRAIN} = 400V$ $T_A = +25^{\circ}C$	—	5	12.3	$\mu A$
<b><math>V_{BP}</math> Voltage Management</b>						
$V_{BP\_HVON}$	$V_{BP}$ Decreasing Level at which HV Supply is ON	—	4.25	4.6	4.95	V
$V_{BP\_HVOFF}$	$V_{BP}$ Increasing Level at which HV Supply is OFF	—	4.85	5.2	5.55	V
$V_{BP\_HYS}$	Bypass Pin Hysteresis	—	—	600	—	mV
$V_{BP\_UVLO}$	$V_{BP}$ Minimum Operating Voltage	$T_A = +25^{\circ}C$	3.15	3.5	—	V
$I_{BP1}$	$V_{BP}$ Operating Current with MOSFET Switching (Full Load)	$V_{BP} = 5V$ $D = 67\%$ , $T_A = +25^{\circ}C$	—	410	580	$\mu A$
$I_{BP2}$	$V_{BP}$ Quiescent Current (No Load)	$T_A = +25^{\circ}C$	—	245	354	$\mu A$
<b>Internal MOSFET</b>						
$V_{DSS}$	Breakdown Voltage	$T_A = +25^{\circ}C$ (Note 7)	700	—	—	V
$R_{DS(ON)}$	ON Resistance	$T_A = +25^{\circ}C$ , $I_D = 45mA$	—	7	—	$\Omega$
$I_{DSS}$	OFF-State Drain Leakage Current	$T_A = +25^{\circ}C$ , $V_{DS} = 560V$ $V_{BP} = 5V$	—	—	100	$\mu A$
<b>Internal Current Sense</b>						
$t_{LEB1}$	Leading-Edge Blanking (Note 8)	$T_A = +25^{\circ}C$	—	250	—	ns
$I_{PK\_LIMIT}$	Standard Current Limit	$T_A = +25^{\circ}C$	590	650	—	mA
$t_{LEB2}$	Leading-Edge Blanking for Short-Circuit Protection (Note 8)	$T_A = +25^{\circ}C$	—	200	—	ns
$I_{SCP\_TH}$	SCP Threshold	—	—	1.25 x $I_{PK\_LIMIT}$	—	mA
<b>Feedback Input (FB Pin)</b>						
$V_{FB}$	Feedback Pin Reference Voltage	$V_{BP} = 5.0V$ to $5.5V$ $T_A = +25^{\circ}C$	1.9	2	2.1	V
$f_{OSC}$	Output Frequency	$T_A = +25^{\circ}C$	28	33	39	kHz
$D_{MAX}$	Maximum Duty Cycle	—	60	68	76	%
$V_{FB\_OLP}$	Feedback Threshold for OLP	—	—	1.4	—	V
$t_{OLP}$	OLP Delay Time	—	—	200	—	ms
$V_{OLD}$	Open-Loop Detection Voltage	$T_A = +25^{\circ}C$	—	100	—	mV
<b>Overtemperature Protection</b>						
$T_{OTP}$	Thermal Shutdown Threshold (Note 8)	—	+135	+150	+165	$^{\circ}C$
$T_{OTP\_HYS}$	Thermal Shutdown Hysteresis (Note 8)	—	—	+50	—	$^{\circ}C$


Notes: 7. The drain-source voltage is 80% of  $V_{DS}$  in the aging condition.  
8. Guaranteed by design.

**Performance Characteristics**


**FB Voltage vs. Ambient Temperature**

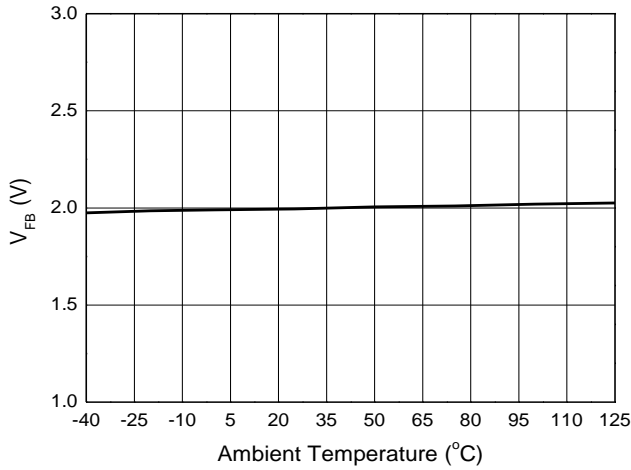


**V<sub>BP\_HVON</sub> Voltage vs. Ambient Temperature**

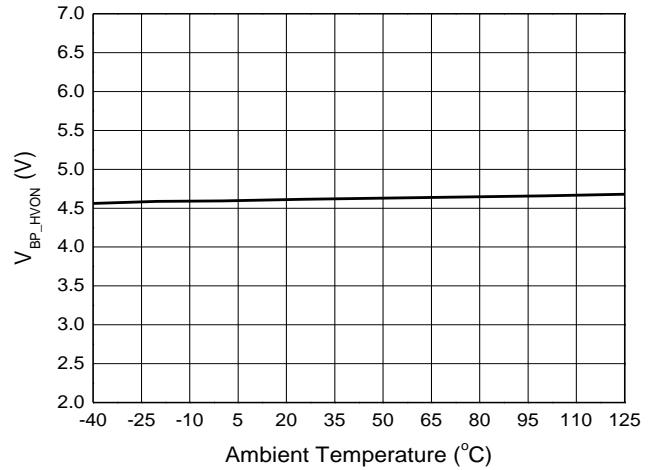

**V<sub>BP\_HVOFF</sub> Voltage vs. Ambient Temperature**

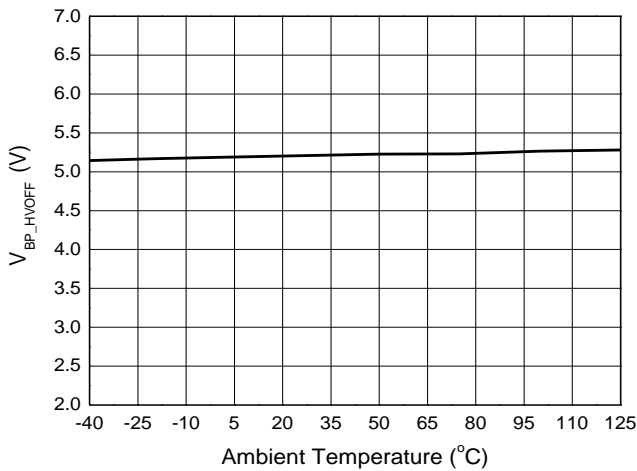

**R<sub>DS(ON)</sub> vs. Ambient Temperature**

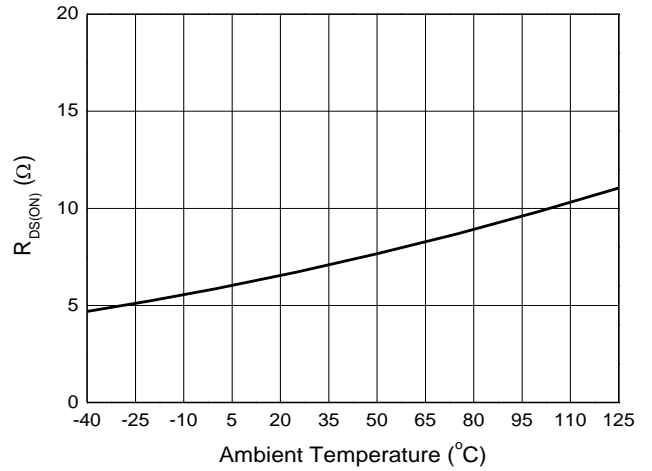

## Operation Description

### Overall Introduction


The AP3927D is a universal offline regulator, which integrates a 700V high-voltage power MOSFET into one monolithic device. The feedback voltage signal derives from a resistor-divided network, which connected to output through rectifier diodes. The device is suitable for non-isolated AC-to-DC low buck and buck-boost configuration with level shifted direct feedback. Coordinating with an external single-winding inductor can achieve a low BOM cost solution.

### Startup Control and $V_{BP}$ Supply

To ensure a safe startup, a three-stage frequency control method is designed for AP3927D soft-start control. The initial switching frequency will keep 0.25 times maximum fixed frequency in stage I, sequentially shift to 0.5 times maximum fixed frequency in stage II. Finally, it rises to the maximum fixed frequency in stage III. Both stage I and stage II include 64 switching cycles.

The internal high-voltage regulator provides charging current for  $V_{BP}$ . When the BP voltage is charged to  $V_{BP\_HVOFF}$ , the IC starts up, and the internal high-voltage regulator turns off. Along with the BP voltage slowly drops below  $V_{BP\_HVON}$ , the internal high-voltage regulator turns on again to charge the external BP capacitor.

Figure 1 shows the typical waveform of startup and HV regulator ON/OFF control.

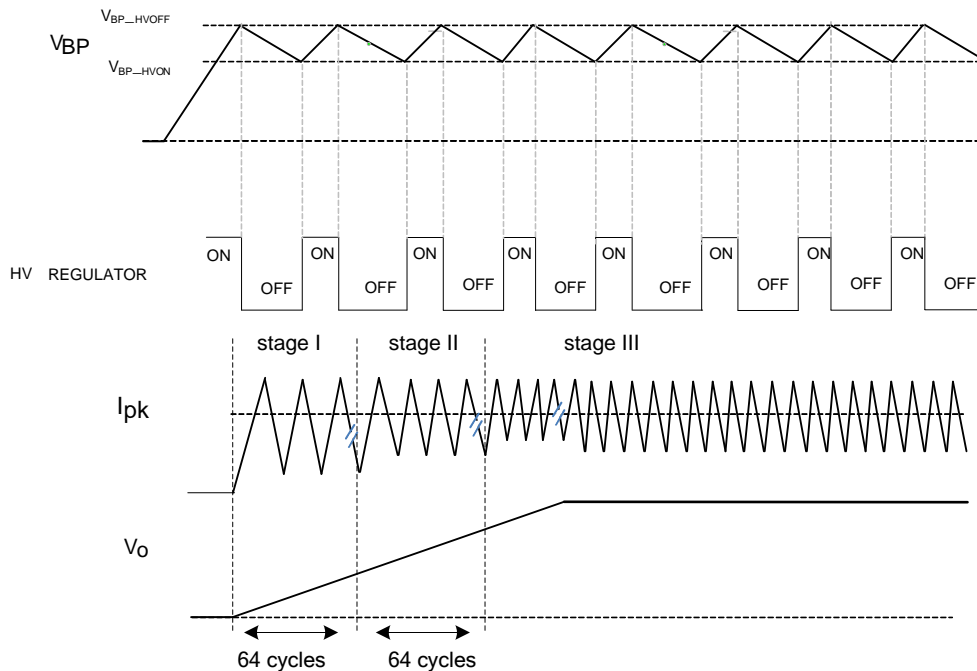


**Figure 1. Startup and HV Regulator ON/OFF Control**

### Operation Frequency and Peak Current Characteristics

The power system operates with 33kHz fixed frequency mode in heavy load. When the load current decreases, the switching frequency will keep 33kHz and the inductor peak current will follow the output current to go lower. Due to most of load range operating at a relative high frequency, so the audible noise-free performance is excellent. Once the peak current drops to the minimum peak current limit  $I_{PK\_MIN}$ , it will keep a constant value, and AP3927D operates in PFM (pulse frequency modulation) mode to improve the system efficiency at light load. Since the peak current is small at no-load condition, it still has no audible noise risk even if the operating frequency drops to 1kHz below. What's more, both the small peak current and low switching frequency is helpful to reduce the standby power consumption.

The switching frequency and peak current curves is shown in Figure 2 as below.


**Operation Description** (continued)

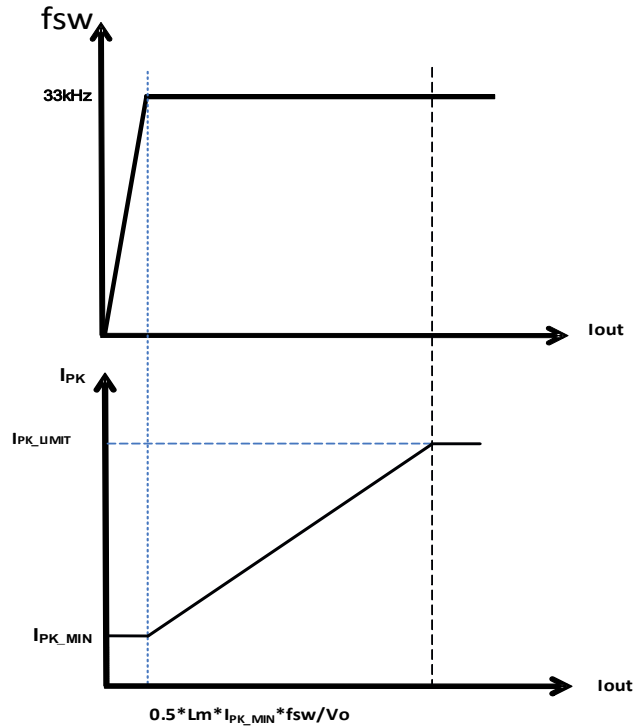

**Figure 2. Switching Frequency and Peak Current vs. Output Current**

**Constant Voltage Operation**

The AP3927D usually uses in buck topology as shown in the typical application circuit. Figure 3 shows the operation diagram under CCM condition. At the beginning of each cycle, the integrated MOSFET turns on by falling edge of the internal oscillator clock signal (CLK), the inductor current  $I_{INDUCTANCE}$  will begin to rise, and the converter delivers power to the load. A current sensing is located between the source of the power MOSFET and the S pin to detect inductor peak current. Unlike low-side buck topology, the  $V_O$  feedback voltage is derived from the sampling capacitor (C5) voltage in high-side buck topology. It is fed back to input of amplifier to generate the amplifier output level, which mixed with  $R_{CS}$  sensing voltage to compare with internal  $V_{LIMIT}$  threshold to decide the shut-off moment of converter.

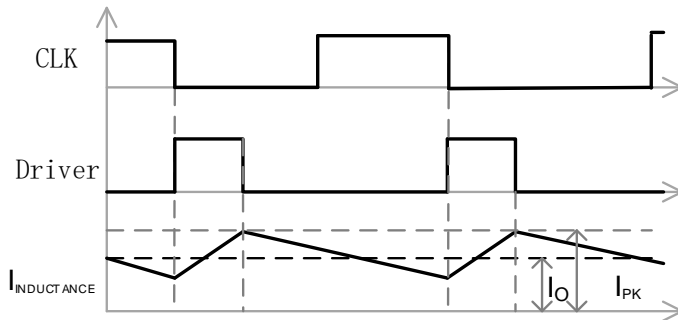

**Figure 3. CCM Operation Diagram**

**Operation Description** (continued)

The ON period time (PWM duty cycle) is determined by the inductor current variable value  $\Delta I_L$ , ( $\Delta I_L$  is the gap of the peak-current limitation value  $I_{PK}$  and the initial inductor current value  $I_{INT}$ ), the inductance value, and the input voltage. The ON time calculation is as follows:

$$t_{ON} = L \cdot \frac{\Delta I_L}{V_{IN\_DC}} = L \cdot \frac{I_{PK} - I_{INT}}{V_{IN\_DC}}$$

Where  $I_{INT}$  is zero in DCM condition.

When the inductor current reaches peak-current limitation, the internal MOSFET will turn off. The inductor current charges the sampling capacitor (C5) and the output capacitor (C3) via the freewheeling diodes D1 and D2 respectively.

The regulated output voltage describes as the following equation:


$$V_O = V_{FB} \times \left( \frac{R_1 + R_2}{R_2} \right)$$

**Auxiliary  $V_{BP}$  Supply for Low Standby Power**

If the output voltage is higher than the voltage of  $V_{BP\_HVON}$ , an auxiliary  $V_{BP}$  supply can be implemented to reduce overall power consumption by connecting a resistor (R5) between C4 and C5, which can eliminate power consumption due to VCC capacitor charging from MOSFET's drain polarity. A standby power of less than 20mW can be achieved in no-load condition.

Figure 4 shows the low standby power circuit with the auxiliary  $V_{BP}$  supply.

The output voltage is not directly sensed in high-side buck. It is sampled and estimated by D2, C5, R1, and R2 feedback loop. Output voltage-sampling capacitor C5 stores output voltage information but not updated in real time. Only when MOSFET turns off can the C5 capacitor achieve the latest output voltage information. Especially, when system operates at no-load condition, the buck converter keeps a low switching frequency, and the feedback loop runs with its own time constant, which is not conducive to output voltage regulation. In order to improve the voltage regulation at no load, the high-side buck topology needs to connect a pre-load resistor R3 at the output terminal to prevent output voltage from going too high.

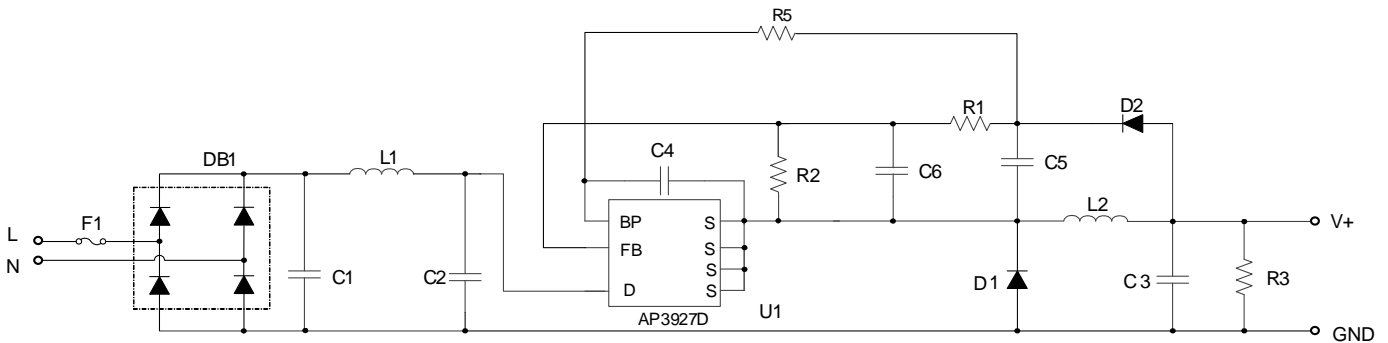

**Figure 4: Low Standby Power Circuit with Auxiliary  $V_{BP}$  Supply**

The value of R5 can be estimated by the following equation:

$$R5 = \frac{V_O - V_{BP\_HVON}}{I_{BP2}}$$




**Operation Description** (continued)

**Overload Protection (OLP) and Short-Circuit Protection (SCP)**

The current limit circuit senses the current flowing through power MOSFET. As the load continues to increase, the inductor peak current will go up. When the peak current reaches the maximum limitation, the MOSFET gate-driving signal is disabled, and the output voltage begins to decrease. Once the output divided-voltage ( $V_{FB}$ ) drops below 1.4V OLP threshold, an internal overload protection timer starts to count. After lasting for 200ms delay time, the device will enter restart status with a 2.8s hiccup time and 200ms switching hold time. This OLP design mechanism can effectively reduce the system power losses and prevent IC from overheating. Figure 5 shows the overload protection time consequence.

To output short-circuit fault,  $V_{FB}$  drops to 1.4V below during a short time, and OLP also will be triggered. The device remains hiccup mode until the shorted issue is removed. To prevent peak current from being unable to be fully reset and rising too high in the output-shortened condition, a frequency reduction method is included to increase inductor demagnetization time. When inductor current increases to  $1.25 \times I_{PK\_LIMIT}$ , the switching frequency will be compulsory to drop to  $1/4 \times f_{osc}$ , thus the inductor can discharge energy sufficiently during the MOSFET off time, and the MOSFET current can keep at a safe level.

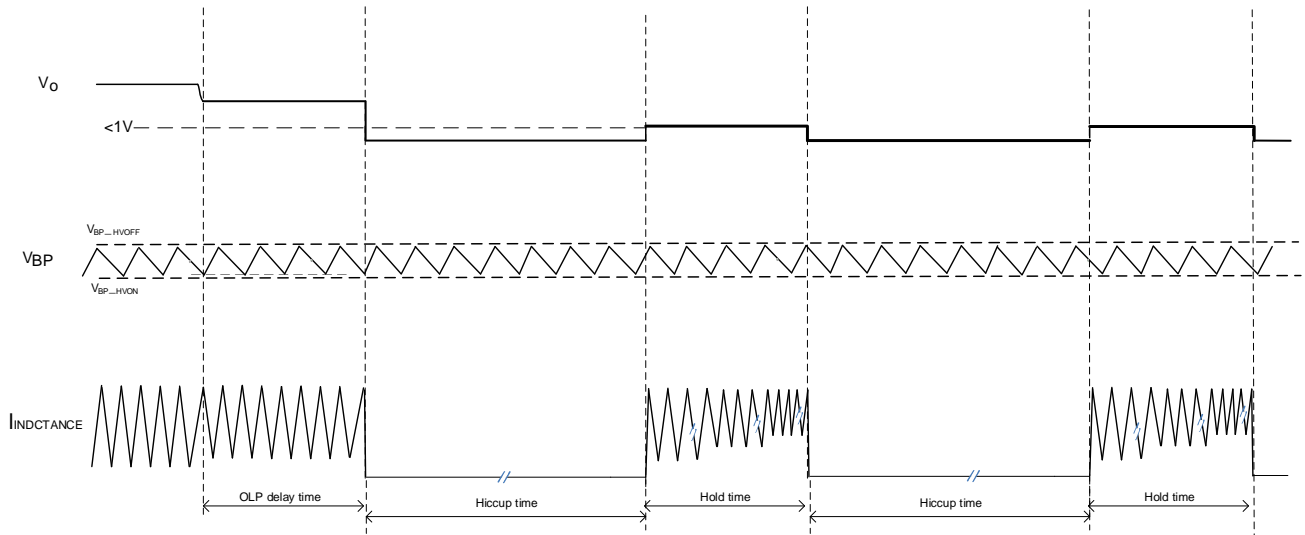

**Figure 5. Overload Protection**

**Open-Loop Detection**

To prevent FB pin or its divided resistor from being open and arousing output voltage dramatic elevation in some occasional condition, the AP3927D integrates open-loop detection function. When the fault occurs and the FB voltage drops below open-loop detection threshold voltage  $V_{OLD}$  (100mV), the AP3927D will stop switching and begin restart cycles. During startup period, the open-loop detection will blank for 64 switching cycles to prevent false triggering.


**Overtemperature Protection (OTP)**

The AP3927D integrates an internal overtemperature protection function. If the junction temperature rises above thermal shutdown threshold  $T_{OTP}$  (+150°C), the overtemperature protection is triggered, and the controller enters restart mode. Once the junction temperature falls by  $T_{OTP\_HYS}$  hysteresis voltage below  $T_{OTP}$ , the protection will be removed, and the device will resume operation.

**Leading-Edge Blanking**


A narrow spike on the leading edge of the current waveform can be observed when the power MOSFET is turned on. It is introduced by parasitic capacitance and reverse recovery of the freewheeling diode. Normally, the leading-edge blanking time  $t_{LEB1}$  is built-in to prevent premature switching pulse termination caused by the turn-on spike. In the case of short circuit, a relatively short  $t_{LEB2}$  leading-edge blanking time is more conducive to suppress inductor current amplitude. During this blanking period, the internal current limit comparator is disabled, and MOSFET keeps turn-on.

**Ordering Information**

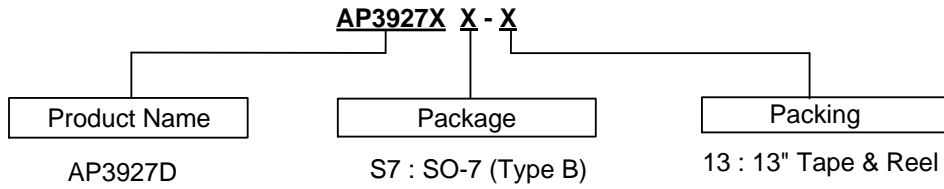

Part Number	Part Number Suffix	Package	Marking ID	Packing	
				Qty.	Carrier
AP3927DS7-13	-13	SO-7 (Type B)	3927D	4000	Tape and Reel


**Marking Information**

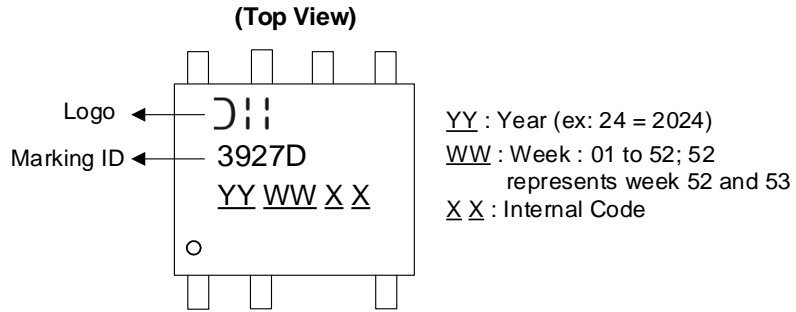

**Package Outline Dimensions**

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**SO-7 (Type B)**

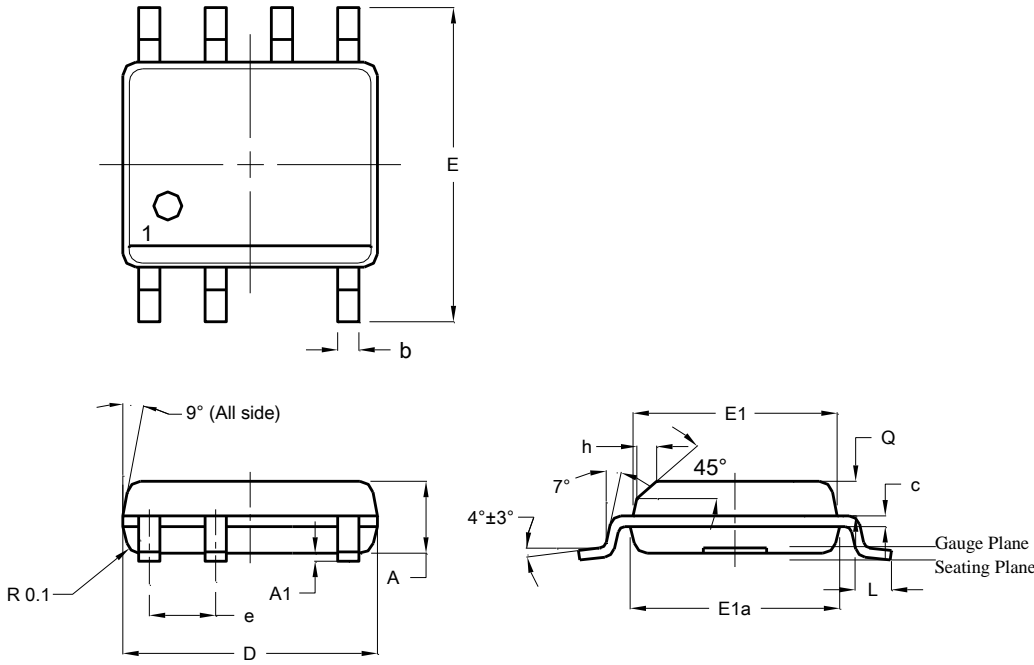


SO-7 (Type B)			
Dim	Min	Max	Typ
A	1.40	1.50	1.45
A1	0.08	0.25	0.15
b	0.30	0.50	0.40
c	0.15	0.25	0.20
D	4.85	4.95	4.90
E	5.90	6.10	6.00
E1	3.80	3.90	3.85
E1a	3.85	3.95	3.90
e	-	-	1.27
h	-	-	0.35
L	0.62	0.82	0.72
Q	0.60	0.70	0.65
All Dimensions in mm			

**Suggested Pad Layout**

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**SO-7 (Type B)**

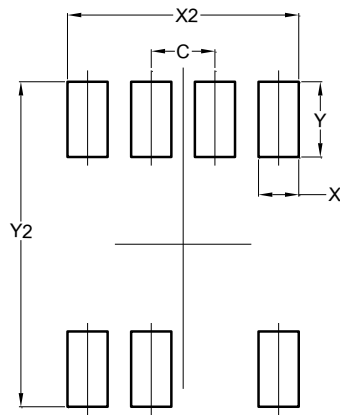

Dimensions	Value (in mm)
C	1.270
X	0.802
X1	4.612
Y	1.505
Y1	6.500

**Mechanical Data**

- Moisture Sensitivity: Level 3 per J-STD-020
- Terminals: Matte Tin Plated Leads, Solderable per M2003 JESD22-B102, Method 208 (E3)
- Weight: 0.077 grams (Approximate)

**IMPORTANT NOTICE**

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
9. This Notice may be periodically updated with the most recent version available at <https://www.diodes.com/about/company/terms-and-conditions/important-notice>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.  
All other trademarks are the property of their respective owners.  
© 2024 Diodes Incorporated. All Rights Reserved.

[www.diodes.com](http://www.diodes.com)