


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.12	阿树

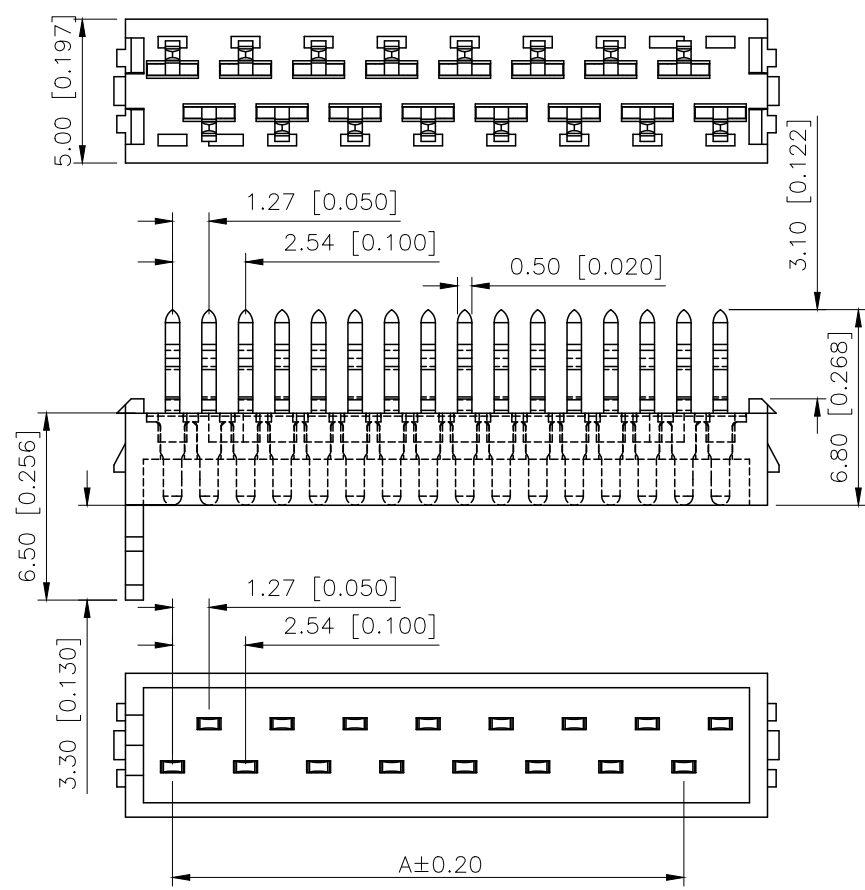

PART NO.:



X9127 W V-XX A4-XX SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:R-Stright 90°
- ④Row No.Pin No:XX-04~26Pin
- ⑤Special No:A4-Lack of on both sides, with the stay column
- ⑥Material: 9T-PA9T UL 94V-0;PT-PBT 94V-0
- ⑦Plating Category: SN-Bright tin Plating
- ⑧Color: RE-Red ; RD-Purplish red

SPECIFICATIONS

- Voltage rating:500V AC/DC
- Current rating:1A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ
- After environment testing:≤30mΩ

Poles	Dimensions(mm)	Poles	Dimensions(mm)
	A		A
4	2.54	16	17.78
6	5.08	18	20.32
8	7.62	20	22.86
10	10.16	22	25.40
12	12.70	24	27.94
14	15.24	26	30.48

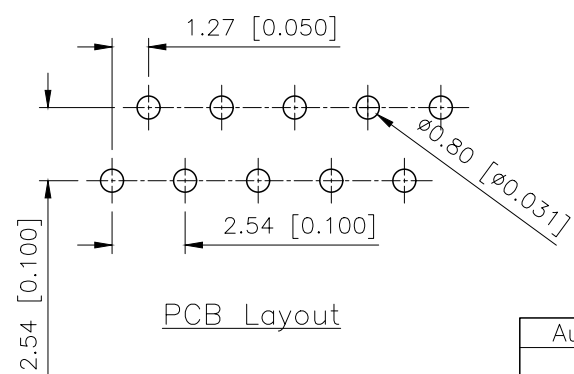

X9127WV-XXA4-PTSNRE	Red	PBT UL 94V-0	Brass	Tin-Plated
X9127WV-XXA4-9TSNRD	purplish red	PA9T UL 94V-0		
X9127WV-XXA4-9TSNRE	Red	PA9T UL 94V-0		
PART NO	Color	Material	Material(Pin)	Finish(Pin)

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	1.27mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X9127WV-XXA4-XXSNXX
APPROVED		SIZE:	A4	DWG NO.:	