
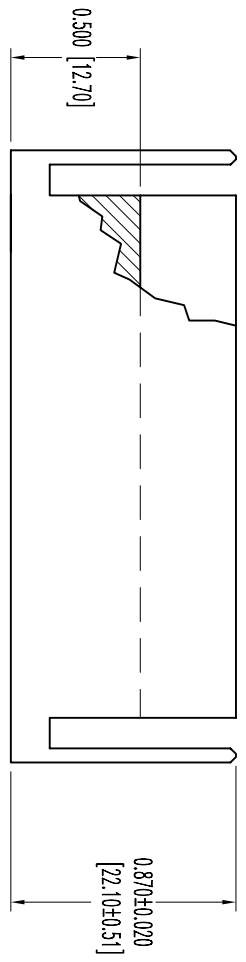




POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND POSITRONIC INDUSTRIES ASSUMES NO LIABILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
9-28-05	NC	ECO 247747		YK	

SK6614

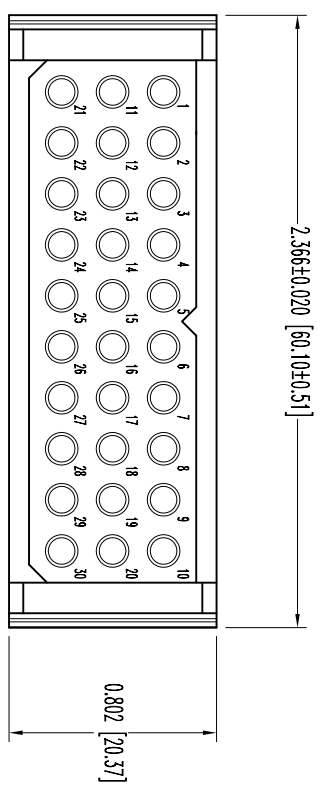

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0, BLUE COLOR.
 2. ELECTRICAL CHARACTERISTICS:
INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
WORKING VOLTAGE: 600 VAC.
 3. WORKING TEMPERATURE: -55°C TO +125°C.
 4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
 5. DIMENSIONS ARE IN INCHES [MILLIMETERS].

 <p>POSITRONIC INDUSTRIES INC. www.connectpositronic.com</p>		<p>DATE: 9-28-05</p>		<p>DRAWING NUMBER: SK6614</p>	
<p>DECIMAL TOL. ±0.015 [0.38]</p>		<p>SCALE: N.T.S.</p>		<p>REV: NC</p>	
<p>TITLE: PCS SPRINGS</p>		<p>DRAWN BY: YK</p>		<p>PLC30M0000/AA</p>	
<p>ANGULAR TOL. ±5°</p>		<p>APPROVED BY:</p>		<p>PLC30M0000/AA</p>	