



■ Features :

- Universal AC input / Full range
- Built-in active PFC function
- High efficiency up to 94%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- * OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- ullet Type "HL" for use in class $\,\mathrm{I}$, Division 2 hazardous(Classified) location luminaires
- 7 years warranty (Note.10)





HLG-120-12 A Blank: IP67 rated. Cable for I/O connection.

- A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.
- D (option, safety pending): IP67 rated. Timer dimming function, contact MEAN WELL for details.


SPECIFICATION

							0 400 00	0 400 40					
MODEL		HLG-120-12	HLG-120-15	HLG-120-20	HLG-120-24	HLG-120-30	HLG-120-36	HLG-120-42	HLG-120-48	HLG-120-54			
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V			
	CONSTANT CURRENT REGION Note.4	6 ~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V			
	RATED CURRENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A			
	RATED POWER	120W	120W	120W	120W	120W	122.4W	121.8W	120W	124.2W			
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p			
	VOLTAGE ADJ. RANGE Note.6	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V			
OUTPUT	OURDENT AR L RANGE	Can be adjusted by internal potentiometer A type only											
	CURRENT ADJ. RANGE	5 ~ 10A	4 ~ 8A	3 ~ 6A	2.5 ~ 5A	2~4A	1.7 ~ 3.4A	1.4 ~ 2.9A	1.2 ~ 2.5A	1.1 ~ 2.3A			
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION	±2.0%	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	SETUP, RISE TIME Note.8	1200ms,50ms	115VAC 50	00ms,50ms/23	0VAC at full loa	ad; B type 120	0ms,200ms/11	5VAC 500m:	s,200ms/230V	AC at 95% lo			
	HOLD UP TIME (Typ.)	16ms at full load 230VAC / 115VAC											
		90 ~ 264VAC	127 ~ 370	OVDC									
	FREQUENCY RANGE	47 ~ 63Hz											
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC (Please refer to "Power Factor Characteristic" curve)											
INPUT	EFFICIENCY (Typ.)	92%	92%	93.5%	94%	94%	94%	94%	94%	94%			
	AC CURRENT (Typ.)	1.4A / 115VA			0.70		0.70						
	INRUSH CURRENT (Typ.)	COLD START 60A(twidth=375 µs measured at 50% Ipeak) at 230VAC											
	LEAKAGE CURRENT	<0.75mA / 24	<u> </u>	,	,,,,,								
		95 ~ 108%											
	OVER CURRENT	Protection type: Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed											
PROTECTION	SHOKT CIRCUIT	14 ~ 17V	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 63V	59 ~ 65V			
	OVER VOLTAGE								01 001	00 001			
	OVER TEMPERATURE	Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery Shut down o/p voltage, recovers automatically after temperature goes down											
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")											
		20 ~ 95% RH non-condensing											
ENVIRONMENT	WORKING HUMIDITY STORAGE TEMP., HUMIDITY	· · · · · · · · · · · · · · · · · · ·											
ENVIRONMENT	TEMP. COEFFICIENT	-40 ~ +80°C, 10 ~ 95% RH ±0.03%/°C (0 ~ 50°C)											
	VIBRATION			l	·O	V V 7							
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes										
	SAFETY STANDARDS Note.7	UL8750(type"HL"), CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent IP65 or IP67, J61347-1, J61347-2-13 approved design refer to UL60950-1, TUV EN60950-1											
045577.0	WITHOUTH NO. TA OF		-										
SAFETY &	WITHSTAND VOLTAGE				/P-FG:1.5KVA								
EMC	ISOLATION RESISTANCE				0VDC / 25°C/			=					
	EMC EMISSION	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥50% load) ; EN61000-3-3											
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A											
	MTBF	192.2K hrs mi		3K-217F (25°C))								
OTHERS	DIMENSION	220*68*38.8n	,	ıcı									
	PACKING		s/14.4Kg/0.8CI		1		add and a						
NOTE	Ripple & noise are measure Tolerance : includes set up Please refer to "DRIVING N Derating may be needed ur A type only. Safety and EMC design reference.	lly mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. ed at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. tolerance, line regulation and load regulation. METHODS OF LED MODULE". rider low input voltages. Please check the static characteristics for more details. er to EN60598-1, CNS15233, GB7000.1, FCC part18. assured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.											


- 8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.

 9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the
- complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 10. Refer to warranty statement.
- 11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently



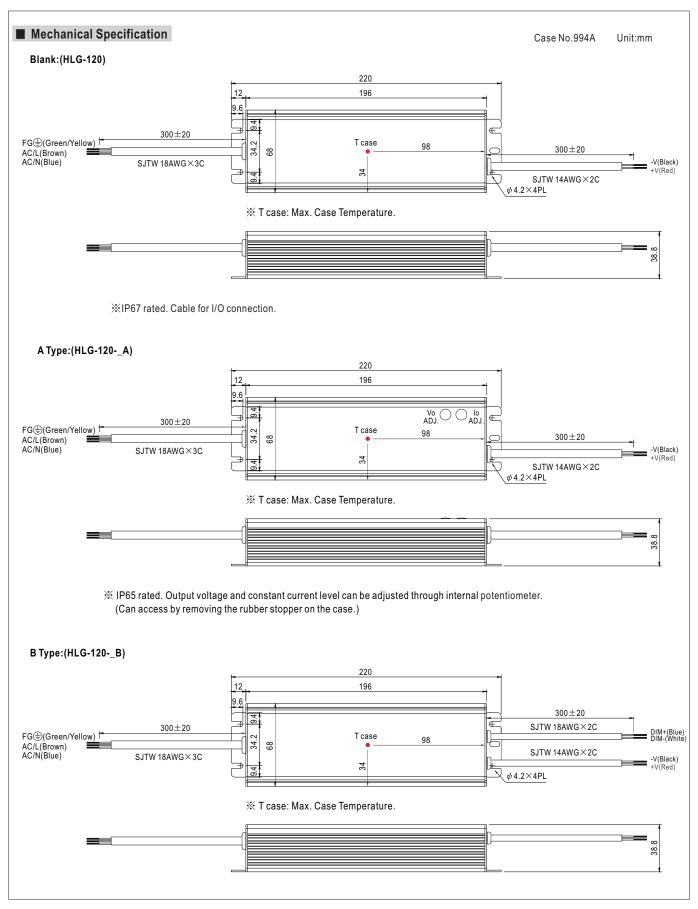




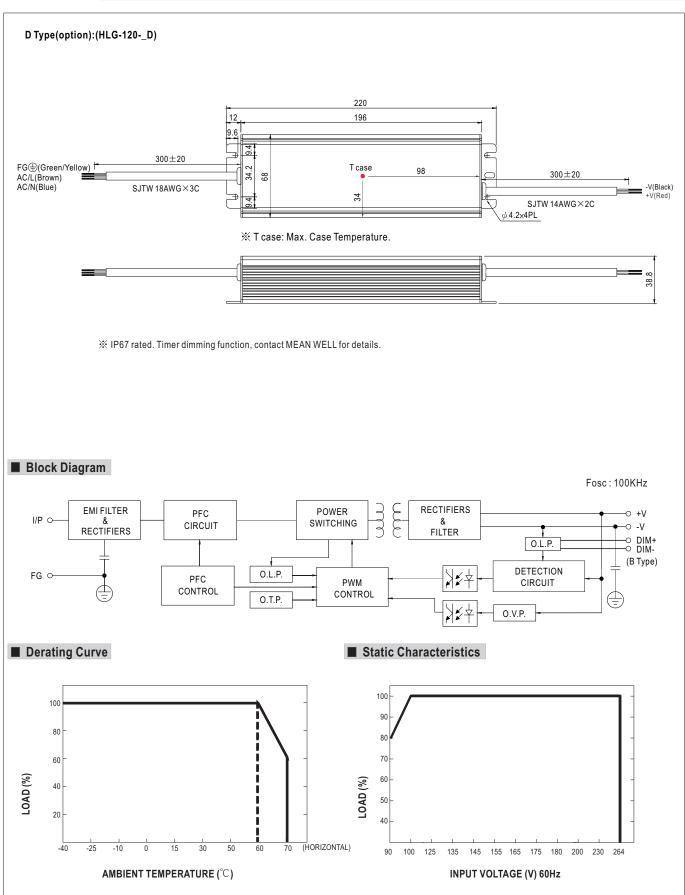




■ Power Factor Characteristic

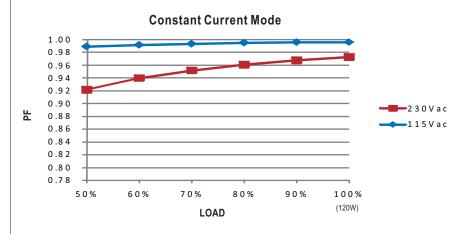

■ EFFICIENCY vs LOAD (48V Model)

HLG-120 series possess superior working efficiency that up to 94% can be reached in field applications.

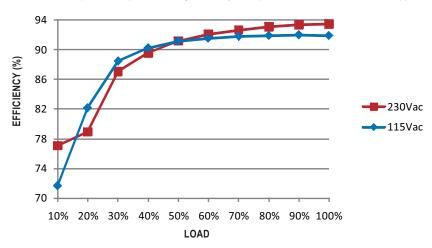


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).



Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



■ DIMMING OPERATION (for B-type only)



- Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- ※ Please DO NOT connect "DIM-" to "-V".
- * Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	10K Ω	20ΚΩ	30K Ω	40K Ω	50K Ω	60KΩ	70K Ω	80KΩ	90K Ω	100K Ω	OPEN
	Multiple drivers (N=driver quantity for synchronized dimming operation)	10K Ω /N	20K Ω /N	30K Ω /N	40K Ω/N	50K Ω/N	60K Ω /N	70K Ω /N	80K Ω /N	90K Ω /N	100K Ω /N	
Percentage	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

※ 1 ~ 10V dimming function for output current adjustment (Typical)


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

* 10V PWM signal for output current adjustment (Typical): Frequency range: 100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

- **Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- *Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF:

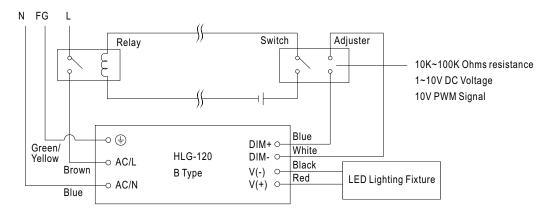

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.


File Name:HLG-120-SPEC 2015-07-22



■ WATERPROOF CONNECTION


O Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-120 to operate in dry/wet/damp or outdoor environment.




Size	Pin Configuration (Female)					
M12	000	000				
IVIIZ	4-PIN	5-PIN				
	5A/PIN	5A/PIN				
Order No.	M12-04	M12-05				
Suitable Current	10A max.	10A max.				

Size	Pin Configuration (Female)					
M15	00					
MID	2-PIN					
	12A/PIN					
Order No.	M15-02					
Suitable Current	12A max.					




O Cable Joiner

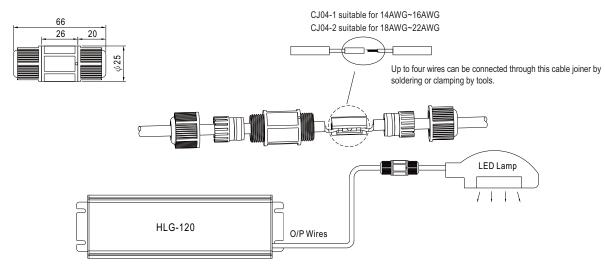

«CJ04 cable joiner can be purchased independently for user's own assembly.

MEAN WELL order No.: CJ04-1, CJ04-2.

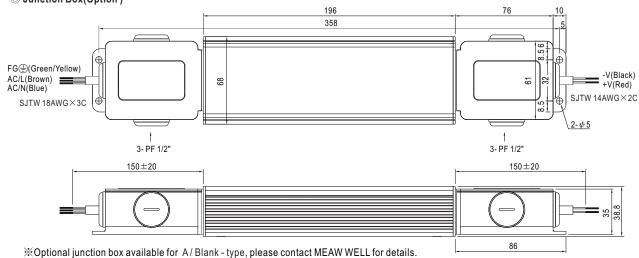

File Name:HLG-120-SPEC 2015-07-22