

### Features

- General Purpose, Low Cost
- Gain Bandwidth Product: 300KHz
- Low Quiescent Current: 21 $\mu$ A/Amplifier
- 0.01Hz-10Hz Noise: 1.5 $\mu$ V<sub>PP</sub>
- Zero Drift: 0.01 $\mu$ V/°C (Typ)
- Input Bias Current: 20pA
- Unity Gain Stable
- Rail-to-Rail Input and Output
- Single or Dual Supply Operation
- Supply Voltage Range: 1.8V to 5.5V
- Operating Temperature: -50°C ~ +125°C
- Type Package:SOP-8


### Applications

- Temperature Sensors
- Battery-Powered Instruments
- Smoke/Gas/Environment Sensors
- Medical Equipment
- Portable Instruments and Mobile Device
- Active Filters
- Piezo Electrical Transducer Amplifier
- Sensor Interface
- Handheld Test Equipment

### General Description

The OPA2317 of CMOS operational amplifiers use a proprietary auto-calibration technique to simultaneously provide very low offset voltage ( $\pm 10\mu$ V, maximum) and near-zero drift over time and temperature. These miniature, high-precision, low quiescent current (21 $\mu$ A) amplifiers offer high impedance inputs that have a common-mode range 100 mV beyond the rails, and rail-to-rail output that swings within 50 mV of the rails. Single or dual supplies as low as 1.8 V ( $\pm 0.9$  V) and up to 5.5 V (+2.75 V) can be used. These devices are optimized for low voltage, single-supply operation.

### Pinout (top view)

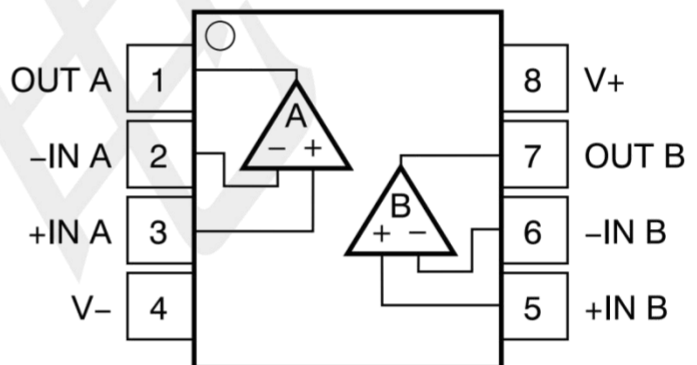


### Pin Configurations

| Pin Number | Pin Name | Pin Function                      |
|------------|----------|-----------------------------------|
| 1          | OUT A    | Output A                          |
| 2          | -IN A    | Reverse input A                   |
| 3          | +IN A    | In-phase input A                  |
| 4          | -V       | Chip Supply Voltage(Negative)/GND |
| 5          | +IN B    | In-phase input B                  |
| 6          | -IN B    | Reverse input B                   |
| 7          | OUT B    | Output B                          |
| 8          | +V       | Chip Supply Voltage(Positive)/VDD |


**Absolute Maximum Ratings** (@TA = +25°C, unless otherwise specified.)

| Condition  |                                       | Rating            | UNIT |
|------------|---------------------------------------|-------------------|------|
| VDD to GND | Power Supply Voltage                  | 7V                | V    |
| IN+ or IN- | Signal Input Terminals Voltage        | GND-0.3V~VDD+0.3V | V    |
| IN+ or IN- | Signal Input Terminals Current        | -1mA ~ +1mA       | mA   |
| OUT to GND | Output Short-Circuit                  | Continuous        | mA   |
| TJ         | Junction Temperature                  | 150               | °C   |
| LT         | Lead Temperature (Soldering, 10 sec.) | 260               | °C   |
| TA         | Operating Temperature Range           | -55      150      | °C   |
| Tstg       | Storage Temperature Range             | -65      150      | °C   |
| V(ESD)     | Human body model (HBM)                | ±4000             | V    |
| V(ESD)     | Charged-device model (CDM)            | ±1000             | V    |

**BLOCK DIAGRAM**

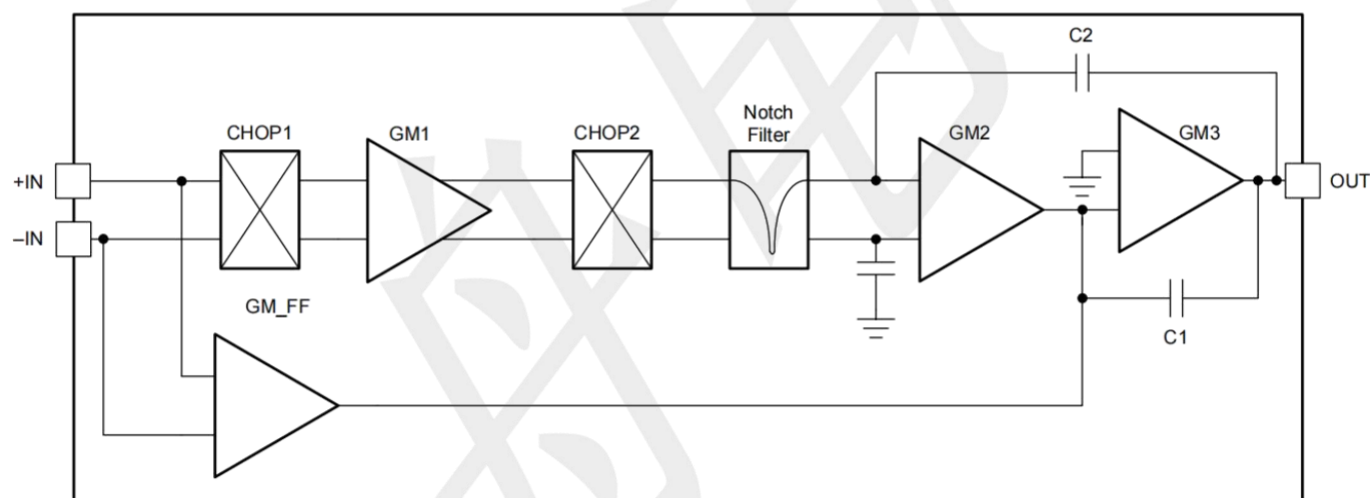

**Power Supply Bypassing**

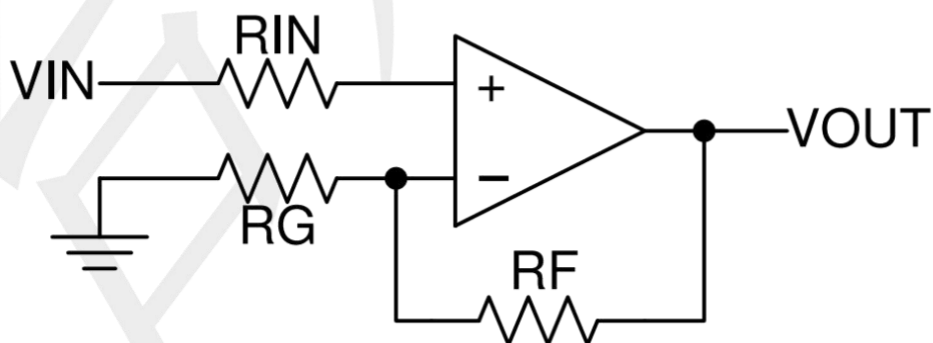

### Electrical Characteristics


(At  $T_A = +25^\circ\text{C}$ ,  $V_S = +5\text{V}$ ,  $V_{IN} = 0\text{V}$ , unless otherwise noted.)

| PARAMETER                       | SYMBOL            | TEST Conditions                                  | MIN       | TYP     | MAX          | UNIT                         |
|---------------------------------|-------------------|--------------------------------------------------|-----------|---------|--------------|------------------------------|
| Supply-Voltage Range            | $V_{DD}$          | Single-supply                                    | 1.8       | --      | 5.5          | V                            |
|                                 |                   | Dual-supply                                      | $\pm 0.9$ | --      | $\pm 2.75$   | V                            |
| Quiescent Current/Amplifier     | $I_Q$             | $V_{DD} = 5\text{V}$                             | --        | 21      | 35           | $\mu\text{A}$                |
| Input Offset Voltage            | $V_{OS}$          |                                                  | --        | $\pm 8$ | $\pm 50$     | $\mu\text{V}$                |
| Input Offset Voltage Tempco     | $dV_{OS}/dT$      | $T_A = -55^\circ\text{C}$ to $125^\circ\text{C}$ | --        | 0.01    | --           | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current              | $I_B$             | ( 2 )                                            | --        | 1       | 20           | PA                           |
| Input Bias Current              | $I_B$             | $T_A = -55^\circ\text{C}$ to $125^\circ\text{C}$ | --        | --      | 180          | PA                           |
| Input Offset Current            | $I_{OS}$          | ( 2 )                                            | --        | 1       | 20           | PA                           |
| Common-Mode Voltage Range       | $V_{CM}$          |                                                  | GND-0.1   | --      | $V_{DD}+0.1$ | V                            |
| Common-Mode Rejection Ratio     | CMRR              | $\Delta V_{IN}=1\text{V}$                        | 130       | 135     | --           | dB                           |
| Power-Supply Rejection Ratio    | PSRR              | $\Delta V_S=1\text{V}$                           | --        | 135     | --           | dB                           |
| Open-Loop Voltage Gain          | $A_V$             | $\Delta V_{OUT}=1\text{V}$                       | 140       | 150     | --           | dB                           |
| Output Swing from Positive Rail | $V_{OUT - SWING}$ | $R_L=10\text{k}\Omega$                           | --        | 13      | --           | mV                           |
| Output Swing from Negative Rail |                   | $R_L=10\text{k}\Omega$                           | --        | 17      | --           | mV                           |
| Capacitive Load Drive           | $C_{L(3)}$        | $G = +1$ , $V_{IN}=4\text{V}$ Step               | --        | --      | 1            | nF                           |
| Output Short-Circuit Current    | $I_{SC}$          | Sinking or Sourcing                              | --        | 21      | --           | mA                           |
| Gain Bandwidth Product          | GBW               |                                                  | --        | 300     | --           | KHz                          |
| Slew Rate                       | SR                | $G = +1$ , $V_{IN}=4\text{V}$ Step               | --        | 0.1     | --           | $\text{V}/\mu\text{s}$       |
| Input Voltage Noise             | $V_N$             | $f=0.1\text{Hz}$ to $10\text{Hz}$                | --        | 2       | --           | $\mu\text{V}_{PP}$           |
| Input Voltage Noise PSD         |                   | $f=1\text{kHz}$                                  | --        | 45      | --           | $\text{nV}/\sqrt{\text{Hz}}$ |
| Specified temperature           |                   |                                                  | -50       | --      | 125          | $^\circ\text{C}$             |


#### Notes:

- 1: All devices are 100% production tested at  $T_A = +25^\circ\text{C}$ ; range is guaranteed by design, not production tested.
- 2: Parameter is guaranteed by design.
- 3: Capacitive load drive means that above a given maximum value, the output waveform will oscillate under the step response.

### Typical Application Circuit

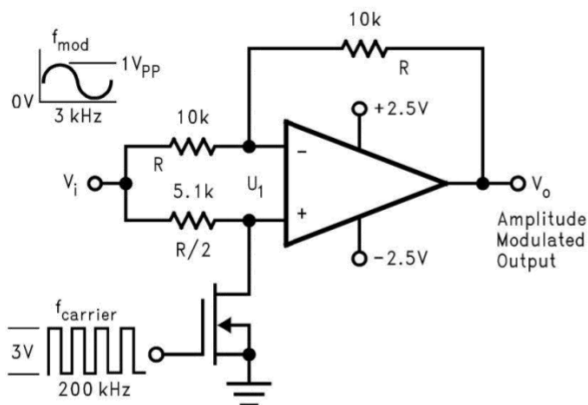


Amplitude modulator circuit

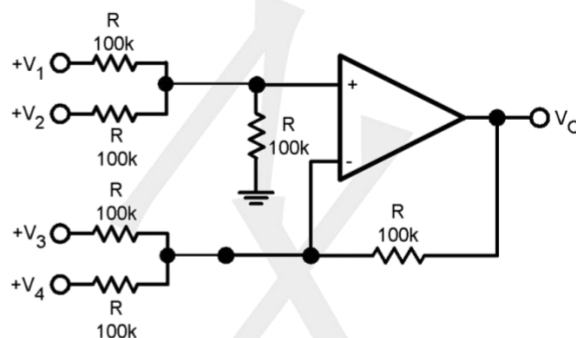


Note:  $V_O = V_1 + V_2 - V_3 - V_4, (V_1 + V_2) \geq (V_3 + V_4)$  for  $V_O \geq 0V_{DC}$


DC adder amplifier  
( $V_{IN'S} \geq 0V_{DC}, V_O \geq V_{DC}$ )

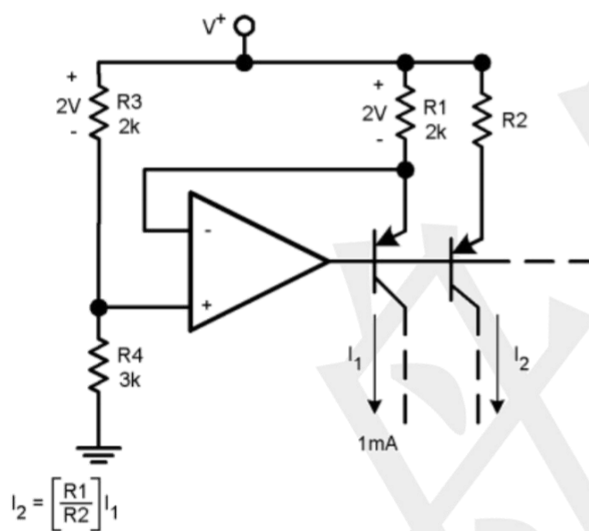


Fixed current source

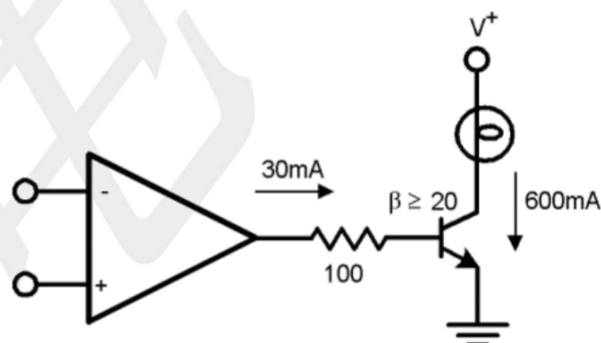


Lamp Driver

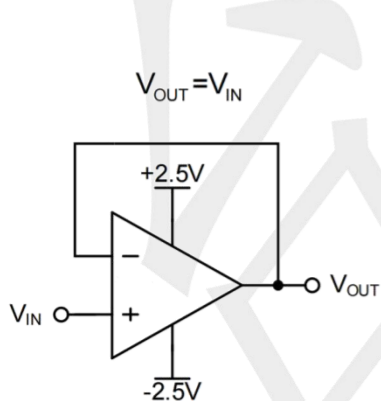

Voltage Follower

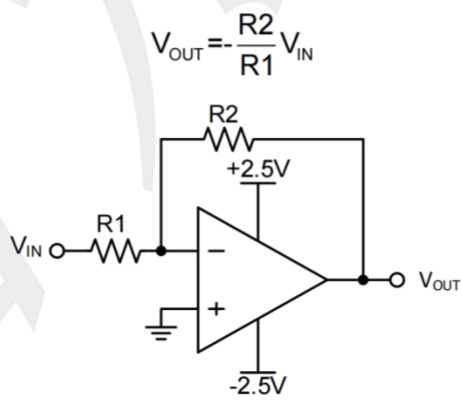


Inverting Proportional Amplifier

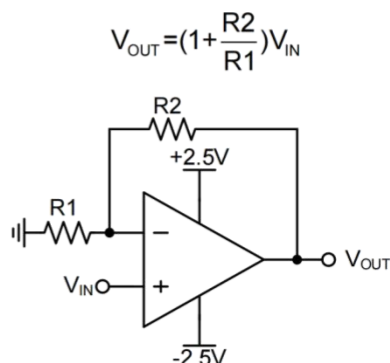


Noninverting Proportional Amplifier


**Typical Performance Characteristics** (@TA = +25°C, unless otherwise specified.)

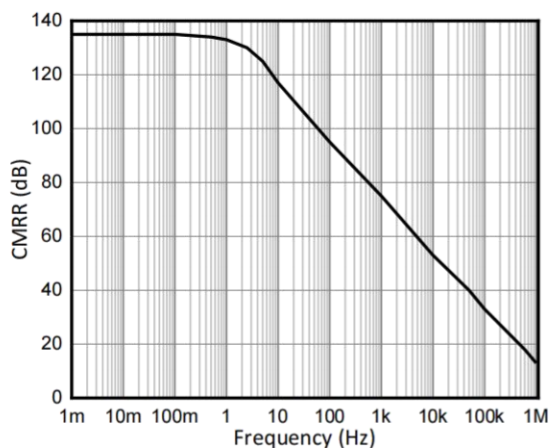


**CMRR vs Frequency**

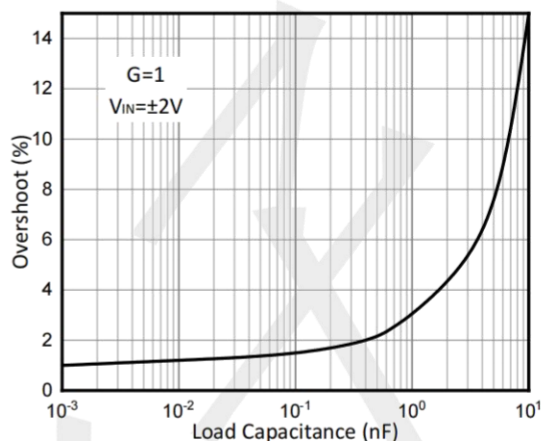


**Large-Signal Overshoot vs Load Capacitance**

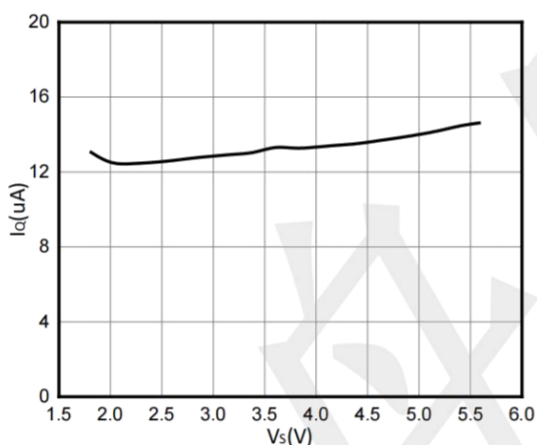


**Quiescent Current vs Supply Voltage**

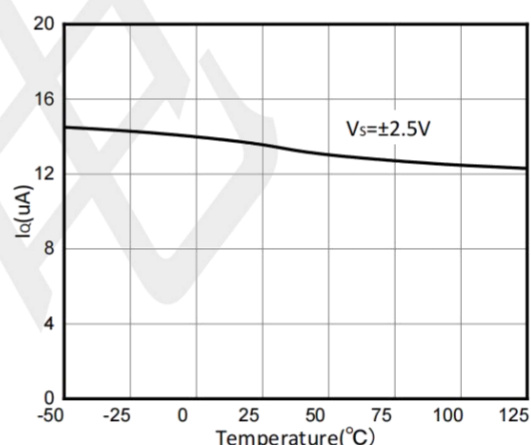

**Quiescent Current vs Temperature**

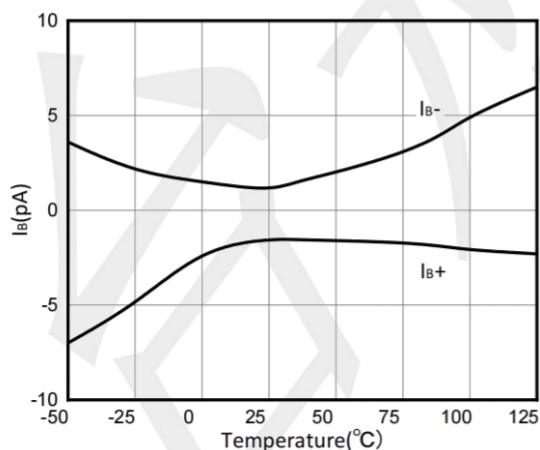


**Input Bias Current vs Temperature**

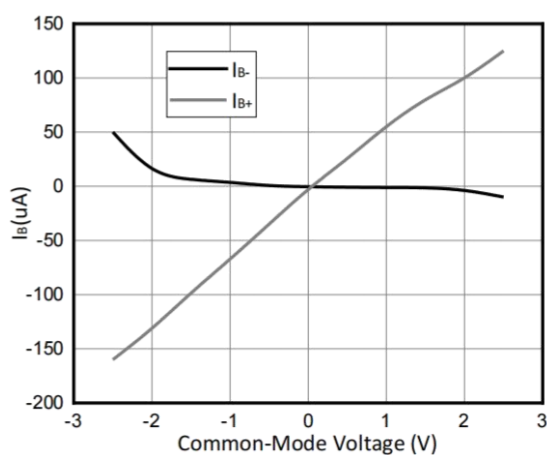

**Input Bias Current vs Common-Mode Voltage**

## Package information

### SOP-8

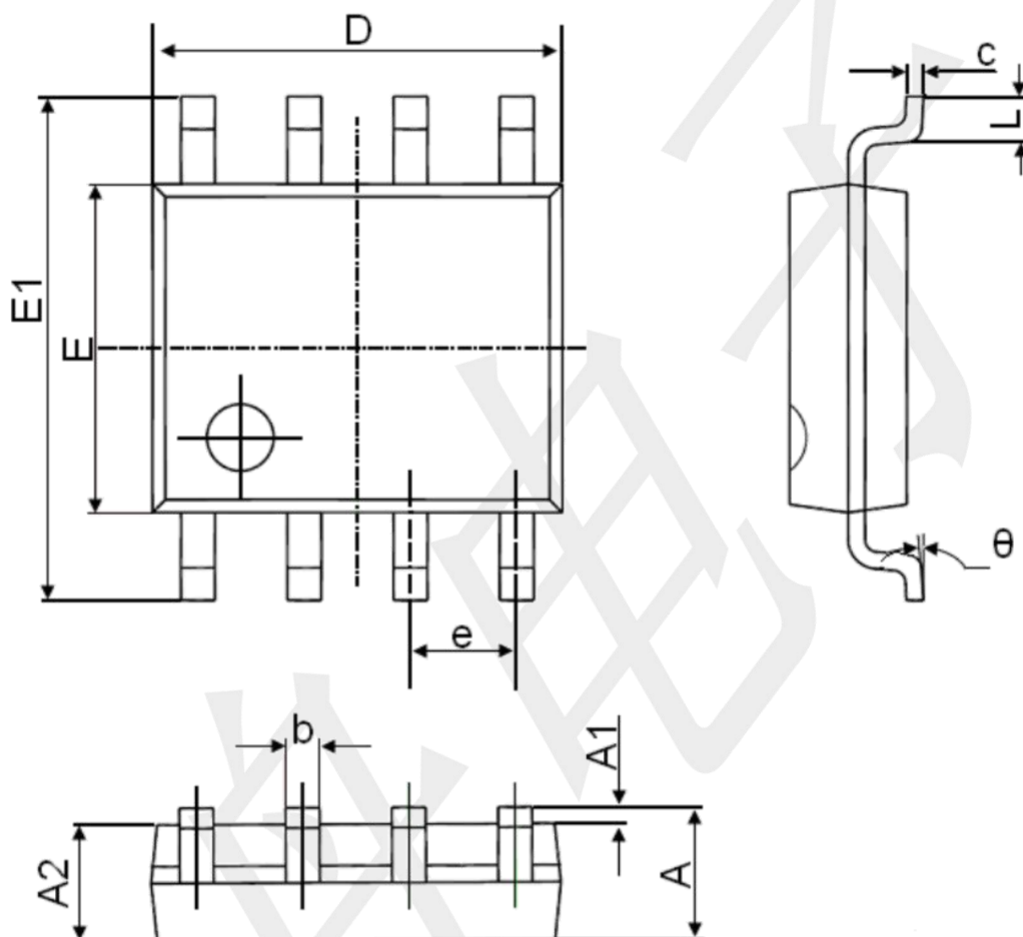

| Symbol   | Dimensions In Millimeters |       | Dimensions In Inches |       |
|----------|---------------------------|-------|----------------------|-------|
|          | Min.                      | Max.  | Min.                 | Max.  |
| A        | 1.350                     | 1.750 | 0.053                | 0.069 |
| A1       | 0.100                     | 0.250 | 0.004                | 0.010 |
| A2       | 1.350                     | 1.550 | 0.053                | 0.061 |
| b        | 0.330                     | 0.510 | 0.013                | 0.020 |
| c        | 0.170                     | 0.250 | 0.006                | 0.010 |
| D        | 4.700                     | 5.100 | 0.185                | 0.200 |
| E        | 3.800                     | 4.000 | 0.150                | 0.157 |
| E1       | 5.800                     | 6.200 | 0.228                | 0.244 |
| e        | 1.270(BSC)                |       | 0.050(BSC)           |       |
| L        | 0.400                     | 1.270 | 0.016                | 0.050 |
| $\theta$ | 0°                        | 8°    | 0°                   | 8°    |