


Recommended PCB Layout

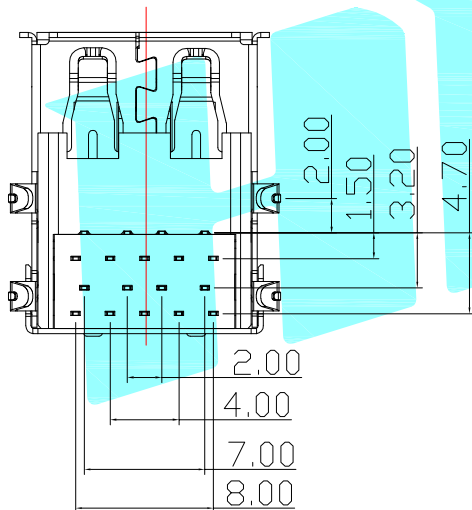

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating  
1.0A/contact terminal
- 额定电压: Voltage Rating  
30V DC
- 接触电阻: Contact Resistance  
30 milliohms MAX
- 耐压: Dielectric Withstanding Voltage:  
300 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:  
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force  
Mate force: 3.0kgf(MAX)  
Unmate force: 0.7kgf(MIN)
- 端子保持力: Terminal Retention  
1.2kgf(MIN)

PART NO	Shell
U-F-39DD-Y-1	Copper Alloy
U-F-39DD-Y-2	SPCC

③	Housing	—	1	NYLON	—	—
②	Terminal	—	8	Copper Alloy	Ni Plated	—
①	Shell	—	1	SPCC/Copper Alloy	Sn Plated	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE		HRO 翰豪® ELECTRONICS CO.,LTD		
DRAWN	LIUCAN	2021.12.14		TITLE:	USB CONNECTOR	
CHECKED				PART NO.		
APPROVALS				UNIT: mm	SCALE: 1:1	PROJ:
TOLERANCES ARE		30~以上 10~30 5~10 ~ 5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE	±2'	DRAWING NO.
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.