



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSTTRONIC AND ITS SUBSIDIARIES. POSTTRONIC RELEASES TECHNICAL INFORMATION TO OTHERS ONLY BY WRITTEN AGREEMENT. THE INFORMATION IS TO BE USED ONLY FOR THE PROJECT AND FOR WHICH IT WAS PROVIDED. POSTTRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF THIS INFORMATION IN ANY MANNER.

SK11888

DATE	REV	REVISION/RECORD	APP	DR	CHK
11-1	A	ECO 33240	COLR	BS	COLR

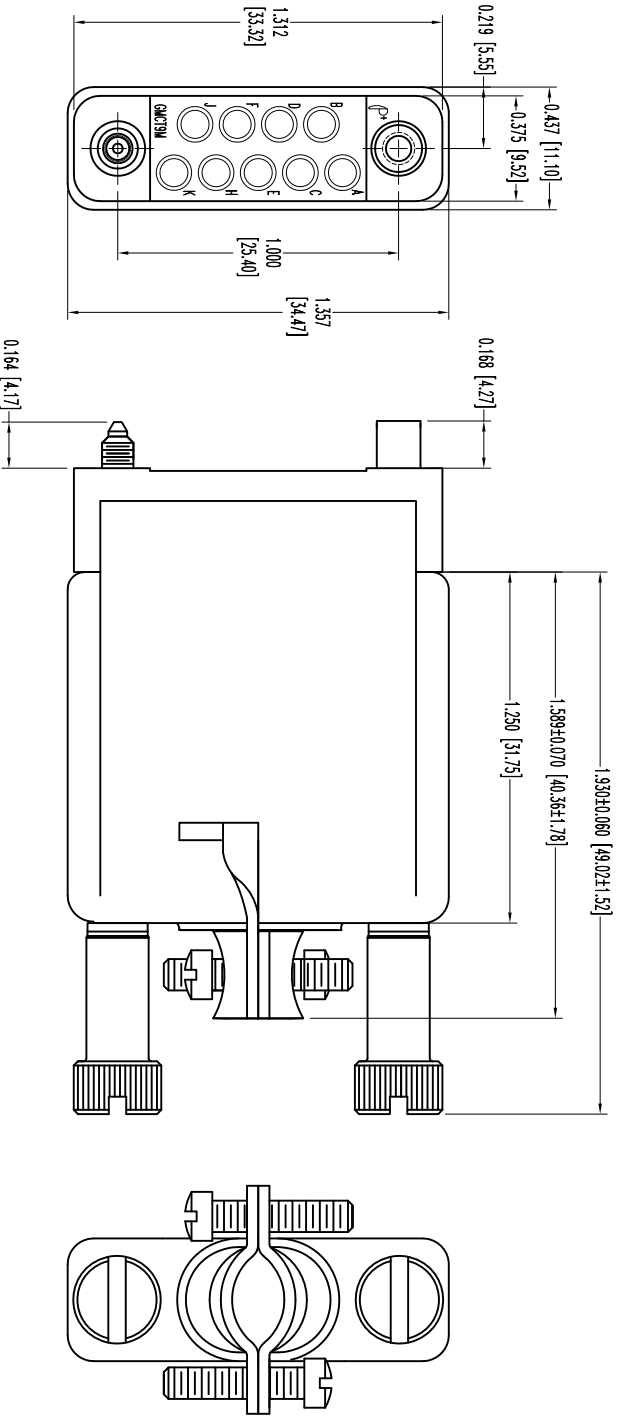

- NOTES:
1. MATERIALS AND FINISHES:  
INSULATOR: GLASS FILLED DAP PER ASTM-D5948, TYPE 506-F, COLOR: GREY.  
JACKSCREWS: STAINLESS STEEL, PASSIVATED.  
HOOD, CABLE CLAMPS, SLEEVES AND KNOBS: ALUMINUM WITH YELLOW ANODIZE.
  2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY RECTANGULAR PRODUCT PUBLICATION. VISIT [CONNECTPOSTTRONIC.COM/PRODUCTS/53/STANDARDRECTANGULARORCONNECTPOSTTRONIC.COM](http://CONNECTPOSTTRONIC.COM/PRODUCTS/53/STANDARDRECTANGULARORCONNECTPOSTTRONIC.COM).
  3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

 <p><b>POSTTRONIC INDUSTRIES, INC.</b> www.connectposttronic.com</p>		SCALE		DRAWN BY		PSCN 28198	
		N.P.S.		B. SHERIDAN			
DECIMAL TOL.		TITLE		DRAWING NUMBER		REV.	
± 0.015 [0.38]		GMCT SERIES		GMCT9M0E10010		NC	
ANGULAR TOL.		DATE		DRAWING NUMBER			
± 3°		11-1-10		SK11888			