




P-Channel 55-V (D-S), 175°C MOSFET

PRODUCT SUMMARY

$V_{(BR)DSS}$ (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-55	0.008	-75 ^a

TO-220AB




G D S

Top View

SUP75P05-08

DRAIN connected to TAB

TO-263

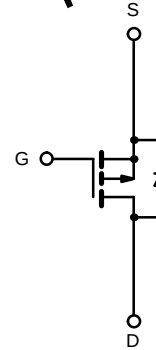


G D S

Top View

SUB75P05-08

175°C Rated
Maximum Junction Temperature
TrenchFET®
Power MOSFETs



P-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter		Symbol	Limit	Unit
Drain-Source Voltage		V_{DS}	-55	V
Gate-Source Voltage		V_{GS}	± 20	
Continuous Drain Current ($T_J = 175^\circ\text{C}$)	$T_C = 25^\circ\text{C}$	I_D	-75 ^a	A
	$T_C = 150^\circ\text{C}$		-47	
Pulsed Drain Current		I_{DM}	-240	
Avalanche Current		I_{AR}	-75	
Repetitive Avalanche Energy ^b		E_{AR}	280	mJ
Power Dissipation	$T_C = 25^\circ\text{C}$ (TO-220AB and TO-263)		250 ^d	
	$T_A = 125^\circ\text{C}$ (TO-263) ^c		3.7	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 175	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS

Parameter		Symbol	Limit	Unit
Junction-to-Ambient	PCB Mount (TO-263) ^c	R_{thJA}	40	$^\circ\text{C/W}$
	Free Air (TO-220AB)	R_{thJA}	62.5	
Junction-to-Case		R_{thJC}	0.6	

Notes:

- a. Package limited.
- b. Duty cycle $\leq 1\%$.
- c. When mounted on 1" square PCB (FR-4 material).
- d. See SOA curve for voltage derating.

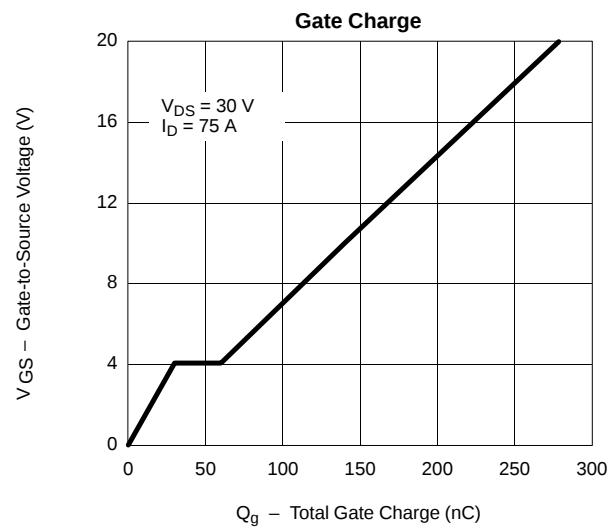
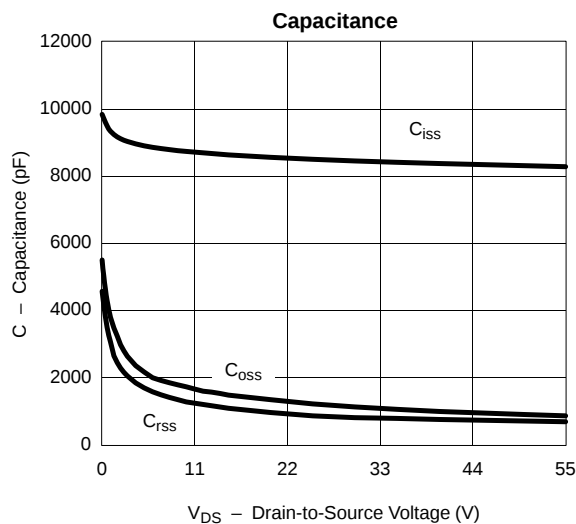
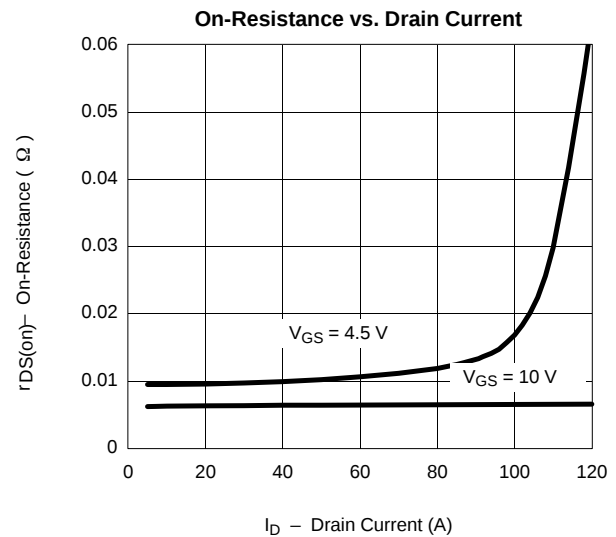
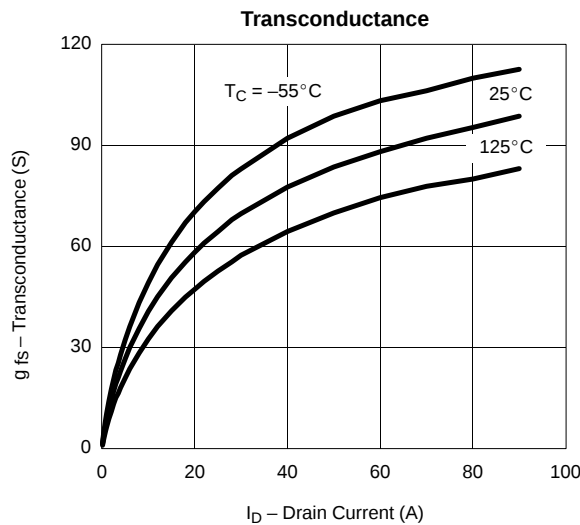
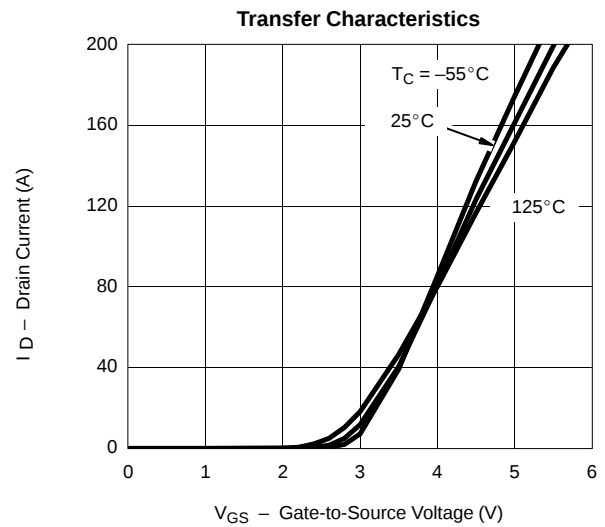
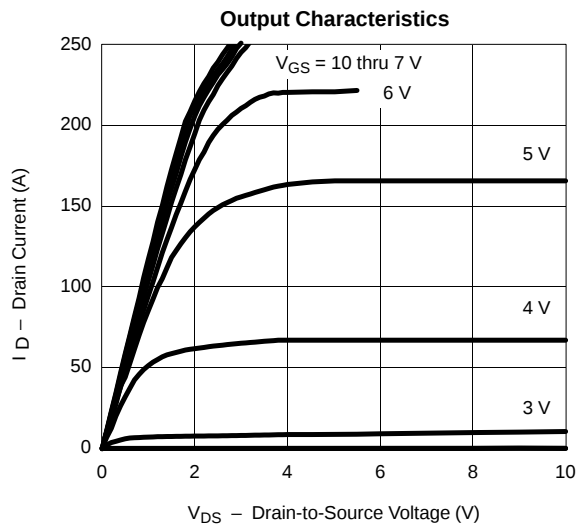
For SPICE model information via the Worldwide Web: <http://www.vishay.com/www/product/spice.htm>

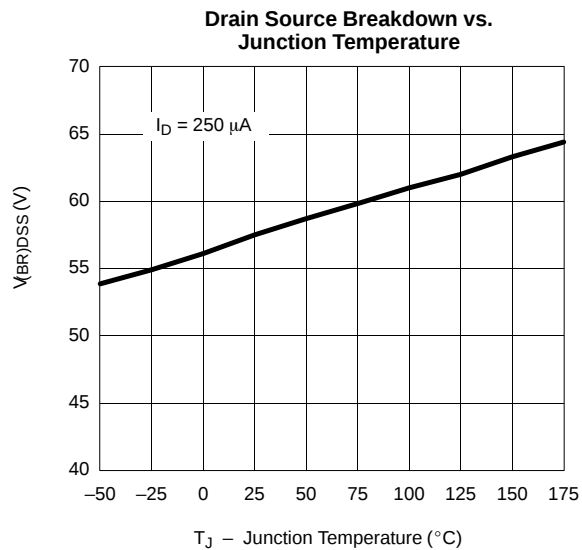
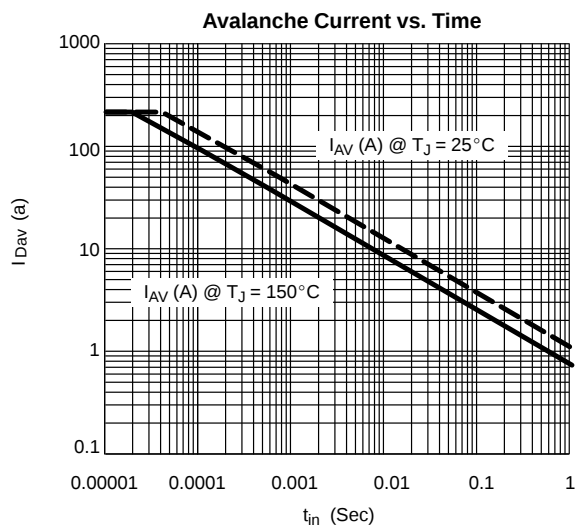
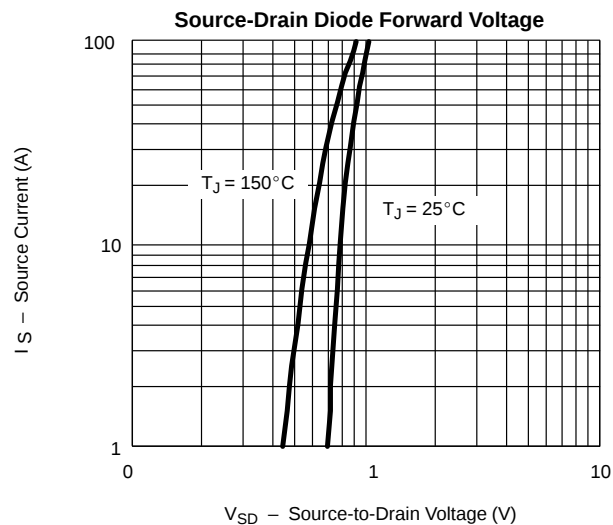
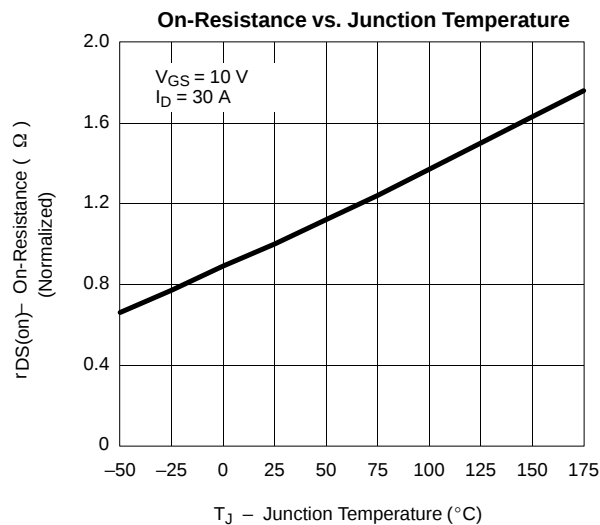
**SPECIFICATIONS (T_J = 25 °C UNLESS OTHERWISE NOTED)**

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = −250 μA	−55			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = −250 μA	−1	−2	−3	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = −44 V, V _{GS} = 0 V			−1	μA
		V _{DS} = −44 V, V _{GS} = 0 V, T _J = 125°C			−50	
		V _{DS} = −44 V, V _{GS} = 0 V, T _J = 175°C			−700	
On-State Drain Current ^a	I _{D(on)}	V _{DS} = −5 V, V _{GS} = −10 V	−120			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = −10 V, I _D = −30 A			0.008	Ω
		V _{GS} = −4.5 V, I _D = −20 A			0.013	
		V _{GS} = −10 V, I _D = −30 A, T _J = 125°C			0.014	
		V _{GS} = −10 V, I _D = −30 A, T _J = 175°C			0.016	
Forward Transconductance ^a	g _{fs}	V _{DS} = −15 V, I _D = −30 A		75		S
Dynamic ^b						
Input Capacitance	C _{iss}	V _{GS} = 0 V, V _{DS} = −25 V, f = 1 MHz		8500		pF
Output Capacitance	C _{oss}			1220		
Reverse Transfer Capacitance	C _{rss}			915		
Total Gate Charge ^c	Q _g	V _{DS} = −30 V, V _{GS} = −10 V, I _D = −75 A		140	225	nC
Gate-Source Charge ^c	Q _{gs}			30		
Gate-Drain Charge ^c	Q _{gd}			30		
Turn-On Delay Time ^c	t _{d(on)}	V _{DD} = −30 V, R _L = 0.47 Ω I _D = −75 A, V _{GEN} = −10 V, R _G = 2.5 Ω		13	20	ns
Rise Time ^c	t _r			140	225	
Turn-Off Delay Time ^c	t _{d(off)}			115	185	
Fall Time ^c	t _f			175	300	
Source-Drain Diode Ratings and Characteristics (T _C = 25°C) ^b						
Continuous Current	I _S				−75	A
Pulsed Current	I _{SM}				−240	
Forward Voltage ^a	V _{SD}	I _F = −75 A, V _{GS} = 0 V		−1.1	−1.3	V
Reverse Recovery Time	t _{rr}	I _F = −75 A, di/dt = 100 A/μs		60	120	ns
Peak Reverse Recovery Current	I _{RM(REC)}			2.2	3.5	A
Reverse Recovery Charge	Q _{rr}			0.176	0.21	μC

Notes:

- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
b. Guaranteed by design, not subject to production testing.
c. Independent of operating temperature.

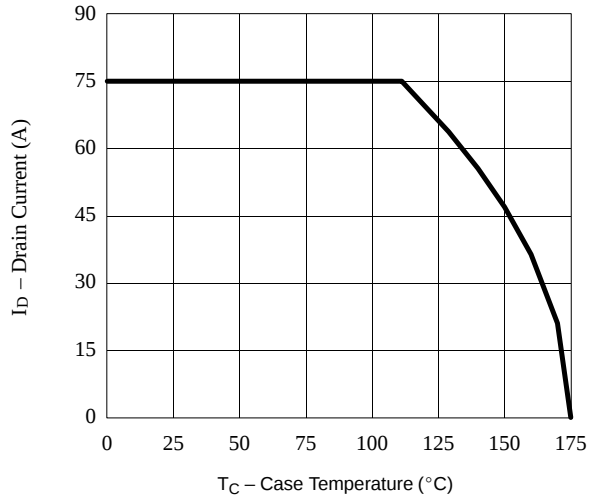
**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)


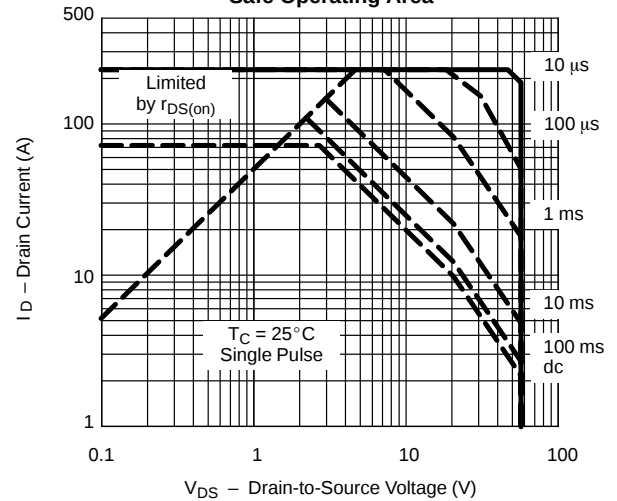


THERMAL RATINGS

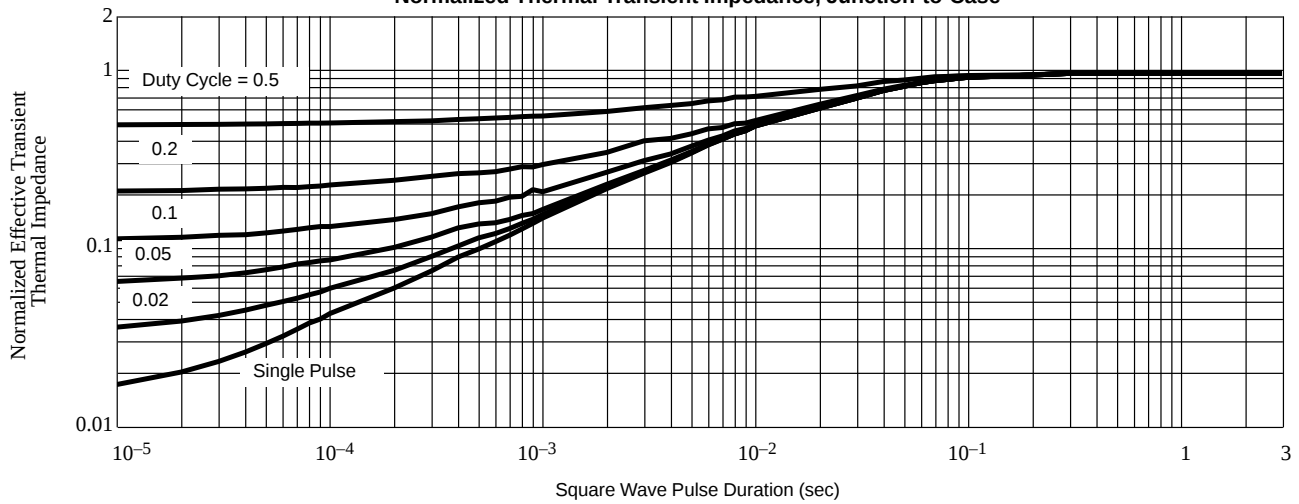
**Maximum Avalanche and Drain Current
vs. Case Temperature**



Safe Operating Area



Normalized Thermal Transient Impedance, Junction-to-Case





Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.