



Dimensions: [mm]

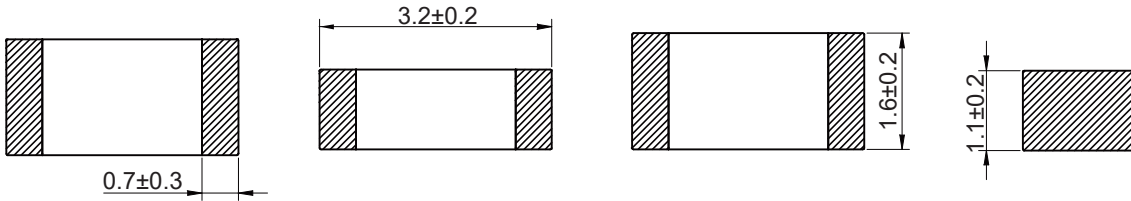

Recommended Land Pattern: [mm]

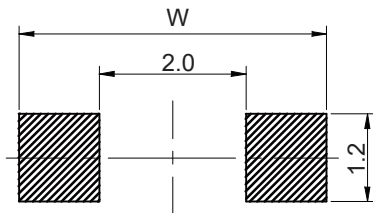


WIDE BAND / HIGH SPREED: W=4.2
 HIGH CURRENT: W=5.2

Electrical Properties:

Properties	Impedance (Ω)	I _R (mA)	R _{DC} (Ω)
Value	600.00	2000.00	0.08
Tolerance	±25%	max.	max.
Test Condition	100MHz 500mV	ΔT=40 C	


General Information:


Storage Temperature(in original packaging): -40°C to +85°C
 Operating Temperature: -55°C to +125°C
 Test conditions of Electrical Properties: 20±15°C, 30~70%RH

				UNIT: MM	 KOHER (Shanghai) Electronic Co.,Ltd
				SCALE:	
				SHEET: 1/2	
				APPROVAL: WSD	
				SIZE: A4	
				PACKING UNIT: 3000pcs	DESCRIPTION: SMD EMI Suppression Ferrite Bead
A	10-OCT-18	PDF	ZXG		PART NO: FBHA1206-601-202LR
REV	DATE	FILE	BY		

Typical Electrical Characteristics:

Impedance VS. Frequency Characteristics:

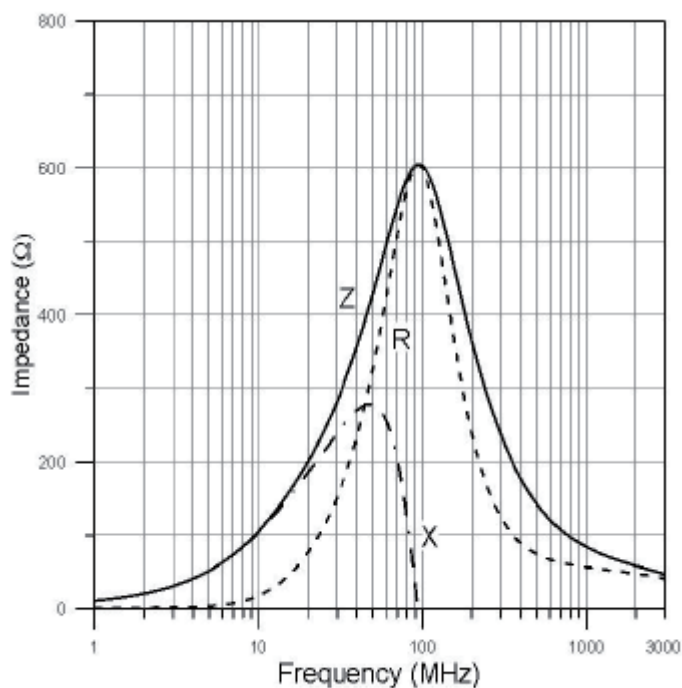

				UNIT: MM	 KOHER (Shanghai) Electronic Co.,Ltd
				SCALE:	
				SHEET: 2/2	
				APPROVAL: WSD	
				SIZE: A4	DESCRIPTION: SMD EMI Suppression Ferrite Bead
A	10-OCT-18	PDF	ZXG	PACKING UNIT: 3000pcs	PART NO: FBHA1206-601-202LR
REV	DATE	FILE	BY		