



# GBLC03C-GLC15C

## Bi-direction ESD Protection Diode

### DESCRIPTION

Designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, low capacitance, and fast response time provide best in class protection on designs that are exposed to ESD.

The combination of small size, low capacitance, and high level of ESD protection makes them a flexible solution for applications such as HDMI, Display Port TM, and MDDI interfaces. It is designed to replace multiplayer varistors (MLV) in consumer equipments applications such as mobile phone, notebook, PAD, STB, LCD TV etc.

### FEATURES

Bi-directional ESD protection of one line

Low capacitance: 1pF

Low reverse stand-off voltage: 3.3V, 5V, 8V, 12V, 15V, 24V

Low reverse clamping voltage

Low leakage current

Excellent package: 1.7mm × 1.3mm × 1.0mm

Fast response time

JESD22-A114-B ESD Rating of class 3B per human body model

IEC 61000-4-2 Level 4 ESD protection

### APPLICATIONS

Cellular phones

Audio and video equipment

Handheld-Wireless Systems


PDA's

Ethernet – 10/100/1000 Base


Portable electronics

USB Interface

Other electronics equipments communication systems

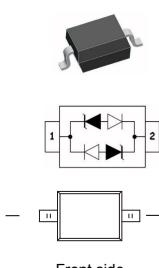

SOD323

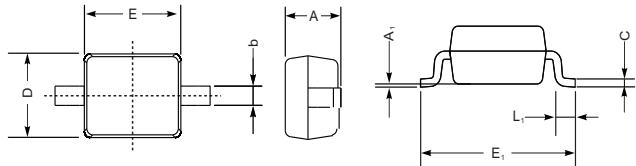

UNIT		A	C	D	E	E <sub>1</sub>	b	L <sub>1</sub>	A <sub>1</sub>
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—
mil	max	43	5.9	55	70	108	16	16	8
	min	32	3.1	47	63	100	9.8	7.9	—


### MAXIMUM RATINGS T =25°C unless otherwise noted

Symbol	Parameter	Value	Units
V <sub>ESD</sub>	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	±20 ±20	kV
P <sub>PP</sub>	Peak Pulse Power (8/20μs)	350	W
T <sub>OPT</sub>	Operating Temperature	-55/+150	°C
T <sup>STG</sup>	Storage Temperature	-55/+150	°C
T <sub>L</sub>	Lead Soldering Temperature	260	°C

# GBLC03C-GBLC15C

## ELECTRICAL PARAMETER

Symbol	Parameter
$V_C$	Clamping Voltage @ $I_{PP}$
$I_{PP}$	Peak Pulse Current
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{RWM}$	Reverse Standoff Voltage

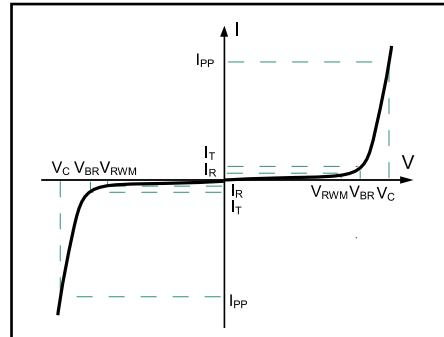

V-I characteristics for a Bi-directional TVS

## ELECTRICAL CHARACTERISTICS( $T_a=25^\circ C$ unless otherwise specified)

PART	DEVICE MARKING	$V_{RWM}$ (V) (max.)	$V_B$ (V) (min.)	$I_T$ (mA)	$V_C@1A$ (V) (max.)	$V_C$ (V) (max.)	$I_R$ ( $\mu A$ ) (max.)	C ( $pF$ ) (typ.)	
GBLC03C	CC	3.3	4.0	1	7.0	15	20	1	1
GBLC05C	AC	5.0	6.0	1	9.8	20	20	1	1
GBLC08C	BC	8.0	8.5	1	13.4	25	15	1	1
GBLC12C	DC	12.0	13.3	1	19.0	30	12	1	1
GBLC15C	EC	15.0	16.7	1	24.0	40	10	1	1

## ESD standards compliance


### IEC61000-4-2 Standard

Contact Discharge		Air Discharge	
Level	Test Voltage kV	Level	Test Voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15


### JESD22-A114-B Standard

ESD Class	Human Body Discharge V
0	0~249
1A	250~499
1B	500~999
1C	1000~1999
2	2000~3999
3A	4000~7999
3B	8000~15999


## RATING AND CHARACTERISTIC CURVES (GBLC03C-GBLC15C)

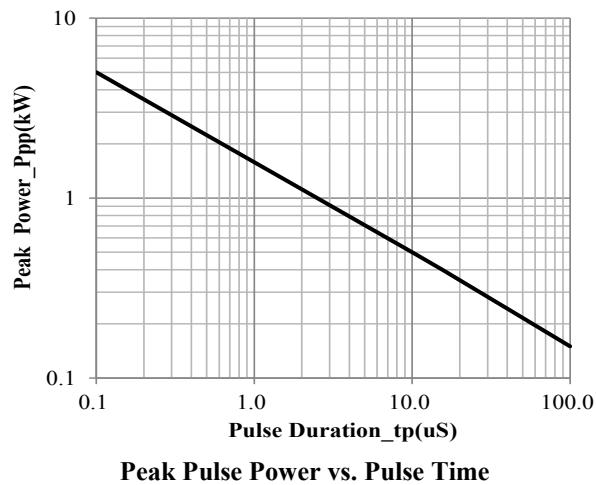


**Peak Pulse Power vs. Pulse Time**

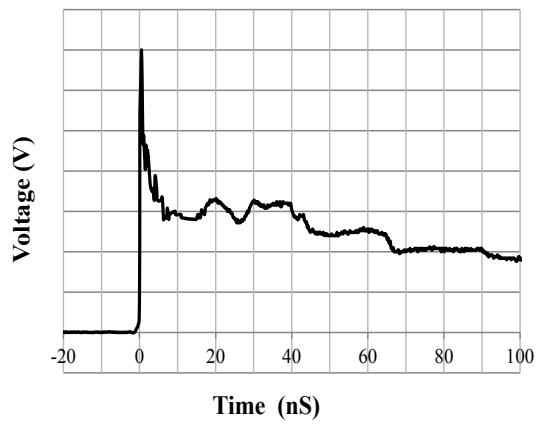

**IEC61000-4-2 Pulse Waveform**

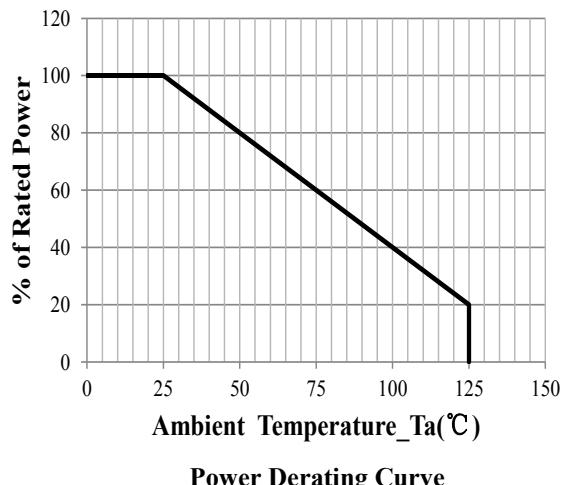

**Power Derating Curve**

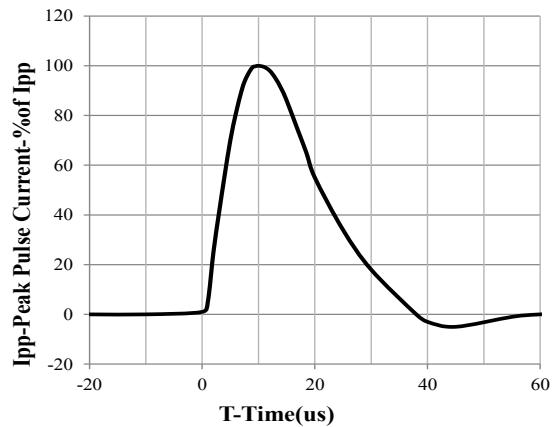

**8 X 20us Pulse Waveform**