




REVISIONS			DOC. NO. SPC-F004 * Effective: 7/8/02 * DCP No: 1398						
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
1868	Α	RELEASED	BYF	11/13/05	НО	11/17/05	JWM	11/17/05	



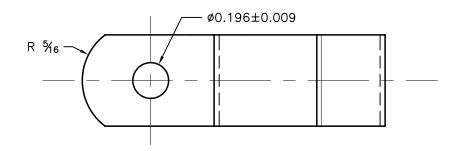

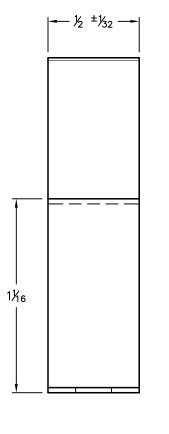

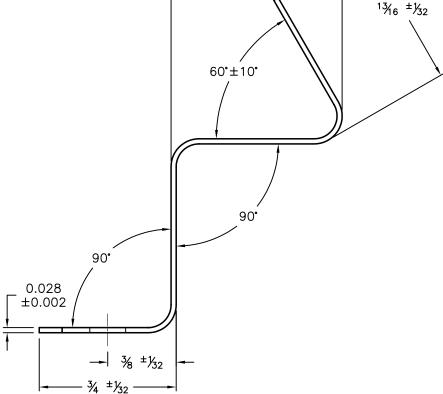

15/16 ±1/32 -

## SPECIFICATIONS:

- Material: Made from D77184E (M009734-11) C.R.R.E.F.W.H.H. Steel or C.R.H.H. slit edge strip steel.
- Plating: Zing plated 0.002 ~ 0.0003" THK. With Blue Trivalent Chromate
- Bracket fits inside cores of 225W Wirewound type resistors and remain in place by spring tension.
- Mounting Screw size (Max.) #10 Screw

SPC-F004.DWG

TOLERANCES:	DRAWN BY:	DATE:		NG TITLE:	_					
UNLESS OTHERWISE	BASAM YOUSIF	11/13/05	RoHS	Compliant M	lounting Bro	acket fo	or Wi	rewound	Resis	itors
SPECIFIED, Angles ±0.5°	CHECKED BY:	DATE:	SIZE	DWG. NO.			ELEC1	TRONIC FILE		REV
.XX ±0.010	HISHAM ODISH	11/17/05		MC14691			28K6305.DWG			Α
.XXX ±0.005	APPROVED BY:	DATE:			U.O.M.: INCHES					$\overline{}$
Fractions ±1/64	JEFF MCVICKER	11/17/05	SCALE	: NTS				SHEET: 1 OI		<sup>:</sup> 1

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.