
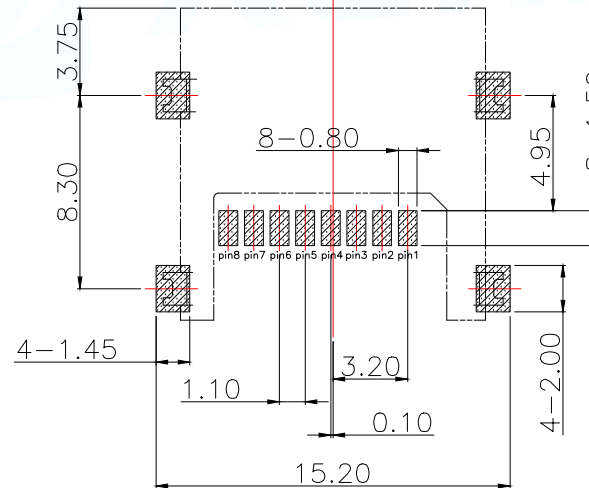
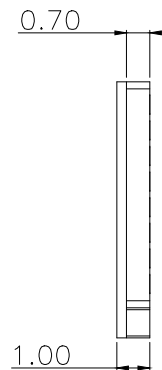
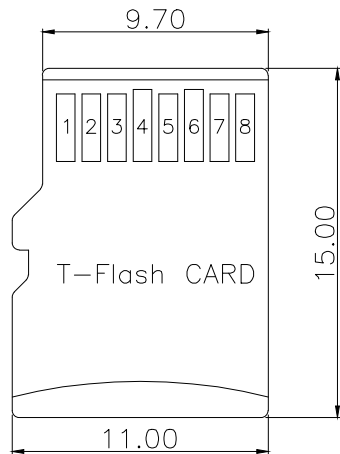
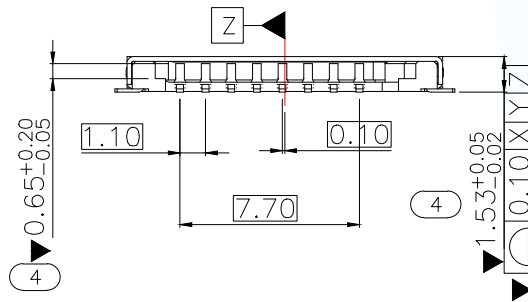
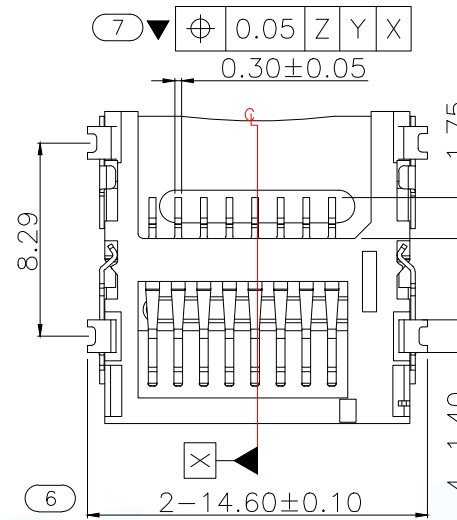


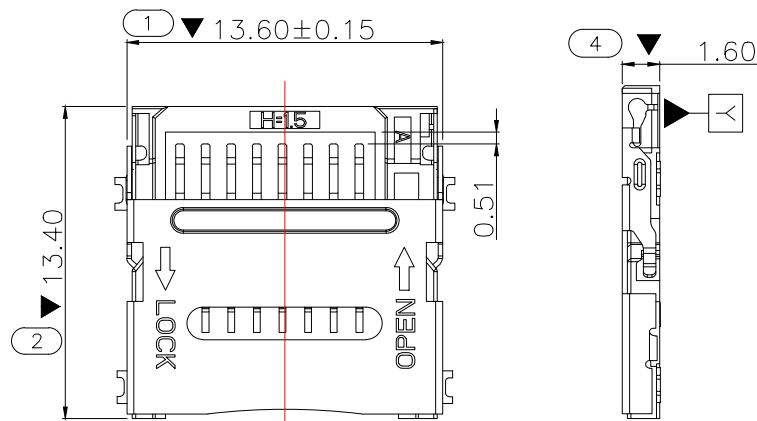

PAD AREA
KEEP OUT AREA

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

NOTE:

1.FINISH:

1-1.CONTACT: AU 1U" PLATING ON CONTACT AREA,
100~200U" SN PLATING ON SOLDER TAILS,
50U" NICKEL UNDERPLATING VOER ALL;

1-2.SHELL: NO PLATING;

2.PRODUCT SPECIFICATIONS:


2-1.VOLTAGE RATING: 100V

2-2.CURRENT RATING: 0.5A

2-3.INSULATION RESISTANCE: 1000 MEG.OHM MIN


2-4.CONTACT RESISTANCE: 100 MILL.OHM MAX

2-5.OPERATION TEMPERATURE: -20° TO $+85^{\circ}$

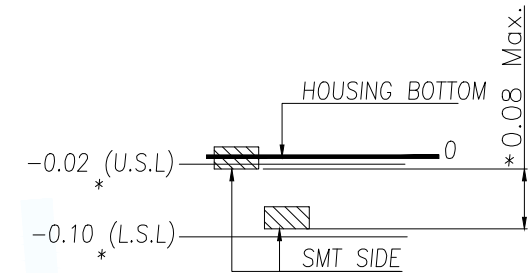

TF CARD PIN DEFINE

PIN NO.	NAME	YTYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

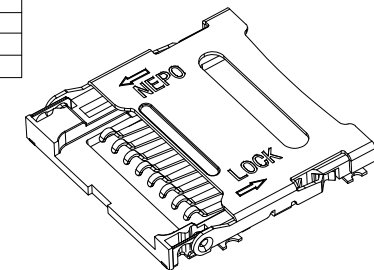

MANUFACTURE DWG



东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,Ltd

UNLESS OTHERWISE
SPECIFIED TOLERANCES



TITLE:T-FLASH CARD HINGED
H1.6 数据卡

PAR TF-102-ARP8H16

DECIMALS:

ANGLES:

X.: ± 0.50

X': $\pm 2^{\circ}$

X.X: ± 0.30

X.X': $\pm 1^{\circ}$



X.XX: ± 0.20

X.XX': $\pm 0.5^{\circ}$




CUSTOMER COPY

SCALE:1:1 UNIT:MM

SIZE:A4 SHEET:1F1 REV:A

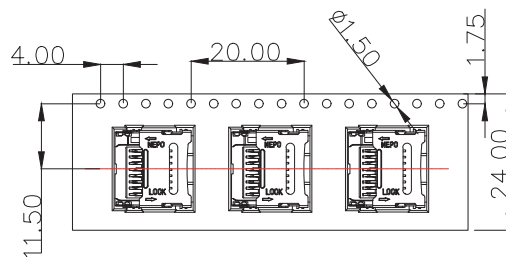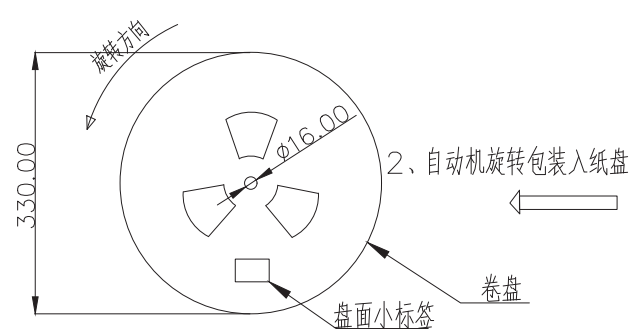


1、产品平整包装入载带

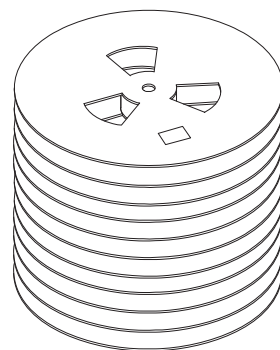


天地板

3、11 盘整齐叠放, 上下各加一块天地板

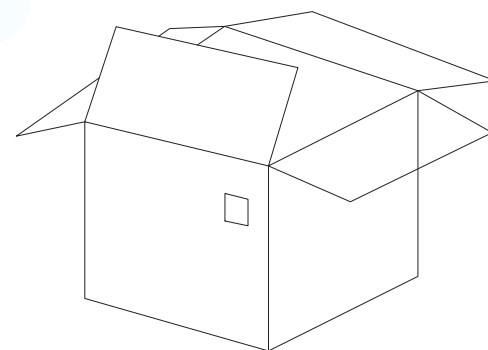

4、装箱

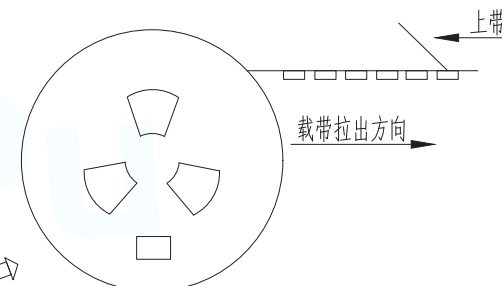

NOTE:

1. QUANTITY/1500 PCS

数量/卷: 1500PCS

2. QUANTITY/INNER

CARTON: 1500X11=16500PCS

数量/箱: 1500X10=15000PCS

3. FREE 25 CAVE THE FRONT CARRIER
ADN FREE

25 CAVE IN THE END CARRIER

包装带内圈空25格, 外圈空25格

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: T-FLASH CARD HINGED H1.6 掀盖T卡
DECIMALS:	ANGLES:		PAR TF-102-ARP8H16
X.: ± 0.50	X.: $\pm 2^\circ$		DWN
X.X: ± 0.30	X.X: $\pm 1^\circ$		CHKD
X.XX: ± 0.20	X.XX: $\pm 0.5^\circ$		APVD
CUSTOMER COPY		SCALE 1:1	UNIT: MM
		SIZE: A4	SHEET: 1F1
			REV: A