





## Test probes

### PRUEF 2600



Product	PRUEF 2600
description	Test probe with shatter-proof insulating sleeve and slender stainless steel tip. Tip for penetration of oxide layers. 4 mm diameter brass socket connection. Connects with safety measuring leads.
operating instruction	BA464
article-no. / *colour	9723171xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black         </div> <div style="text-align: center;">  01 red         </div> </div>
drawing	 <p>Technical drawing showing dimensions: 21, 19, 4 (max.), 94, 37, 4, 13, 4.3, 2, 4, 13. Handling area: Griffbereich handling area.</p>
technical data	
connection	unsprung socket 4 mm
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current (consider derating curve)	1 A
material socket	brass
housing material	PP
temperature range acc. To IEC61010 <sup>(1)</sup>	-25 °C to +70 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	HB

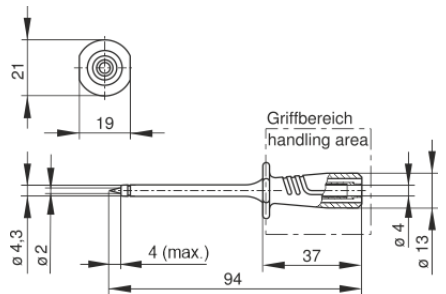4 mm safety system

<sup>(1)</sup> contact the manufacturer for applications at deviating temperature ranges  
stand: 21.06.2022

stand: 21.06.2022