


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL DRAWING	09FEB2016	GSK	BvH
	A1	ECR-17-001194	31JAN2017	RK	PFR

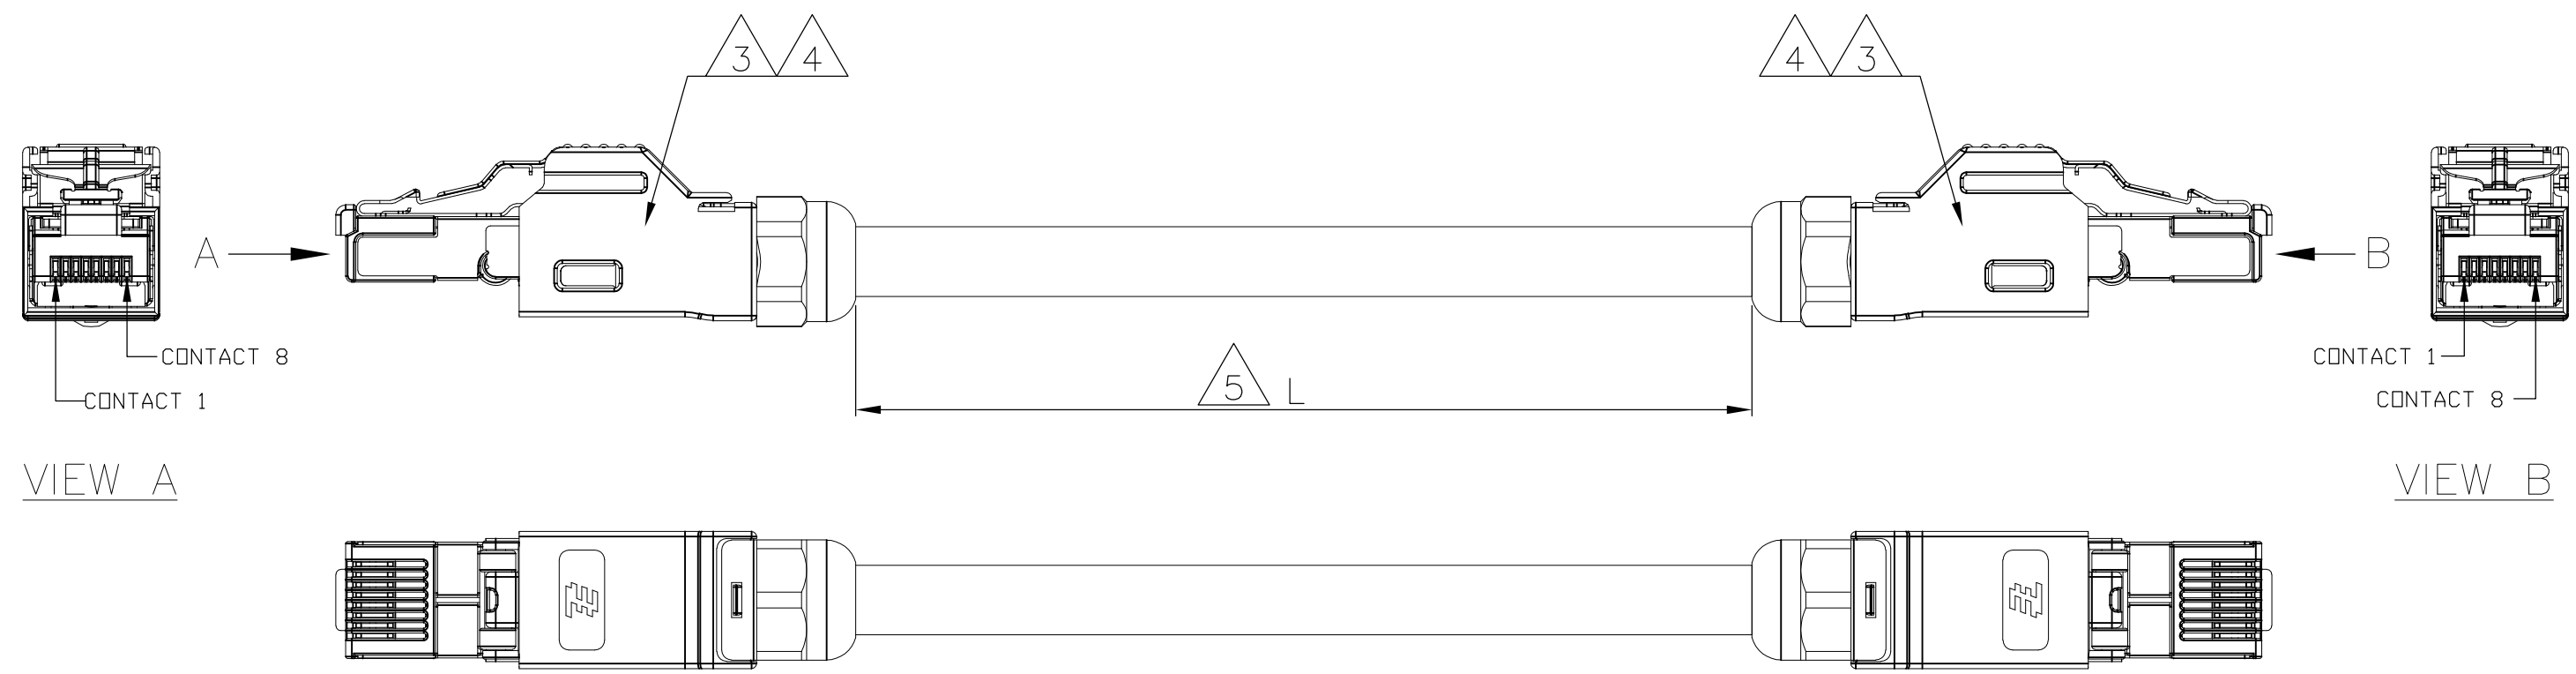

- NOTES:**
- 1 PACKAGING: ACC. TO TE SPEC. 107-18032
  - 2 ELECTRICAL TEST ACCORDING TE SPECIFICATION 108-18857. SHORT-CIRCUIT AND CONTINUITY TEST AT 500V DC, 0.1s
  - 3 KEEP THE DIRECTION OF CONNECTOR TO THE CABLE ON BOTH SIDE THE SAME
  - 4 WIRING SCHEMA ACC. TO TIA/EIA-568-B AS SHOWN IN WIRING SCHEDULE

WIRING SCHEDULE 4

CAVITY SIDE A	COLOR	CAVITY SIDE B
1	WH/OG	1
2	OG	2
3	WH/GN	3
4	BU	4
5	WH/BU	5
6	GN	6
7	WH/BN	7
8	BN	8

Length/m	Cable version	TE PN
10	HiFlex MultiPurpose	1-2300160-6
5	HiFlex MultiPurpose	1-2300160-5
3	HiFlex MultiPurpose	1-2300160-4
2	HiFlex MultiPurpose	1-2300160-3
1	HiFlex MultiPurpose	1-2300160-2
0.5	HiFlex MultiPurpose	1-2300160-1
10	HI 125°C	-2300160-6-
5	HI 125°C	-2300160-5-
3	HI 125°C	-2300160-4-
2	HI 125°C	-2300160-3-
1	HI 125°C	-2300160-2-
0.5	HI 125°C	-2300160-1-

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09FEB2016 SATHISH KUMAR .G		<b>STE</b> TE Connectivity	
DIMENSIONS: mm		CHK 09FEB2016 B.VELDHOVEN			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 09FEB2016 A.VAN ZANDVOORT		NAME CA IND RJ45STR 8POS	
0 PLC ± -		PRODUCT SPEC 108-78381		SIZE	
1 PLC ± -		APPLICATION SPEC 114-5402		CAGE CODE	
2 PLC ± -		WEIGHT		DRAWING NO	
3 PLC ± -		CUSTOMER DRAWING		A3 00779 C-2300160	
4 PLC ANGLES ± 1°		SCALE NTS		SHEET 1 OF 1	
MATERIAL -		FINISH -		REV A1	