

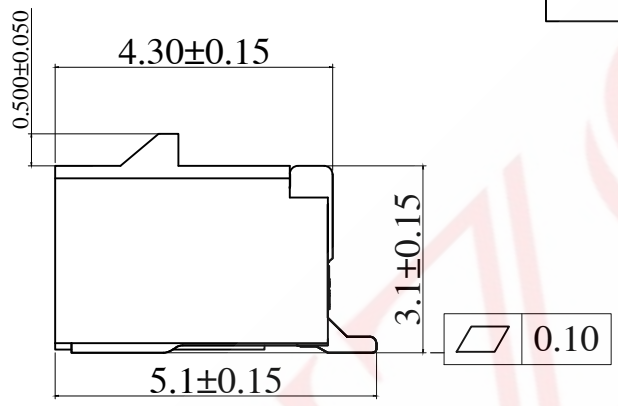


1 SAMZO 2 REAC/ROHS

REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2013.06.21

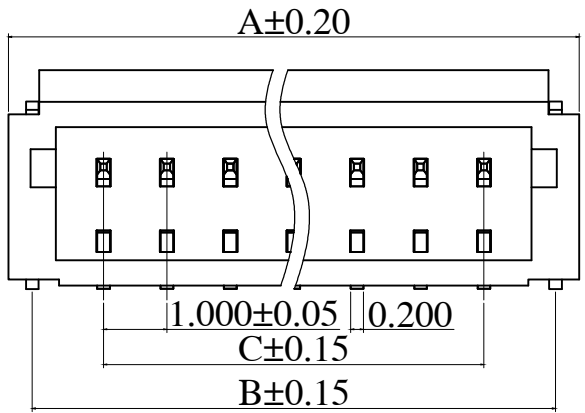

◆ SPECIFICATIONS
 Current rating: 1A AC, DC
 Voltage rating: 125V AC,DC
 Temperature range: -25°C ~ +85°C
 Insulation resistance: 100MΩ Min.
 Withstanding voltage: 500V AC/ minute.
 Contact resistance: 20m Ω Max.

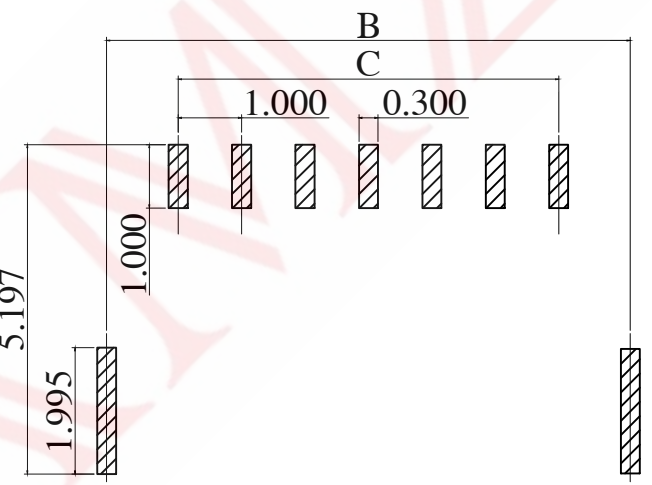

P 数	DIM=A	DIM=B	DIM=C
2	4.00	3.24	1.00
3	5.00	4.24	2.00
4	6.00	5.24	3.00
5	7.00	6.24	4.00
6	8.00	7.24	5.00
7	9.00	8.24	6.00
8	10.00	9.24	7.00
9	11.00	10.24	8.00
10	12.00	11.24	9.00
11	13.00	12.24	10.00
12	14.00	13.24	11.00
13	15.00	14.24	12.00
14	16.00	15.24	13.00
15	17.00	16.24	14.00
16	18.00	17.24	15.00

A. SERISE: 6N-SH LOCK
 B. SPACING: F-1.00mm
 C. MOUNTING: D-WT
 D. STANDARD: A-WAFER
 E: PIN: 02-2P (02-16P)
 F: CODE: 0-REGULAR

6N F D A ** 0
 A B C D E F

Recommended P.C.Board Layout

ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR					
1	针脚	黄铜	N	镀锡					
2	主体	LCP	1	XXX					
					GENERAL TOLERANCE				
					DESIGN	WANGGUIFA	2018.06.12	≥0~2<	±0.15
					CHECKED	ZHENGUILAN	2018.06.12	≥2~5<	±0.25
					APPROVED	LILIANJIANG	2018.06.14	≥0~2<	±0.15
								≥5	±0.35

FIRST VIEW

SCALE 1:1 UNIT mm

WWW.KKK-JP.COM

SAMZO COMPONENTS
 Electronic switch and connector manufacturer

TITLE: SH1.0 LOCK-WT
 DWG NO: 6NFD-P110
 PART NO: 6NFD10001
 MODEL NO: 6NFDA-**-0
 NAME: WAFER CONNECTOR