
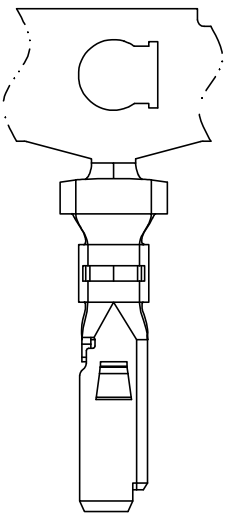
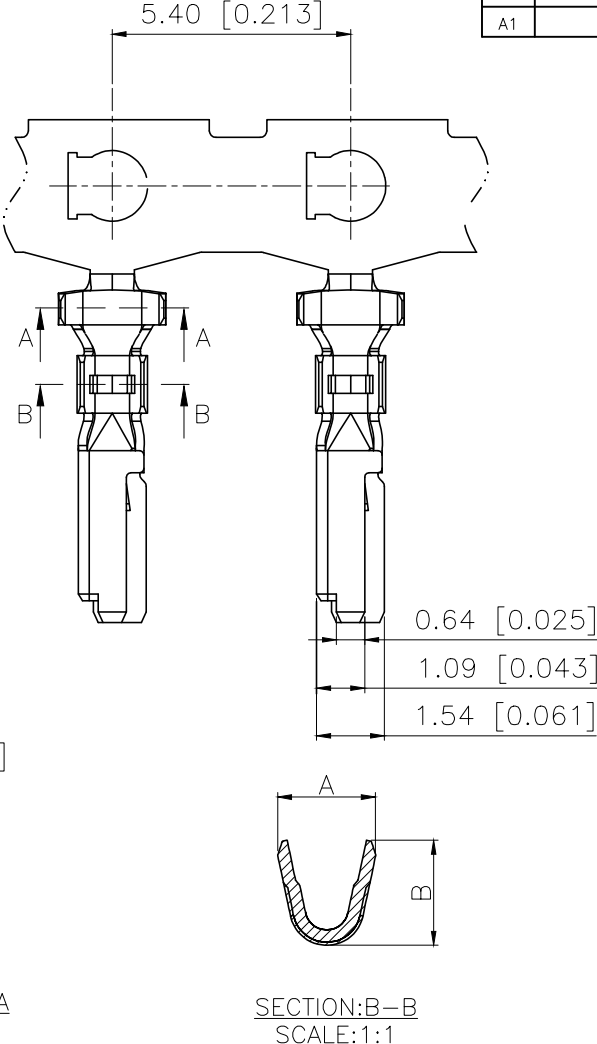


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.3	阿树

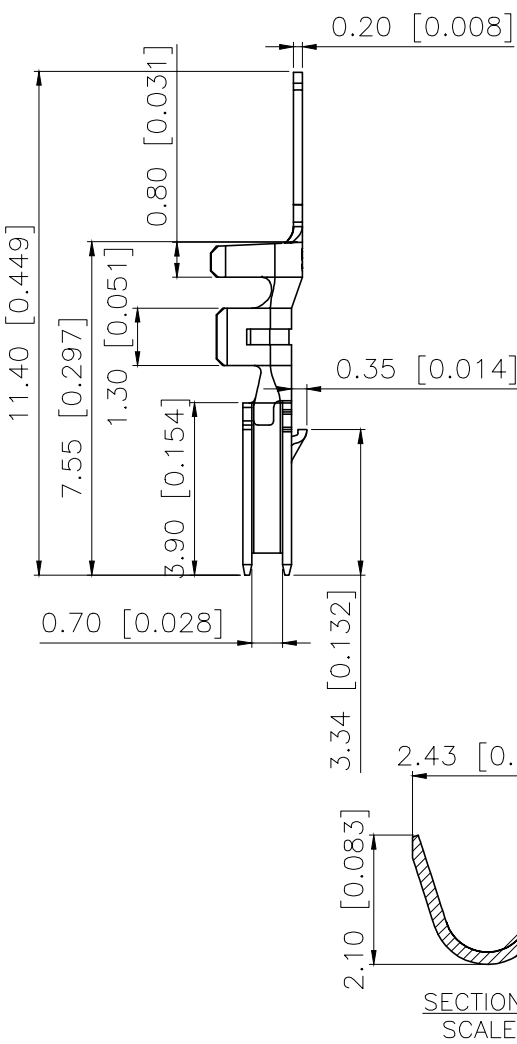

Specifications:
规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3VA AC/DC
Withstanding voltage:800V AC/minute
耐受电压: 1000V AC/分钟
Temperature range:-40℃-+105℃
温度范围: -40℃-+105℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance:≤20mΩ
接触电阻: ≤20mΩ
After environmental testing:≤40mΩ
环境测试后: ≤40兆欧

PART NO.:

X2023 T-P SN
① ② ③ ④

- ①Series Number.
- ②Category: T-terminal
- ③Material: P-Phosphorous bronze
- ④Plating Category:SN-Bright Tin Plating

X2023T-PSN	Phosphor Bronze	AWG#24-26	ø1.05-1.2mm	Ni:40-120U"(1.0-3.0um)Bright tin :80-200u "(2.0-5.0um)	X2023H	1.45	1.35
PART NO	Material	Wire Range	Insulation O.D	Finish	Suitable XKB Terminal	A	B

AuGLAR	±5°		DESIGN	阿树	VIEW: 	MODEL TYPE: 2.00mm Crimp Style Connectors		
X.	±0.40		CHECKED		UNIT: mm/in	PART NO.: X2023T-PSN		
X.x	±0.30		APPROVED		SIZE: A4	DWG NO.:		
X.xx	±0.20							
X.xxx	±0.15							
UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				SCALE N/A	PAGE 1/1	REVISION A1
www.xk-dg.cn								