
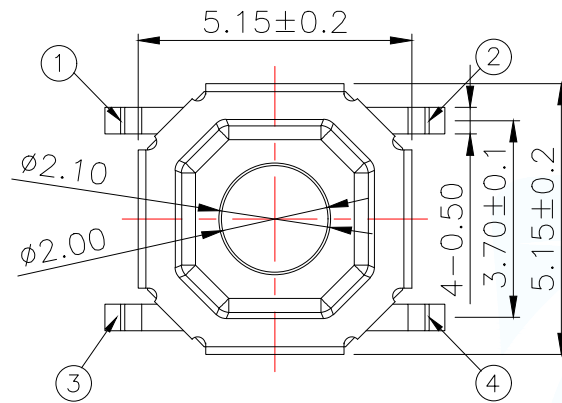
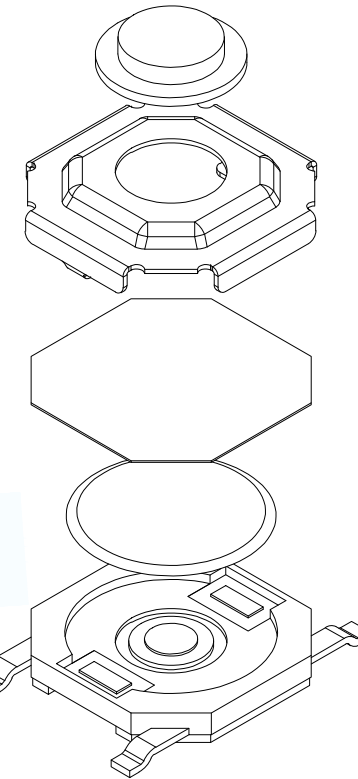
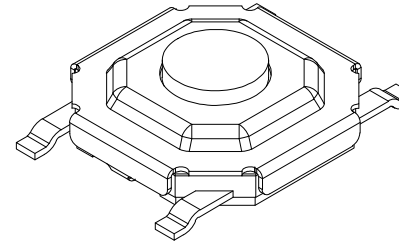
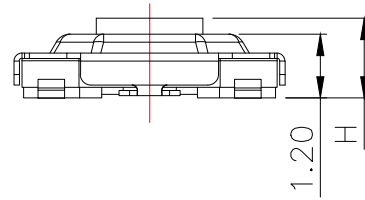


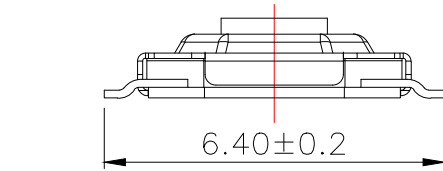

H
1.5
1.6
1.7
1.8
2.0
2.5
...
5.5

TS-1087S- - - - -

弹片:

A:不锈钢

定位柱:

R:无柱

高度:

015:1.5H
016:1.6H
017:1.7H
018:1.8H
019:1.9H
020:2.0H
025:2.5H
....


力度:

10:100g
16:160g
26:260g

主要技术参数、性能


The Main Thchnology Performance

额定电流、电压 Rate voltage,current	50mA DC12V
接触电阻 Contact resistance	≤100mΩ
按力 Operating force	±50gf
行程 travel	0.2±0.1mm
绝缘电阻 Insulated resistance	≥100MΩ
介电强度 Dielectric strength	≥250VAC/1min
工作温度 Operating temperature	-30°C~+80°C



电路图

CIRCUIT DIAGRAM

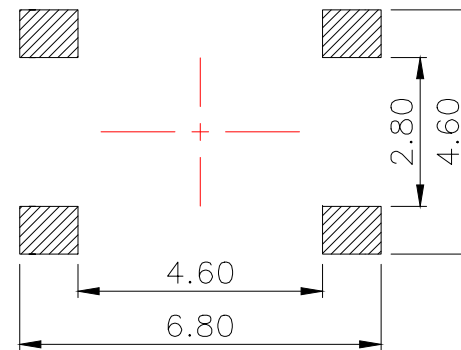

PCB.焊接图

PCB.WELDING DRAWING

E	按钮	黄铜	1	酸洗
D	盖板	不锈钢	1	清洗
C	防尘膜	聚酰亚胺	1	橙黄色
B	弹片	不锈钢	1	镀银
A	卡件	黄铜	1	镀银
项目 ITEM	名称 DESCRIPTION	材质 MATERIAL	数量 QTY	表面处理/颜色 FINSH/COLOR

MANUFACTURE DWG

东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,LtdUNLESS OTHERWISE
SPECIFIED TOLERANCESTITLE:
TACT SWITCH

PAR TS-1087S-ARXXX

DWN

CHKD

APVD

SCALE:1:1 UNIT:MM

SIZE:A4 SHEET:1F1 REV:A

DECIMALS:

0.5~2±0.10

2~5±0.25

5~10±0.30

ANGLES:

±0.5°

CUSTOMER COPY