

NEW!


Power Inductors – RFC0807 Series



- Low cost, high current power inductors
- 39 inductance values; 12 μ H to 18 mH

Core material Ferrite**Terminations** RoHS compliant tin-silver over tin over copper over steel. Other terminations available at additional cost**Environmental** RoHS compliant, halogen free**Weight** 1.30 – 1.50 g**Ambient temperature** -40°C to $+85^{\circ}\text{C}$ with Irms current, $+85^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ with derated current**Storage temperature** Component: -40°C to $+125^{\circ}\text{C}$.
Tray or tape packaging: -40°C to $+80^{\circ}\text{C}$ **Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at $<30^{\circ}\text{C}$ / 85% relative humidity)**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SRA-332

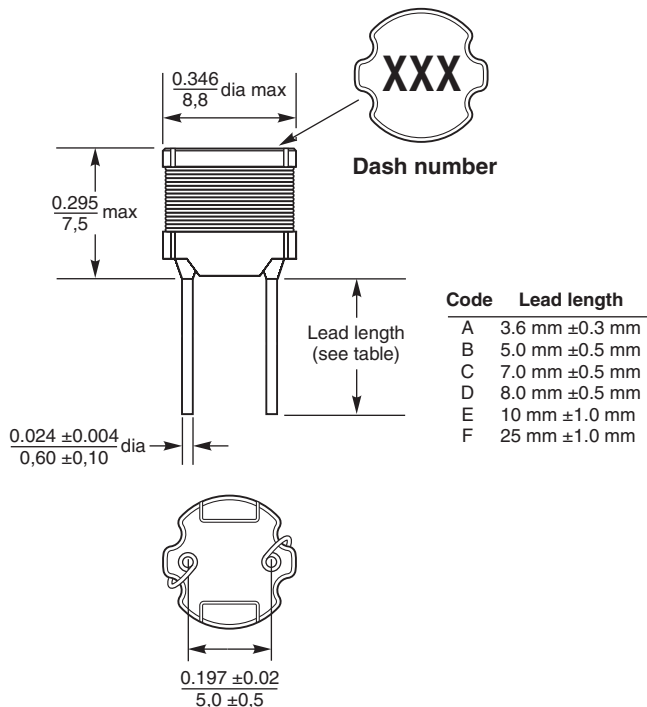Packaging 150 parts per tray (except parts with 25 mm lead length);
Parts with 25 mm lead length: in fanfold tape, 800 parts per box**PCB washing** Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdfDimensions are in $\frac{\text{inches}}{\text{mm}}$ 

www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1118-1 Revised 01/13/14

© Coilcraft Inc. 2014

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

NEW!

Power Inductors – RFC0807 Series



| Part number ¹ | Inductance ² ±10% (µH) | DCR (Ohms) | | SRF typ ³ (MHz) | Isat (A) ⁴ | | | Irms (A) ⁵ | |
|--------------------------|--------------------------------------|------------|-------|-------------------------------|-----------------------|----------|----------|-----------------------|-----------|
| | | typ | max | | 10% drop | 20% drop | 30% drop | 20°C rise | 40°C rise |
| RFC0807B-123KE | 12 | 0.035 | 0.045 | 20 | 5.70 | 6.30 | 6.65 | 2.50 | 3.60 |
| RFC0807B-153KE | 15 | 0.050 | 0.060 | 19 | 4.95 | 5.53 | 5.85 | 2.15 | 3.10 |
| RFC0807B-183KE | 18 | 0.060 | 0.070 | 16 | 4.70 | 5.23 | 5.55 | 2.00 | 2.80 |
| RFC0807B-223KE | 22 | 0.075 | 0.090 | 13 | 4.10 | 4.60 | 4.85 | 1.75 | 2.50 |
| RFC0807B-273KE | 27 | 0.085 | 0.100 | 12 | 3.70 | 4.13 | 4.37 | 1.70 | 2.35 |
| RFC0807B-333KE | 33 | 0.100 | 0.115 | 12 | 3.15 | 3.53 | 3.74 | 1.50 | 2.15 |
| RFC0807B-393KE | 39 | 0.125 | 0.145 | 10 | 2.85 | 3.20 | 3.40 | 1.35 | 1.95 |
| RFC0807B-473KE | 47 | 0.145 | 0.165 | 9.2 | 2.55 | 2.87 | 3.04 | 1.25 | 1.80 |
| RFC0807B-563KE | 56 | 0.160 | 0.185 | 8.5 | 2.35 | 2.66 | 2.84 | 1.20 | 1.70 |
| RFC0807B-683KE | 68 | 0.210 | 0.240 | 7.2 | 2.30 | 2.60 | 2.74 | 1.10 | 1.50 |
| RFC0807B-823KE | 82 | 0.240 | 0.275 | 6.4 | 2.13 | 2.37 | 2.53 | 1.00 | 1.40 |
| RFC0807B-104KE | 100 | 0.310 | 0.355 | 6.1 | 1.98 | 2.22 | 2.34 | 0.85 | 1.25 |
| RFC0807B-124KE | 120 | 0.350 | 0.400 | 5.7 | 1.76 | 2.00 | 2.12 | 0.80 | 1.15 |
| RFC0807B-154KE | 150 | 0.410 | 0.470 | 5.3 | 1.62 | 1.82 | 1.93 | 0.75 | 1.05 |
| RFC0807B-184KE | 180 | 0.525 | 0.605 | 4.4 | 1.42 | 1.61 | 1.70 | 0.65 | 0.95 |
| RFC0807B-224KE | 220 | 0.600 | 0.690 | 4.1 | 1.32 | 1.48 | 1.57 | 0.60 | 0.85 |
| RFC0807B-274KE | 270 | 0.700 | 0.805 | 3.6 | 1.20 | 1.34 | 1.43 | 0.55 | 0.80 |
| RFC0807B-334KE | 330 | 0.910 | 1.05 | 3.4 | 1.08 | 1.21 | 1.30 | 0.50 | 0.72 |
| RFC0807B-394KE | 390 | 1.00 | 1.15 | 3.3 | 1.03 | 1.16 | 1.23 | 0.45 | 0.64 |
| RFC0807B-474KE | 470 | 1.35 | 1.55 | 2.9 | 0.90 | 1.02 | 1.10 | 0.40 | 0.55 |
| RFC0807B-564KE | 560 | 1.50 | 1.70 | 2.7 | 0.85 | 0.93 | 1.01 | 0.37 | 0.52 |
| RFC0807B-684KE | 680 | 1.75 | 2.00 | 2.5 | 0.77 | 0.83 | 0.92 | 0.34 | 0.48 |
| RFC0807B-824KE | 820 | 2.25 | 2.60 | 2.1 | 0.68 | 0.77 | 0.82 | 0.30 | 0.42 |
| RFC0807B-105KE | 1000 | 2.60 | 3.00 | 2.0 | 0.62 | 0.68 | 0.72 | 0.28 | 0.40 |
| RFC0807B-125KE | 1200 | 3.35 | 3.85 | 1.7 | 0.56 | 0.62 | 0.66 | 0.25 | 0.35 |
| RFC0807B-155KE | 1500 | 3.95 | 4.55 | 1.6 | 0.52 | 0.57 | 0.60 | 0.22 | 0.32 |
| RFC0807B-185KE | 1800 | 4.40 | 5.05 | 1.5 | 0.48 | 0.53 | 0.56 | 0.21 | 0.30 |
| RFC0807B-225KE | 2200 | 6.00 | 6.90 | 1.3 | 0.43 | 0.47 | 0.49 | 0.18 | 0.26 |
| RFC0807B-275KE | 2700 | 6.95 | 8.00 | 1.2 | 0.38 | 0.42 | 0.44 | 0.17 | 0.24 |
| RFC0807B-335KE | 3300 | 9.10 | 10.5 | 1.0 | 0.35 | 0.38 | 0.40 | 0.15 | 0.21 |
| RFC0807B-395KE | 3900 | 10.0 | 11.5 | 1.0 | 0.33 | 0.35 | 0.37 | 0.14 | 0.20 |
| RFC0807B-475KE | 4700 | 14.0 | 16.0 | 0.90 | 0.29 | 0.31 | 0.33 | 0.12 | 0.17 |
| RFC0807B-565KE | 5600 | 15.5 | 17.5 | 0.80 | 0.27 | 0.29 | 0.31 | 0.11 | 0.16 |
| RFC0807B-685KE | 6800 | 20.0 | 23.0 | 0.70 | 0.24 | 0.26 | 0.27 | 0.10 | 0.14 |
| RFC0807B-825KE | 8200 | 22.5 | 25.5 | 0.60 | 0.22 | 0.24 | 0.26 | 0.095 | 0.133 |
| RFC0807B-106KE | 10,000 | 25.5 | 28.0 | 0.60 | 0.21 | 0.22 | 0.24 | 0.090 | 0.125 |
| RFC0807B-126KE | 12,000 | 34.0 | 37.5 | 0.60 | 0.19 | 0.20 | 0.22 | 0.080 | 0.110 |
| RFC0807B-156KE | 15,000 | 41.5 | 45.5 | 0.50 | 0.16 | 0.18 | 0.20 | 0.070 | 0.100 |
| RFC0807B-186KE | 18,000 | 46.5 | 51.0 | 0.40 | 0.15 | 0.17 | 0.18 | 0.065 | 0.090 |

1. When ordering, specify **lead length** and **termination** codes:

RFC0807B-183E

Lead length: A = 3.6 mm ±0.3 mm (special order)
 B = 5.0 mm ±0.5 mm
 C = 7.0 mm ±0.5 mm (special order)
 D = 8.0 mm ±0.5 mm (special order)
 E = 10.0 mm ±1.0 mm (special order)
 F = 25.0 mm ±1.0 mm, packaged in fanfold tape, 800 parts per box (special order)

Termination: E = RoHS compliant tin-silver over tin over copper over steel.
 Special order: S = non-RoHS tin-lead (63/37)

- Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A LCR-meter or equivalent.
- SRF measured using Agilent/HP 4191A or equivalent.
- DC current at which the inductance drops the specified amount from its value without current.
- Current that causes the specified temperature rise from 25°C ambient.
- Electrical specifications at 25°C.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1118-2 Revised 01/13/14


© Coilcraft Inc. 2014

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.


NEW!

Power Inductors – RFC0807 Series

Typical L vs Current

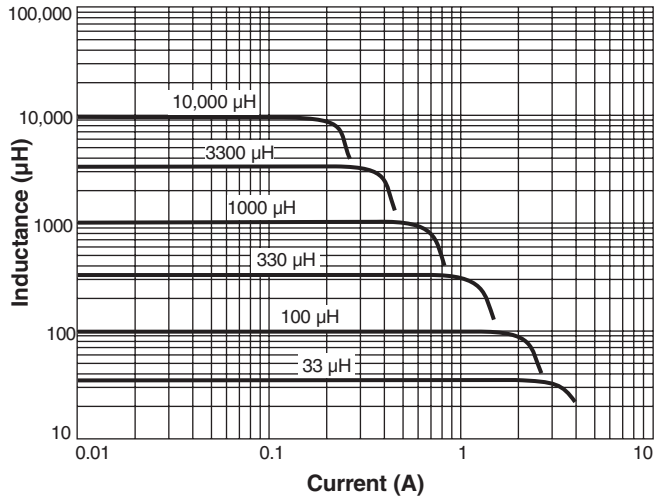

Typical L vs Frequency

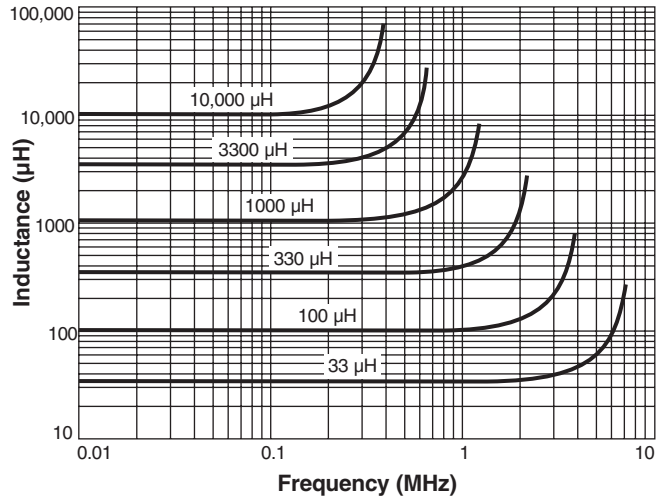

Typical Irms derating

