


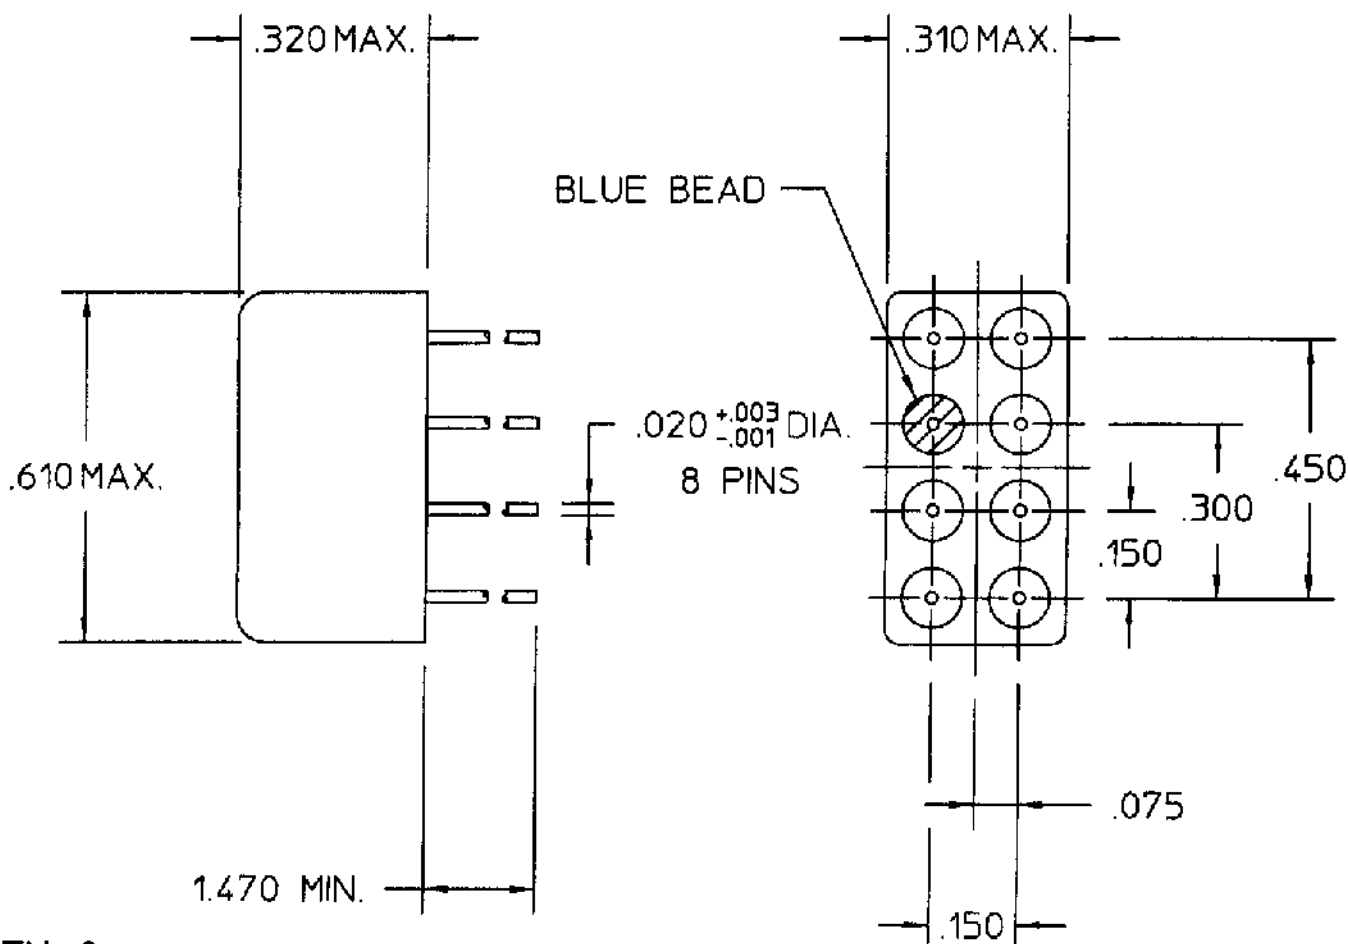

REV. 0

DCO 142341


COIL: @ 25°C	
RESISTANCE	210 OHMS $\pm$ 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	5.4 VDC
MUST RELEASE	3.2 VDC MAX, 0.6 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
 CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

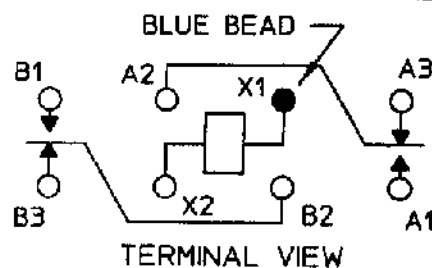

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 50,000 OPERATIONS

DR. PBB 9/13/00 CK.TLG 9-13-00

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M39016/13-076P REV. "3SBC" RELAY

3SBC2021A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SBC2021A2](#)