

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.


Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.

MARKETING SALES DRAWING DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC - []





MINIMUM NO LOAD INSERTION LOSS

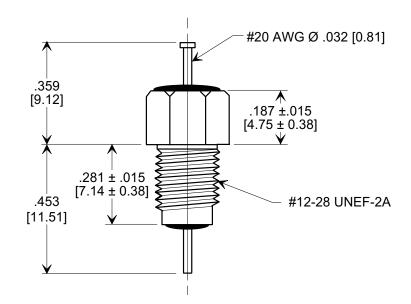

NOTES:

MIN.

WORKING

- TUSONIX STANDARD PART NUMBER: 4204-001.
 TUSONIX RoHS COMPLIANT PART NUMBER: 4204-001 LF.
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- 2. LEAD FINISH: STANDARD PART #: 60/40 SOLDER PLATED COPPER. RoHS PART #: SILVER PLATED COPPER.
- 3. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- 4. SUPPLIED WITH SILVER PLATED COPPER ALLOY HEX NUT AND INTERNAL TOOTH LOCK WASHER.

I.R.

| | | | CAP. | | | | AGE | (ldc) | MIN. @ 100 (VDC) | (VDC) | | (dB) AT 25°C PER MIL-STD -220 | | | | |
|----------|-------------------|-------------------|------|----------------------|--------|-----|--------|-------|---------------------|-------|-------|---|---------|-------------------------|-------|-------------|
| | | (pF) | | | | (VD | (C) | | | ` | | 10 | 100 | 1 | 10 | |
| | | 1 | 1500 | | | °C | 125 °C | 10 A | 10 G Ω | 7 | 00 | MHz | MHz | GHz | GHz | |
| | | ' | 1300 | | 350 | | 200 | 10 A | 10 G 12 | , | 00 | 5 | 45 | 70 | 70 | |
| DECOBD | | FMT & ADDED 02 | | TES, IR & DWV. 06 | | - | | | | | Unle | LERANCES- ess Otherwise Specified | • | BUSHING EMI FI | LTER | |
| | ase 2898 | ו ה' ח | -9- | | | | | | | | ANGLI | ES ± /// | ✓ Drawn | S.M. 05-22-02 | So | cale 3 X |
| Rev-0 | Rele | C. 02-12 | 0522 | | | | | | | | | ISONIX | Approv | Approved J.Mc. 05-22-02 | | |
| X-2015 F | Orignal R C.O. | RDN TO | 2002 | ADDED I S.M. 02- | 200601 | | | | | | | ON, ARIZON | | 420 | 4-001 | |

D\AA /