



**MTA 156**

TE Internal #: 640445-5


Header, Plug, Wire-to-Board, 5 Position, 3.96 mm [.156 in]

Centerline, Printed Circuit Board, UL 94V-0, MTA 156, Rectangular

Power Connectors

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

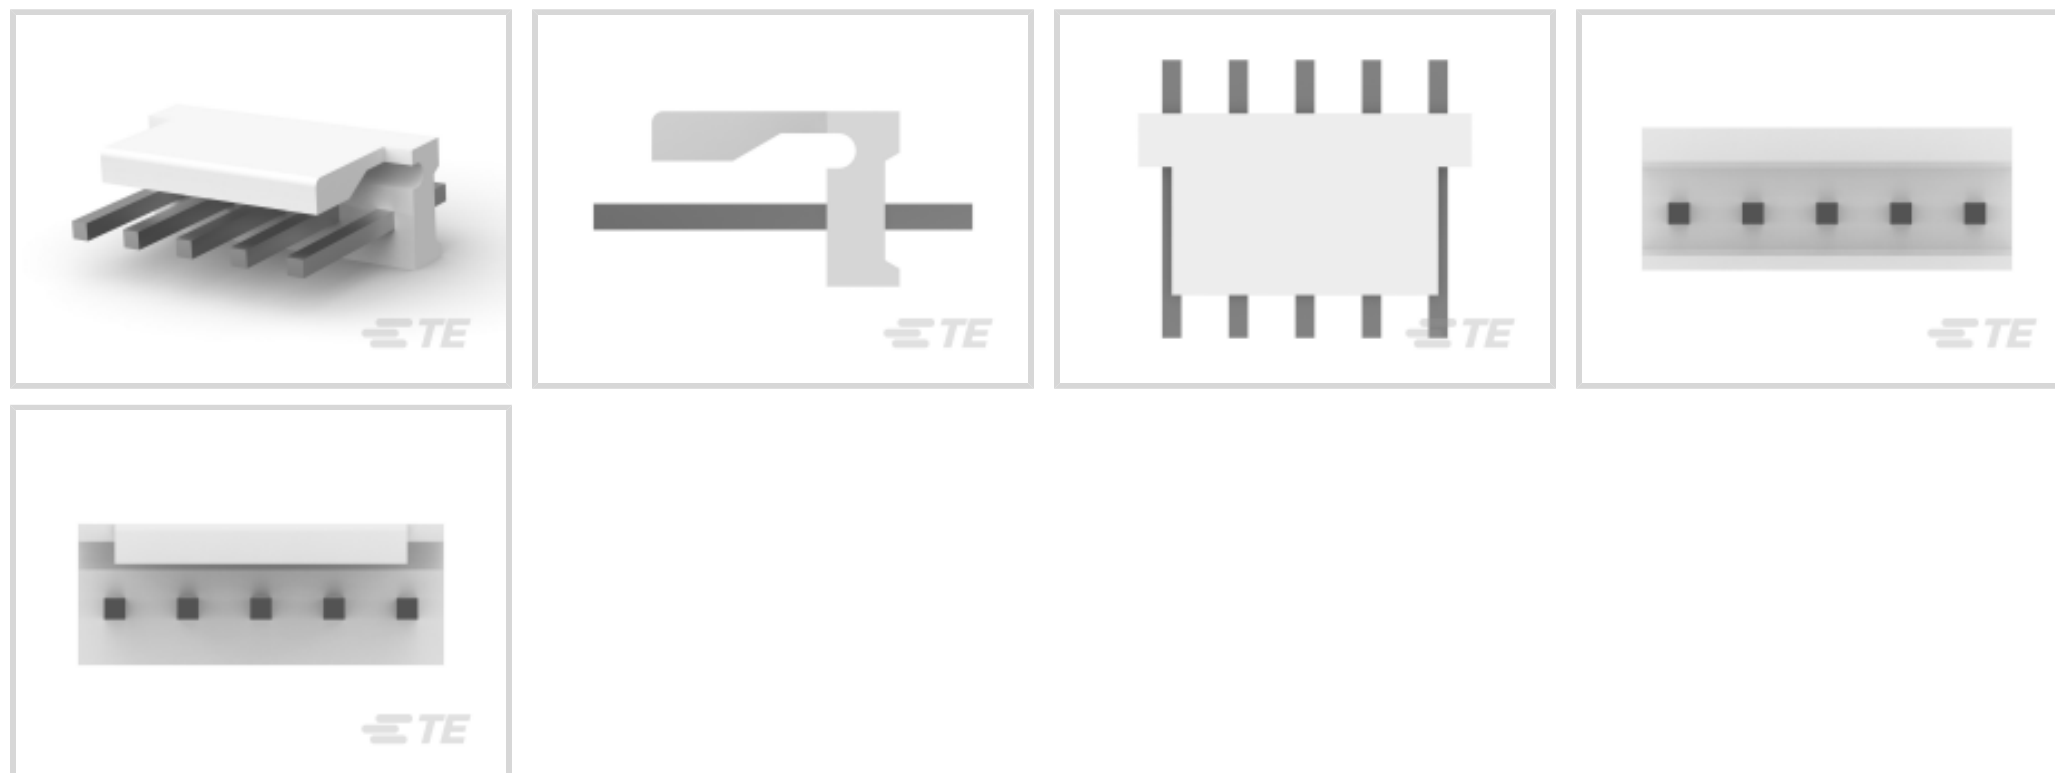

Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Board**

Number of Positions: **5**

Centerline (Pitch): **3.96 mm [.156 in]**

**Features**

**Product Type Features**

Header Type	Partially Shrouded
Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

**Configuration Features**

Number of Positions	5
PCB Mount Orientation	Vertical
Number of Power Positions	5
Number of Rows	1

**Electrical Characteristics**

Operating Voltage	600 VAC
-------------------	---------

**Contact Features**



Mating Post Length	10.16 mm[.4 in]
Contact Layout	Inline
Contact Mating Area Plating Material	Tin
Contact Underplating Material	Nickel
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	7 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2.54 $\mu$ m[100 $\mu$ in]

#### Termination Features

Termination Post & Tail Length	3.56 mm[.14 in]
Termination Method to PCB	Through Hole - Solder

#### Mechanical Attachment

Strain Relief	Without
Mating Retention	With
Mating Alignment	Without
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Friction Lock
Connector Mounting Type	Board Mount

#### Housing Features

Centerline (Pitch)	3.96 mm[.156 in]
Housing Color	Natural
Housing Material	Polyester

#### Dimensions

Connector Height	10.79 mm[.425 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Product Length	19.81 mm[.78 in]

#### Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------



### Operation/Application

Circuit Application	Power
---------------------	-------

### Industry Standards

CSA Rating	Certified, LR 7189
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL, VDE
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

### Packaging Features

Packaging Quantity	2000
Packaging Method	Bag/Carton

### Product Compliance








[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C
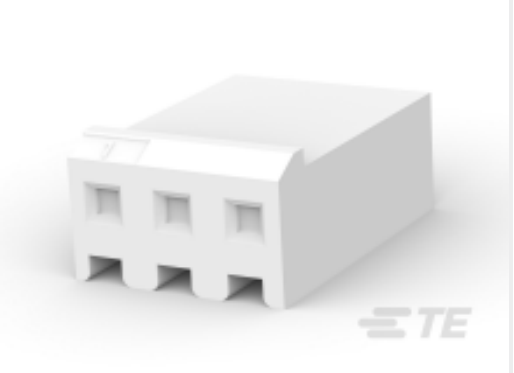
#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts


 <p>TE Part # CAT-103156-WBHSM Receptacle Housing: Wire-to-Board, with Mating Alignment, SL156</p>	 <p>TE Part # 640251-5 05P SL156 HSG W/O LCK RAMP</p>	 <p>TE Part # 640551-5 05P MTA156 COVER</p>	 <p>TE Part # 3-640431-5 05P MTA156 CONN ASSY 18AWG ORA</p>
 <p>TE Part # 3-640428-5 05P MTA156 CONN ASSY 22AWG RED</p>	 <p>TE Part # 3-643818-5 05P MTA156 CONN ASSY 20AWG YEL</p>	 <p>TE Part # 3-640427-5 05P MTA156 CONN ASSY 20AWG YEL</p>	 <p>TE Part # 3-643817-5 05P MTA156 CONN ASSY 18AWG ORA</p>
 <p>TE Part # 3-640426-5 05P MTA156 CONN ASSY 18AWG ORA</p>	 <p>TE Part # 640643-5 05P MTA156 COVER F/T</p>	 <p>TE Part # 3-643819-5 05P MTA156 CONN ASSY 22AWG RED</p>	 <p>TE Part # 3-640599-5 05P MTA156 CONN ASSY 18AWG ORA</p>
 <p>TE Part # 643495-3 05P MTA156 HDR ASSY W/O#2</p>	 <p>TE Part # 3-640432-5 05P MTA156 CONN ASSY 20AWG YEL</p>	 <p>TE Part # 643495-2 05P MTA156 HDR ASSY W/O#2&amp;4</p>	 <p>TE Part # 643495-1 05P MTA156 HDR ASSY W/O#4</p>
 <p>TE Part # 3-640429-5 05P MTA156 CONN ASSY 24AWG WHT</p>	 <p>TE Part # 3-640601-5 05P MTA156 CONN ASSY 22AWG LF</p>	 <p>TE Part # 3-640604-5 05P MTA156 CONN ASSY 18AWG LF</p>	 <p>TE Part # 643067-5 05P MTA156 MOLDED COVER</p>

Also in the Series | **MTA 156**






Connector Caps & Covers(89)

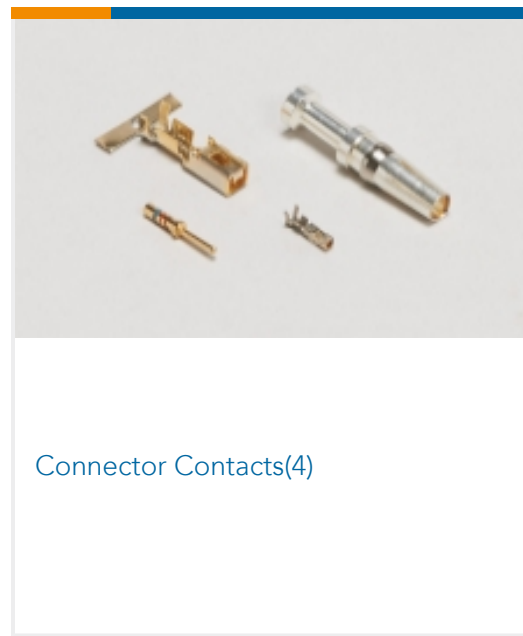

Connector Contacts(4)



Connector Hardware(2)

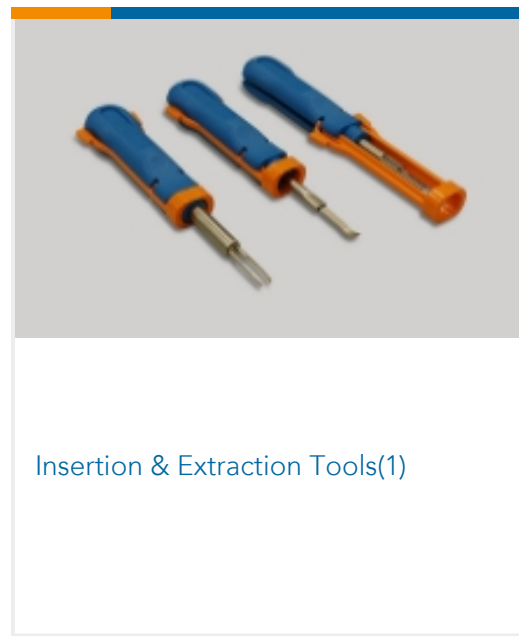


Insertion & Extraction Tools(1)



PCB Headers & Receptacles(317)



Rectangular Power Connectors(691)

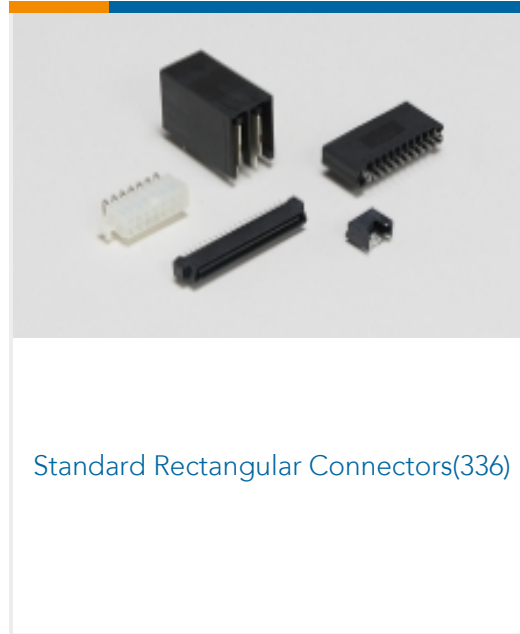

Standard Rectangular Connectors(336)

## Customers Also Bought



TE Part #4-1622825-6  
RL73K 3A R27 5% 4K RL



TE Part #640445-7  
07P MTA156 HDR ASSY FL/STR SN



TE Part #640445-8  
08P MTA156 HDR ASSY FL/STR SN



TE Part #640445-2  
02P MTA156 HDR ASSY FL/STR SN



TE Part #2-1879214-5  
CPF 0402 576R 0.1% 25PPM 1K RL




TE Part #1-2329383-9  
PB OFF/ON FC GRE M4 TERM. IP68



TE Part #1879351-9  
RR01 5% 6K2 AMMO



TE Part #2-647123-2  
02P MTA156 SHRD HDR ASSY SQ SN

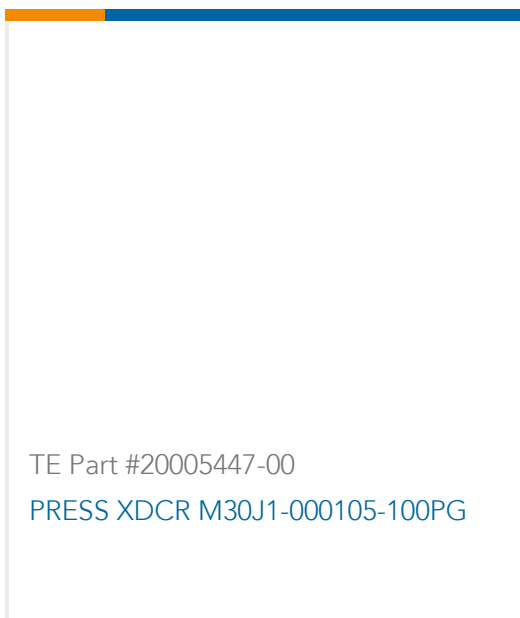

TE Part #20005447-00  
PRESS XDCR M30J1-000105-100PG

## Documents



### Product Drawings

#### 05P MTA156 HDR ASSY FL/STR SN

English

---

### CAD Files

#### Customer View Model

[ENG\\_CVM\\_CVM\\_640445-5\\_AL.2d\\_dxf.zip](#)

English

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_640445-5\\_AL.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_640445-5\\_AL.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Product Specifications

#### Application Specification

English

---

### Agency Approvals

#### CSA Certificate

English

#### CSA Certificate

English

#### CSA Certificate

English