
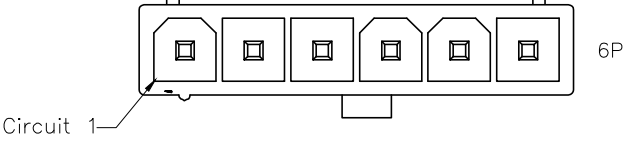
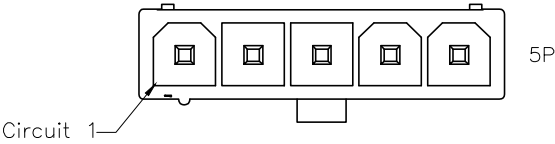
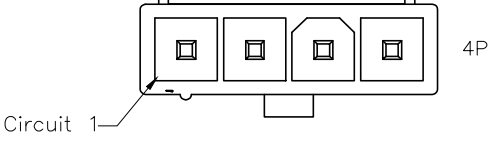
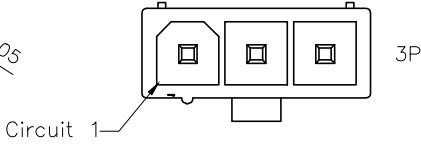
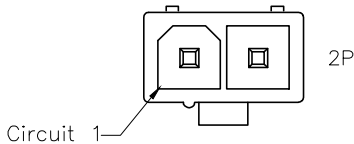
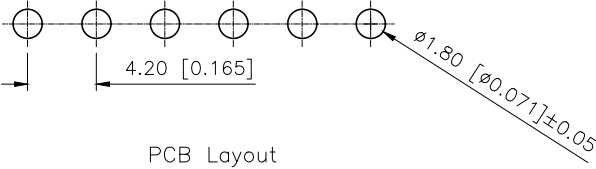


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.07.31	阿树


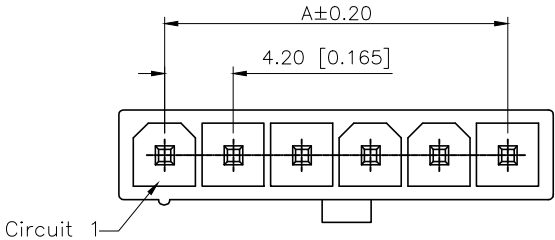


- SPECIFICATIONS
- Voltage rating:600V AC/DC
 - Current rating:9A AC/DC
 - Withstanding Voltage:1500V AC/minute
 - Temperature range:-45°C+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ

PART NO.:
X9357 W V-XX-N2 SN
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:W-Wafer
③Welding Board Angle:V-Stright 1800°
④Row No.Pin No:XX-02~16Pin
⑤Material:N2-PA66 94V-2;N0-PA66 94V-0
⑥Planting:SN-Bright tin plating;
V01:All Gold Flash;

Poles	Dimensions(mm)	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

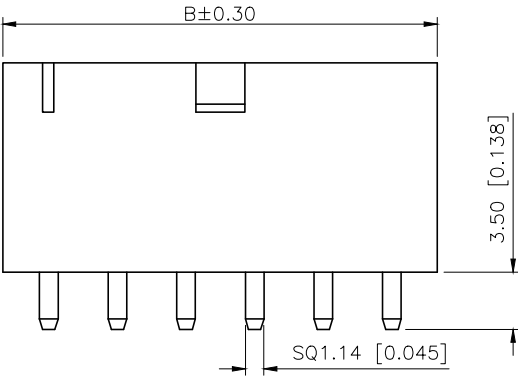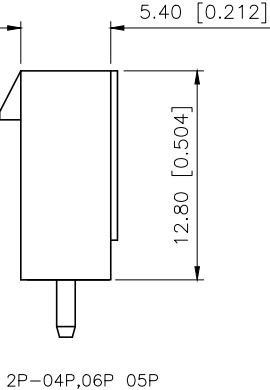

X9357WV-XX-N0V01	Nylon 66 UL 94V-0	Brass	Gold-Flash	X9357H
X9357WV-XX-N0SN			Tin-Plated	
X9357WV-XX-N2V01	Nylon 66 UL 94V-2		Gold-Flash	
X9357WV-XX-N2SN			Tin-Plated	
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 4.20 mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X9357WV-XX-N2SN
APPROVED		SIZE:	A4	DWG NO.: