

| | | | | |
|-----------------|------------|------------|------------------------|------------|
| 标记 REV. LTR. | 日期 DATE | 版别 REV. | 变更内容 REVISION NOTES | 签名 SIGN |
|-----------------|------------|------------|------------------------|------------|

Kinghelm®

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

物理性能: Mechanical:


1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.0kgf (MAX)
Unmate force: 0.7kgf (MIN)
2. 端子保持力: Terminal Retention
0.5kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
High Temperature Thermoplastics,
UL 94V-0 LCP Black
2. 端子: Contact: Copper Alloy H65 EH
3. 外壳: Shell: H 65

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating (能过炉自动上锡)

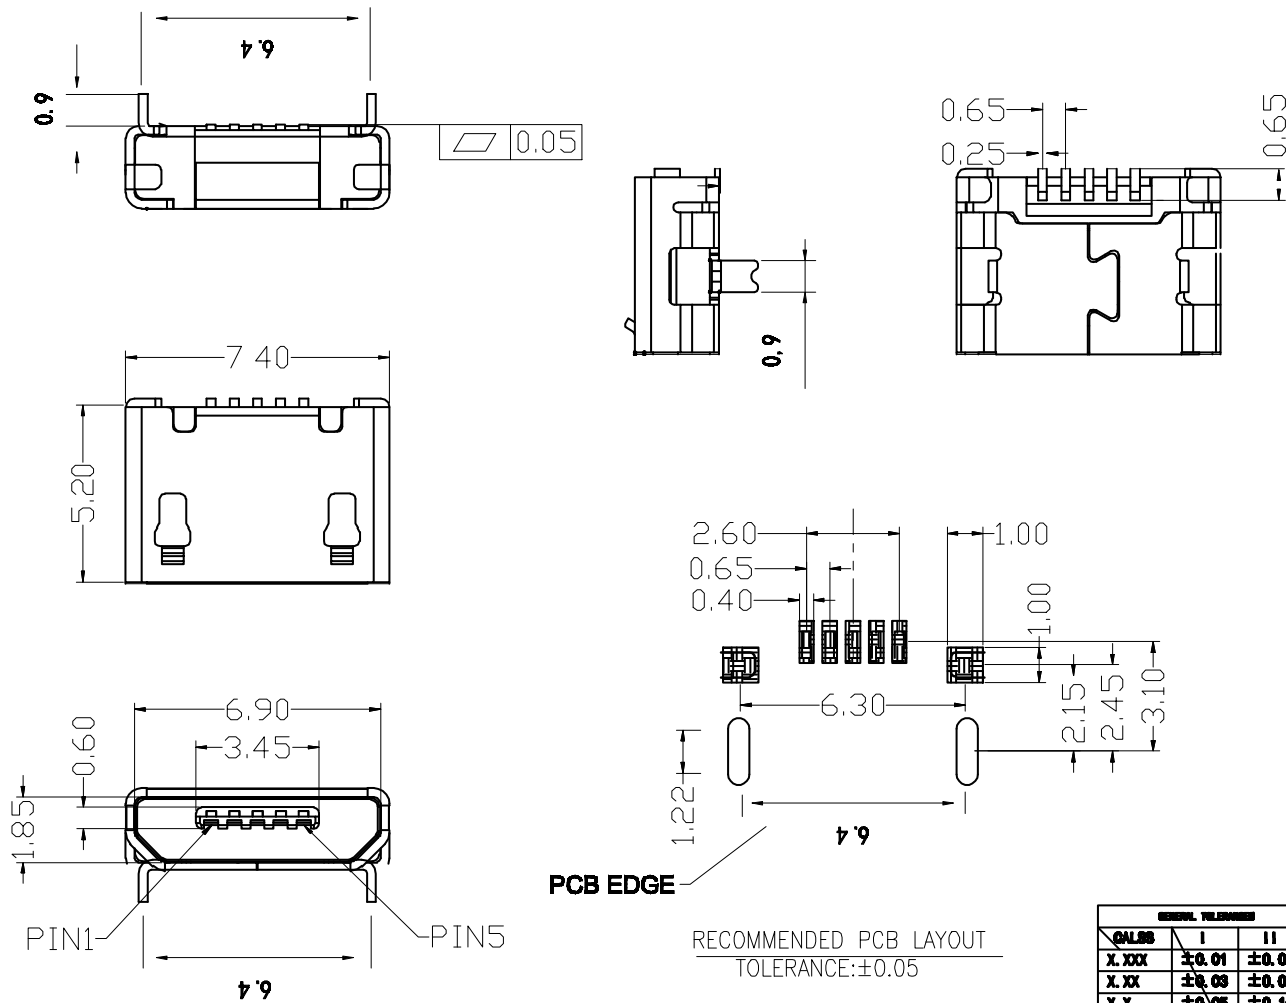

PCB EDGE

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

| GENERAL TOLERANCES | | | |
|--------------------|-------|-------|-------|
| CALIBS | I | II | III |
| X.XXX | ±0.01 | ±0.02 | ±0.03 |
| X.XX | ±0.03 | ±0.05 | ±0.08 |
| X.X | ±0.05 | ±0.10 | ±0.12 |
| X. | ±0.10 | ±0.15 | ±0.20 |
| ANGLE | ±0.5° | ±1.0° | ±2.0° |

| | | |
|-----------------|-------------------------------------|-----------------|
| 品名 TITLE | SHROUDED 56 B TYPE 5.4MM 前插贴片 无柱 | 深圳市金航标电子有限公司 |
| 料号 P/N NO. | XXXXXXXXXX | WWW.BDS666.COM |
| 图号 Dwg. No. | | KH-MICRO6.4H-5P |
| 图名 Dwg. Name | | 0755-83044319 |
| 页次 SHEET | 1/1 | 路径 FILE NAME |

| | |
|-----------------|-----------------|
| 表面处理 PLATING | |
| 料厚 THICKNESS | 版次 REV. A/0 |
| 材料 MATERIAL | 比例 SCALE 1:1 |

| | |
|-------------|----|
| 单位 UNIT | MM |
| 图框 FRAME | A4 |