
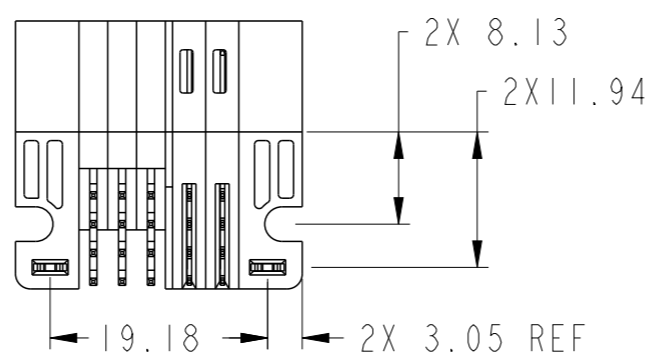
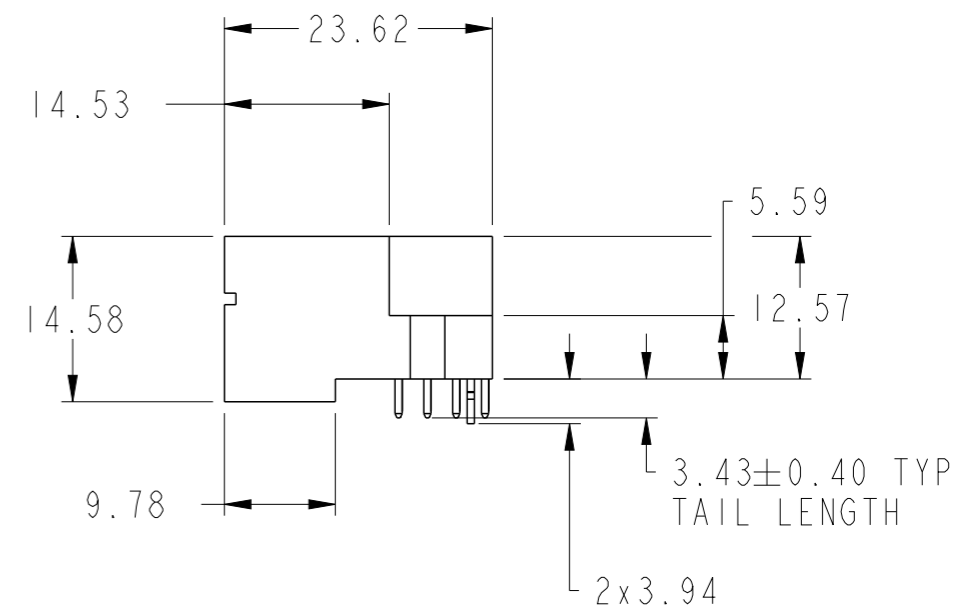
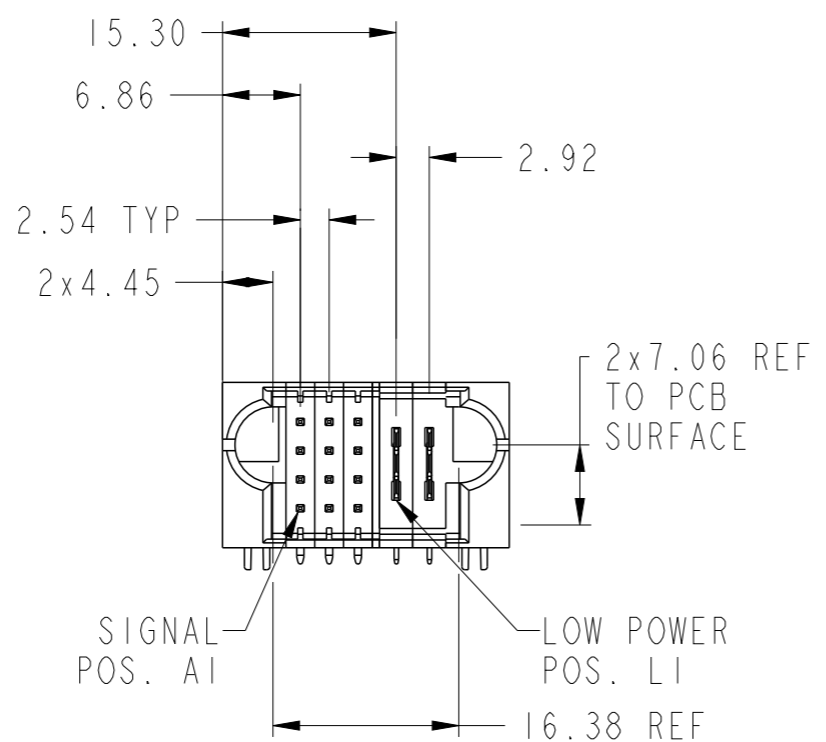



PRODUCT NUMBER SEE SHEET 2

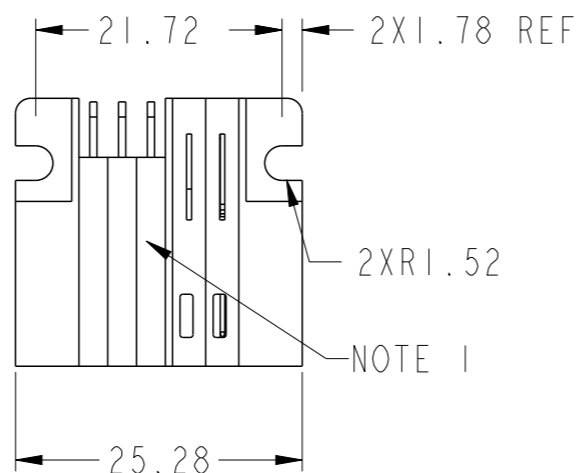

Copyright FCI.

spec ref	*	dr	Vicking Liu	2015/11/09	projection	MM	size	A3	scale	3:2								
tolerance std	ASME Y14.5	eng	Vicking Liu	2015/11/30			ecn no	-	rel level	Released								
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2015/11/30			product family	PwrBlade+	rel level	Released								
surface	<input checked="" type="checkbox"/> linear <input type="checkbox"/> angular	appr	Pei-Ming Zheng	2015/11/30			title 12S + 2LP RA STB HEADER	dwg no 10106262-0203001	rev A	cat. no. Product - Customer Drw								
ASME Y14.5	<table border="1"> <tr> <td>0.X</td> <td>±0.5</td> </tr> <tr> <td>0.XX</td> <td>±0.25</td> </tr> <tr> <td>0.XXX</td> <td>±0.10</td> </tr> <tr> <td>0°</td> <td>±2°</td> </tr> </table>	0.X	±0.5	0.XX	±0.25	0.XXX	±0.10	0°	±2°	www.fci.com		sheet 1 of 3		PDS: Rev :A		STATUS:Released		Printed: Dec 01, 2015
0.X	±0.5																	
0.XX	±0.25																	
0.XXX	±0.10																	
0°	±2°																	

PRODUCT NO.	ROWS	S			LP		E1	1	2	3	P1	P2	E2
		HHH	GGG	FFF	EEE	LJK							
10106262-0203001LF	DCBA												

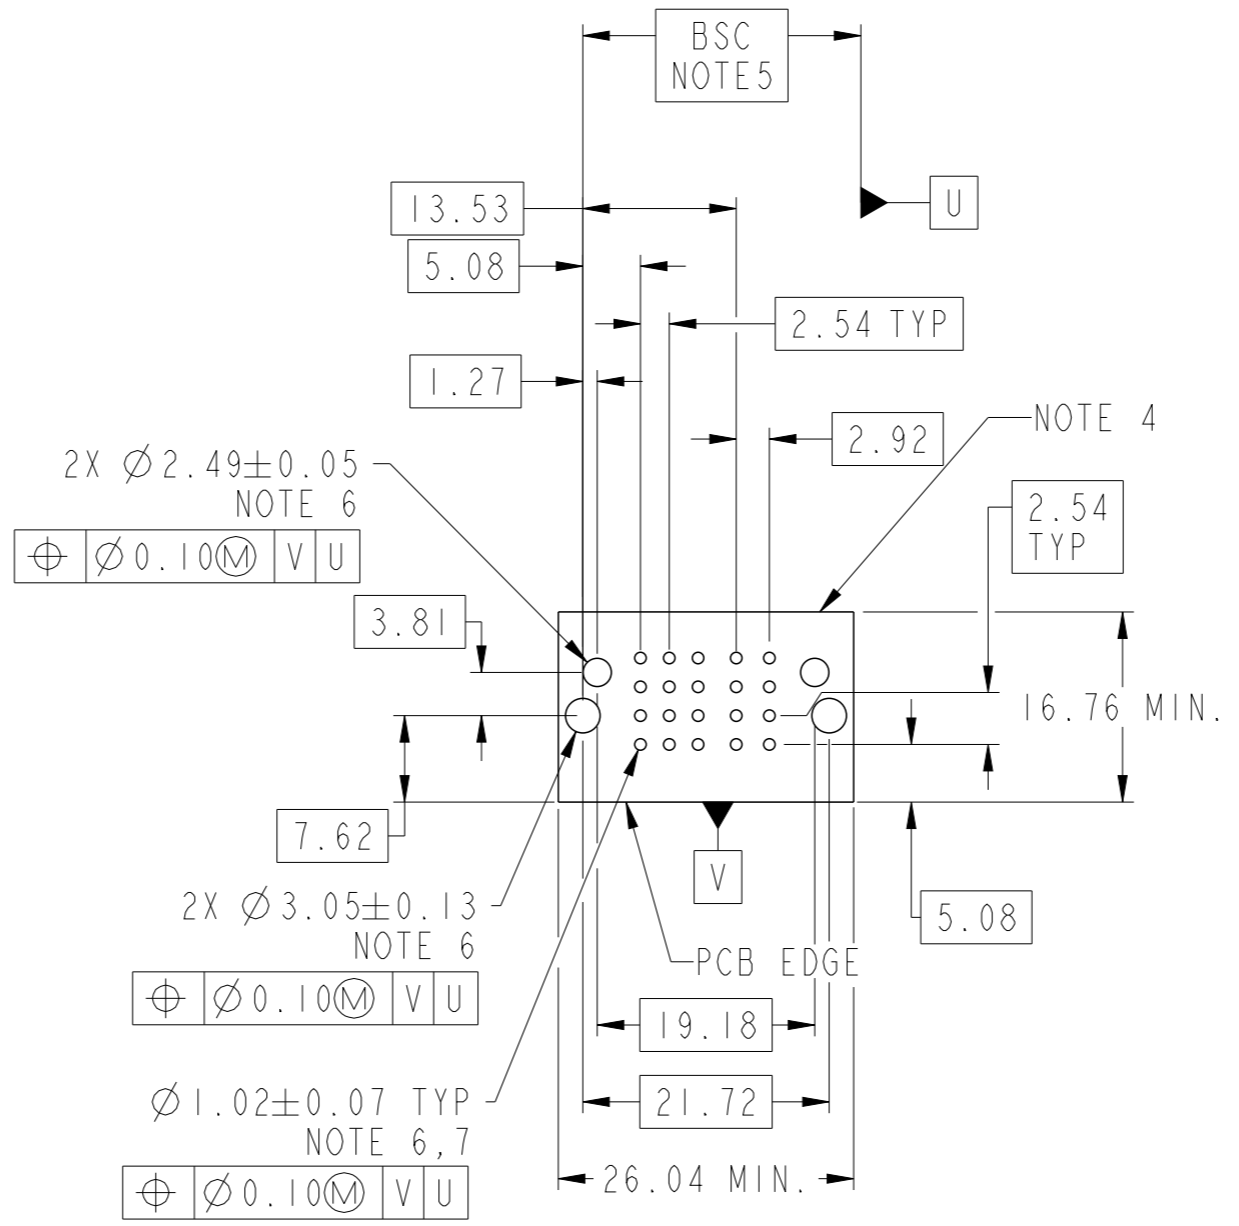

CODE	DESCRIPTION
E	MLBF SIGNAL CONTACT, ROW A (3.43)
F	MLBF SIGNAL CONTACT, ROW B (3.43)
G	MLBF SIGNAL CONTACT, ROW C (3.43)
H	MLBF SIGNAL CONTACT, ROW D (3.43)
HA	METAL HOLD DOWN
LJ	MFBL LOW POWER CONTACT (3.43)
LK	STD LOW POWER CONTACT (3.43)

dr	Vicking Liu	2015/11/09	projection	MM	size	A3	scale	3:2
eng	Vicking Liu	2015/11/30			ecn no			
chr	Fancy Zhang	2015/11/30			rel level			
appr	Pei-Ming Zheng	2015/11/30	product family	PwrBlade+	Released			
			title 12S + 2LP RA STB HEADER		dwg no 10106262-0203001		rev A	
www.fci.com			cat. no.		Product - Customer Drw			sheet 2 of 3




Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION: 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION: GS-12-658.
APPLICATION SPECIFICATION: GS-20-141.
PRODUCT PACKAGED IN TRAYS: GS-14-1502.



Copyright FCI.

dr	Vicking Liu	2015/11/09	projection 	MM 	size	A3	scale	3:2
eng	Vicking Liu	2015/11/30			ecn no	-		
chr	Fancy Zhang	2015/11/30			product family	PwrBlade+	rel level	Released
appr	Pei-Ming Zheng	2015/11/30			 title 12S + 2LP RA STB HEADER		dwg no 10106262-0203001	rev A
www.fci.com			cat. no.	Product - Customer Drw			sheet 3 of 3	