# 1-1393641-1 PENDING OBSOLESCENCE

## EUROCARD | Eurocard Type B


TE Internal #: 1-1393641-1

TE Internal Description: V42254B2202B320=PC612 FEDERLEI

View on TE.com >



Connectors > PCB Connectors > Backplane Connectors > Eurocard Connectors

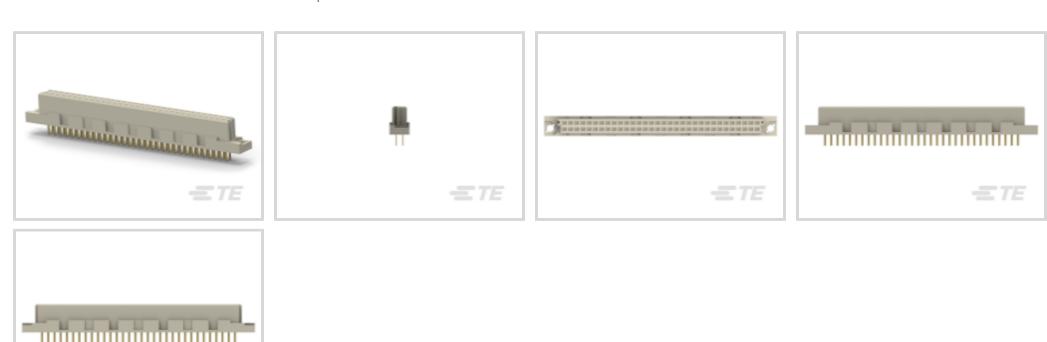

Connector & Housing Type: Receptacle

Connector System: Board-to-Board

Termination Post & Tail Length: 4.5 mm [.177 in]

Number of Positions: 32

Centerline (Pitch): 2.54 mm [.1 in]

### **Features**

## **Product Type Features**

Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
DIN Size	Half
DIN Level	II

## **Configuration Features**

Number of Positions	32
Number of Rows	2
PCB Mount Orientation	Vertical
Number of Columns	16
Number of Signal Positions	32
Rows Loaded	A, B

### **Contact Features**

PCB Contact Termination Area Plating Material Thickness	2.54 μm[100 μin]
Contact Layout	Inline



Contact Type	Socket
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	.76 μm[29.92 μin]
Contact Mating Area Plating Material	Gold Flash over Palladium Nickel
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Base Material	Phosphor Bronze
Termination Features	
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	4.5 mm[.177 in]
Mechanical Attachment	
Mating Alignment Type	Polarization
Mating Retention	Without
Mating Alignment	With
PCB Mount Alignment	Without
Panel Mount Feature	Without
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyester - GF
	Polyester - GF  2.54 mm[.1 in]
Housing Material	
Housing Material  Centerline (Pitch)	
Housing Material  Centerline (Pitch)  Dimensions	2.54 mm[.1 in]
Housing Material Centerline (Pitch)  Dimensions  Connector Length	2.54 mm[.1 in] 53.34 mm[2.1 in]
Housing Material Centerline (Pitch)  Dimensions  Connector Length  Connector Height	2.54 mm[.1 in]  53.34 mm[2.1 in]  11.51 mm[.453 in]
Housing Material  Centerline (Pitch)  Dimensions  Connector Length  Connector Height  Connector Width	2.54 mm[.1 in]  53.34 mm[2.1 in]  11.51 mm[.453 in]  8.05 mm[.317 in]
Housing Material  Centerline (Pitch)  Dimensions  Connector Length  Connector Height  Connector Width  PCB Thickness (Recommended)	2.54 mm[.1 in]  53.34 mm[2.1 in]  11.51 mm[.453 in]  8.05 mm[.317 in]  1.57 – 2.36 mm[.062 – .093 in]
Housing Material  Centerline (Pitch)  Dimensions  Connector Length  Connector Height  Connector Width  PCB Thickness (Recommended)  Row-to-Row Spacing	2.54 mm[.1 in]  53.34 mm[2.1 in]  11.51 mm[.453 in]  8.05 mm[.317 in]  1.57 – 2.36 mm[.062 – .093 in]
Housing Material Centerline (Pitch)  Dimensions  Connector Length  Connector Height  Connector Width  PCB Thickness (Recommended)  Row-to-Row Spacing  Usage Conditions	2.54 mm[.1 in]  53.34 mm[2.1 in]  11.51 mm[.453 in]  8.05 mm[.317 in]  1.57 – 2.36 mm[.062 – .093 in]  2.54 mm[.1 in]
Housing Material Centerline (Pitch)  Dimensions  Connector Length  Connector Height  Connector Width  PCB Thickness (Recommended)  Row-to-Row Spacing  Usage Conditions  Operating Temperature Range	2.54 mm[.1 in]  53.34 mm[2.1 in]  11.51 mm[.453 in]  8.05 mm[.317 in]  1.57 – 2.36 mm[.062 – .093 in]  2.54 mm[.1 in]
Housing Material Centerline (Pitch)  Dimensions  Connector Length Connector Height  Connector Width  PCB Thickness (Recommended)  Row-to-Row Spacing  Usage Conditions  Operating Temperature Range  Operation/Application	2.54 mm[.1 in]  53.34 mm[2.1 in]  11.51 mm[.453 in]  8.05 mm[.317 in]  1.57 – 2.36 mm[.062 – .093 in]  2.54 mm[.1 in]  -55 – 105 °C[-67 – 221 °F]



Compatible With Approved Standards Products	CSA LR7189, UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box & Tray, Tray

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 240°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## Compatible Parts











# Also in the Series | Eurocard Type B







# Customers Also Bought



TE Part #1367073-1 20 POS SMT CONN, SFP, 15AU




TE Part #5-2176070-3 3521 1K5 1% 2W




TE Part #3-794618-6 06P MICRO MNL ASSY R/A HDR LF



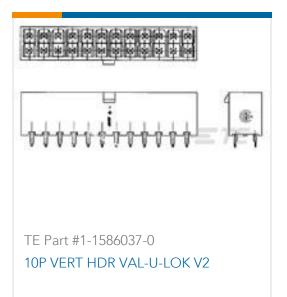





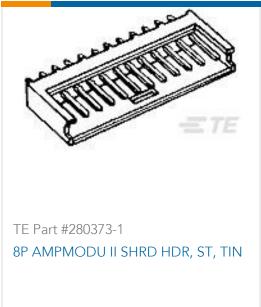





## **Documents**

### **CAD Files**

Customer View Model ENG\_CVM\_CVM\_1-1393641-1\_A.2d\_dxf.zip

English

## 3D PDF

3D

**Customer View Model** 



ENG\_CVM\_CVM\_1-1393641-1\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1393641-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.