
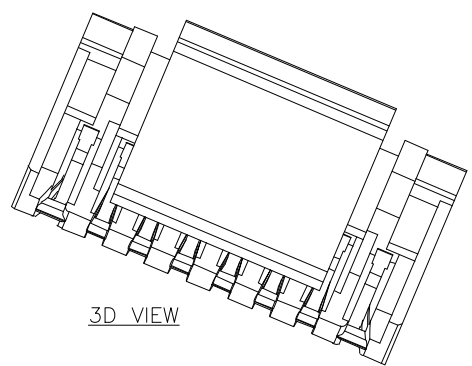
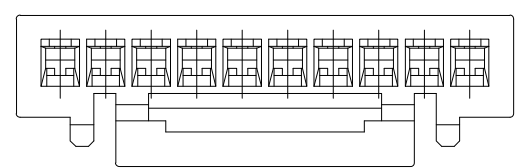
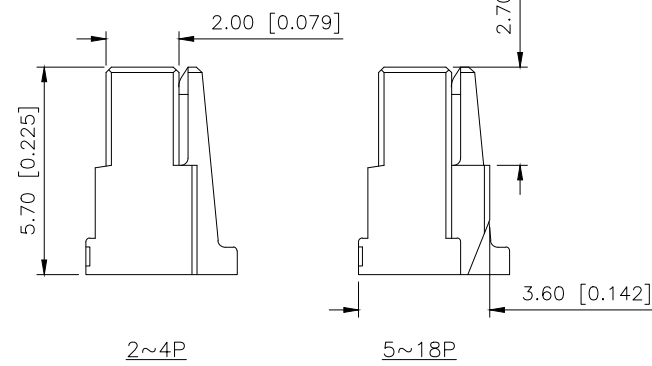
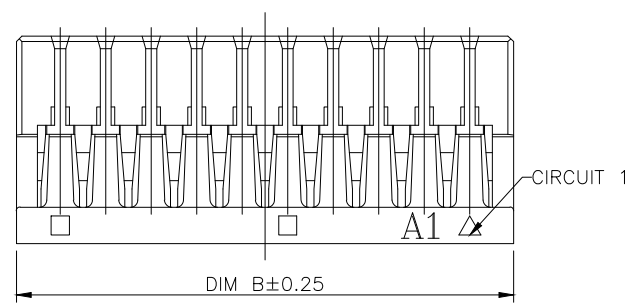


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2022.03.01	桑 葦
A1	N/A		新开模具, 尺寸发生变更	2023.08.16	桑 葦

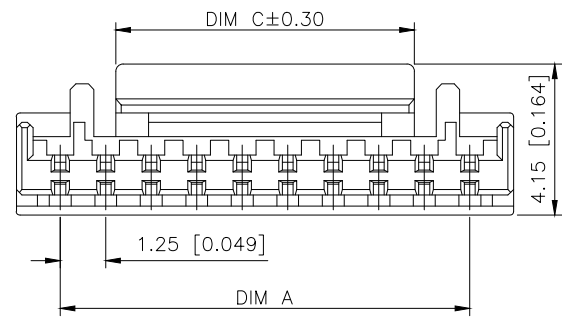

3D VIEW

Specifications(规格):
1.Voltage rating(额定电压):50V AC DC
2.Current rating(额定电流):1.0A AC/DC
3.Withstanding voltage(耐压值):≥500V AC/minute
4.Insulation resistance(绝缘电阻):100MΩ Min
5.Contact resistance(绝缘电阻):30mΩ Max
6.Temperature range(使用温度):-45℃~+125℃

PART NO.:


X1251 H-XX-N0
① ② ③ ④

- ①Series No
- ②Category:H-HSG
- ③Row No.Pin No:XX-02~18Pin
- ④Material:N0-PA66 94V0

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.25	3.65	1.90	10	11.25	13.65	8.20
03	2.50	4.90	3.10	11	12.50	14.90	
04	3.75	6.15	4.25	12	13.75	16.15	
05	5.00	7.40	4.25	13	15.00	17.40	
06	6.25	8.65	6.25	14	16.25	18.65	
07	7.50	9.90	6.25	15	17.50	19.90	
08	8.75	11.15	6.25	18	21.50	23.65	
09	10.00	12.40	6.25				

X1251H-XX-N0	PA66	AWG#26~30	X1251W	X1251T
PART NO	Material	Wire Range	Suitable XKB Wafer	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

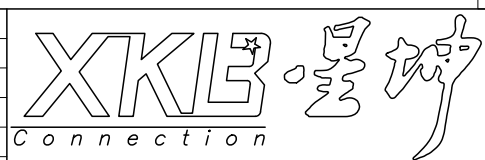

DESIGN	桑 葦	VIEW:		MODEL TYPE:	1.25mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X1251H-XX-N0
APPROVED		SIZE:	A4	DWG NO.:	