


I/O CONNECTORS

Mini I/O, 12 Position XX-9257

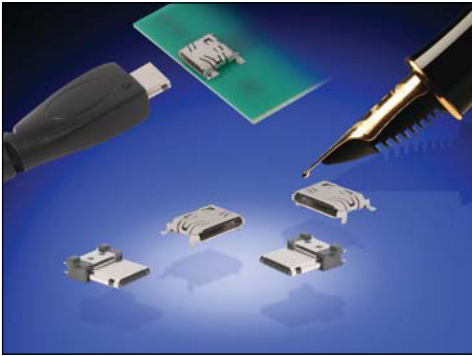

KYOCERA AVX offers the 12 way mini I/O connector as a standard product. The fixed SMT socket is designed to be mounted on a PCB and housed within a portable device. The plug is designed for cable termination with options of single and double sided contacts. Parts can be supplied as connectors only for sub contract termination, or with a custom overmold cover. The socket connector houses 12 contacts in a single row on 0.50mm pitch.

APPLICATIONS

- Medical Electronics
- Cellular Phones
- Industrial Modules
- Hand Held Devices

FEATURES AND BENEFITS

- No latching required due to the click design of the contacts.
- Optional customization of the overmold cover.
- Compact size to optimize PCB real estate.
- Metal outer cover provides integrated PCB location and solder tab.
- Positive alignment and orientation of the plug and socket.

ELECTRICAL

- Current Rating: 0.5 Amp / Contact
- Voltage Rating: 50 VAC

ENVIRONMENTAL

- Operating Temperature: -55°C to +85°C

MECHANICAL

- Insulator Material: High Temperature Plastic; UL94 V-0
- Contact Material: Phosphor Bronze (Plug)
Copper Alloy (Socket)
- Plating: Gold over Nickel
- Durability: 5,000 Cycles

HOW TO ORDER

Plug Options

| | | | | | |
|-----------|-------------|--------------|-------------------|-------------------------------|--|
| 10 | 9257 | 012 | 101 | 006 | |
| Prefix | Series | No of Ways | Contact | Contact Plating Option | |
| 10 = Plug | | 012 = 12 Way | 001 = Solder Tail | 006 = 0.25µm Gold over Nickel | |

Socket Options – Example


| | | | | | |
|-------------|-------------|--------------|-----------------------|---|-----------------------------|
| 20 | 9257 | 016 | 101 | 01 | 6 |
| Prefix | Series | No of Ways | Contact | Solder Bracket | Plating Option |
| 20 = Socket | | 012 = 12 Way | 101 = SMT Termination | 001 = Solder Bracket with Location Pegs | 3 = 0.25µm Gold over Nickel |

Certification: UL File #E90723

I/O CONNECTORS

Mini I/O, 12 Position XX-9257

9257 STANDARD 12 WAY MINI I/O PLUG

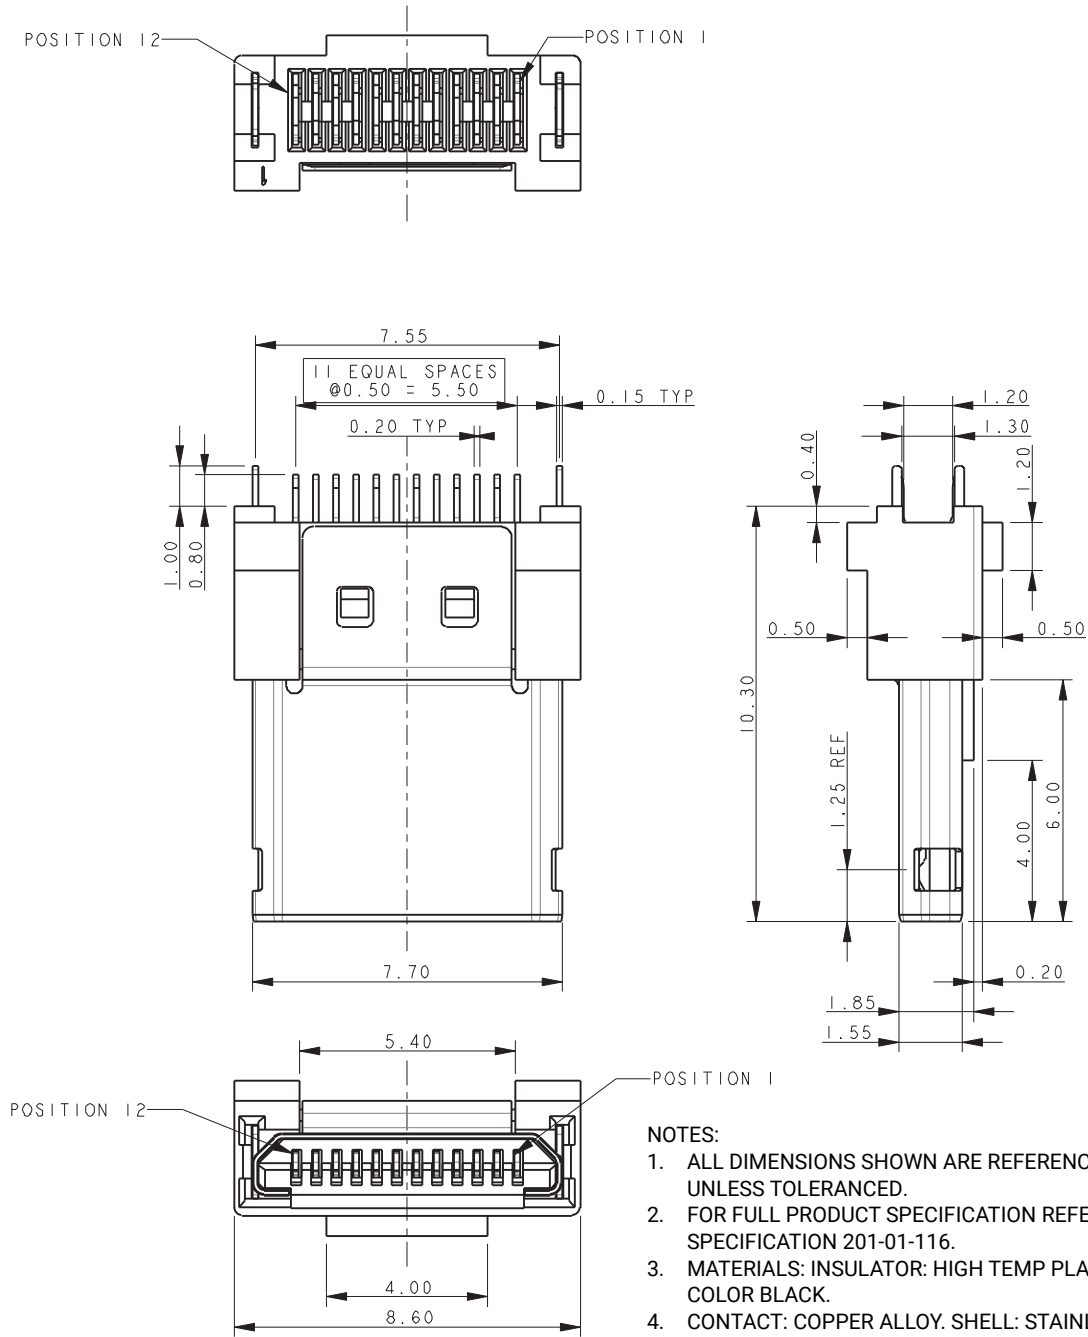

NOTES:

1. ALL DIMENSIONS SHOWN ARE REFERENCE DIMENSIONS UNLESS TOLERANCED.
2. FOR FULL PRODUCT SPECIFICATION REFER TO ELCO SPECIFICATION 201-01-116.
3. MATERIALS: INSULATOR: HIGH TEMP PLASTIC, UL94 V-0, COLOR BLACK.
4. CONTACT: COPPER ALLOY. SHELL: STAINLESS STEEL.
5. PLATING: CONTACT: GOLD OVER NICKEL. SHELL: GOLD OVER NICKEL.
6. PACKED IN TUBES, 60 PIECES PER TUBE.



PACKING DETAILS 60 PARTS PER TUBE



I/O CONNECTORS

Mini I/O, 12 Position XX-9257

SUGGESTED OVERMOULDING FOR PLUG CONNECTOR

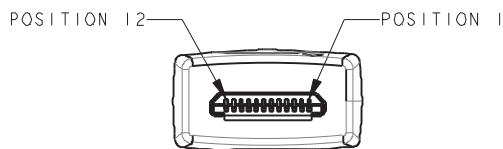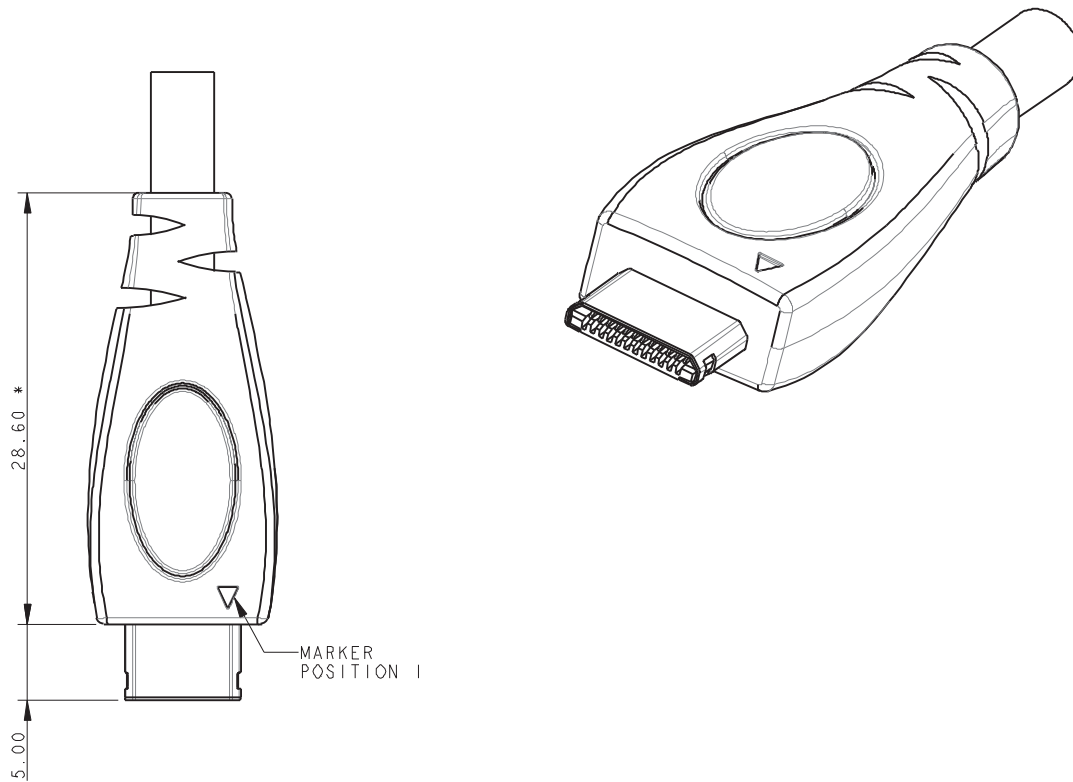


NOTES:
DIMENSIONS MARKED WITH A * ARE VARIABLE DIMENSIONS
TO SUIT CUSTOMER DESIGN AND APPLICATION

I/O CONNECTORS

Mini I/O, 12 Position XX-9257

9257 STANDARD 12 WAY MINI I/O SOCKET

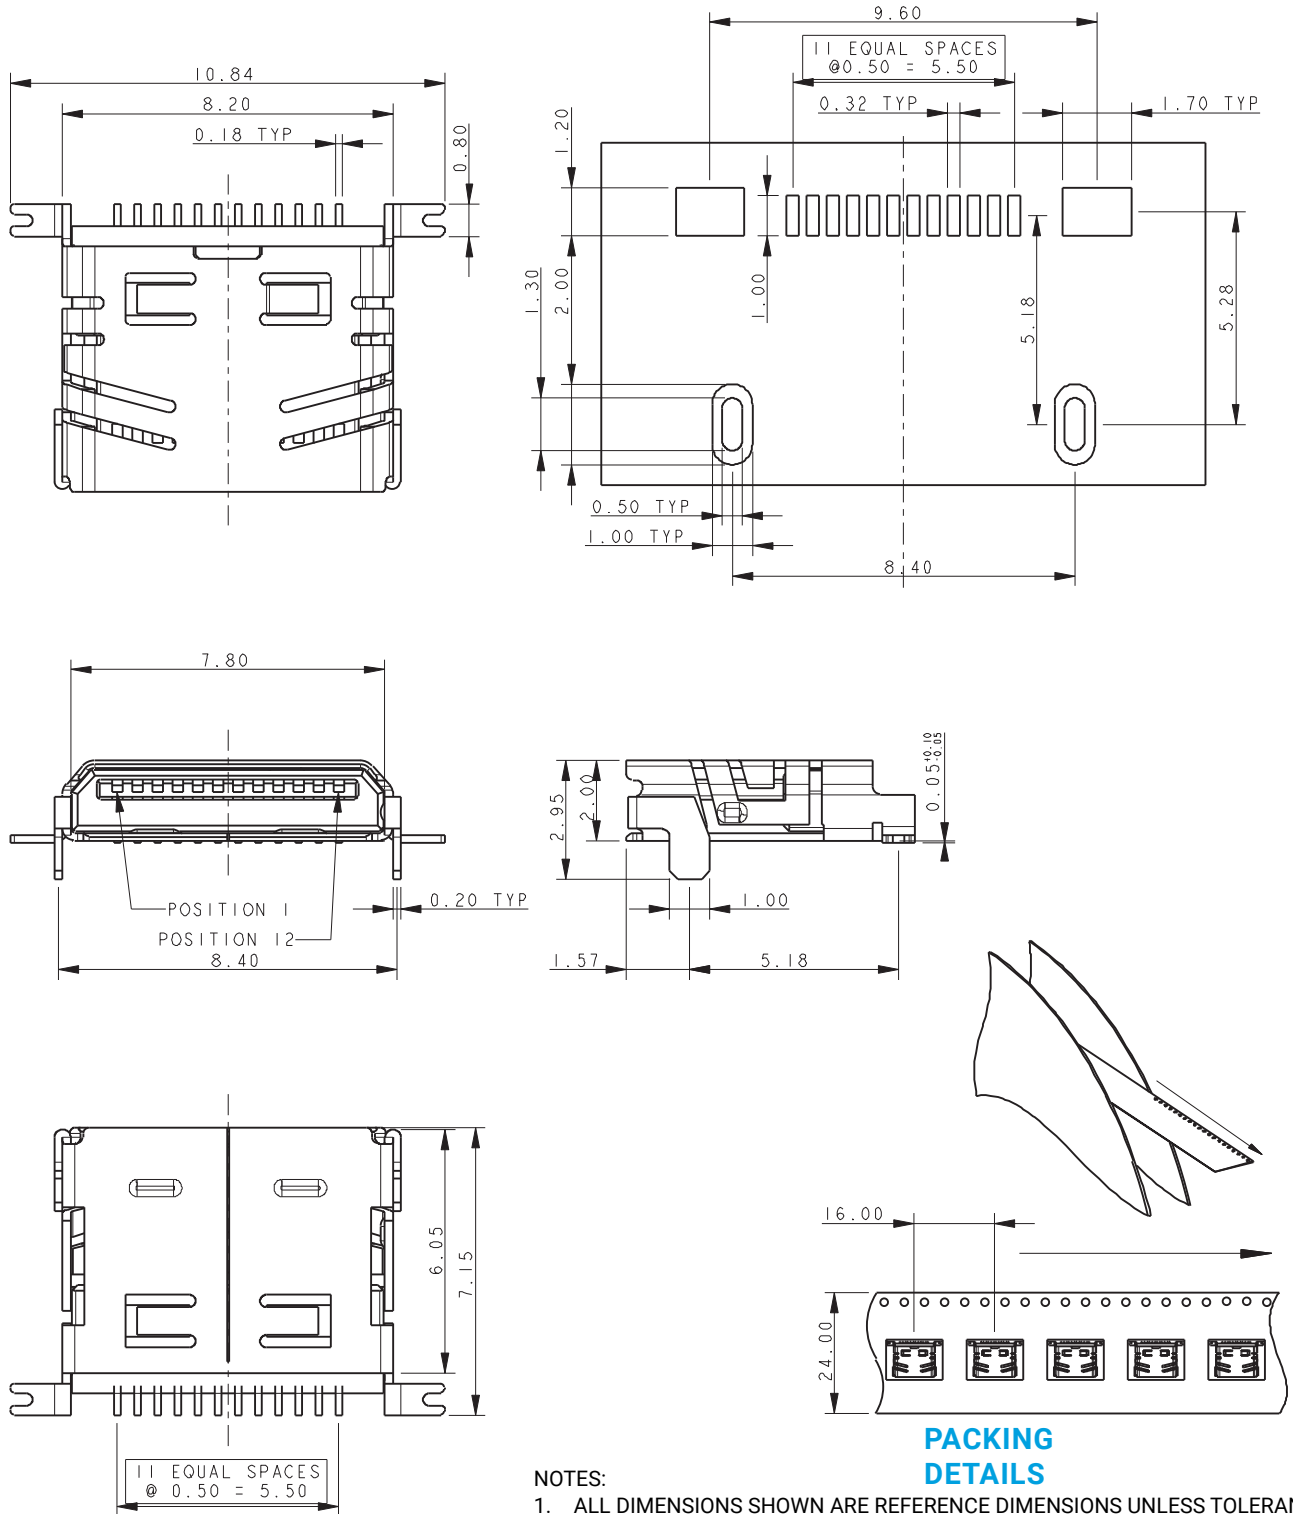

NOTES:

1. ALL DIMENSIONS SHOWN ARE REFERENCE DIMENSIONS UNLESS TOLERANCED.
2. FOR FULL PRODUCT SPECIFICATION REFER TO ELCO SPECIFICATION 201-01-116.
3. MATERIALS: INSULATOR: HIGH TEMP PLASTIC, UL94 V-O, COLOR BLACK. CONTACT: COPPER ALLOY. SHELL: STAINLESS STEEL.
4. PLATING: CONTACT: GOLD OVER NICKEL. SHELL: GOLD OVER NICKEL.
5. PACKED IN TAPE AND REEL, 1200 PIECES PER REEL.