

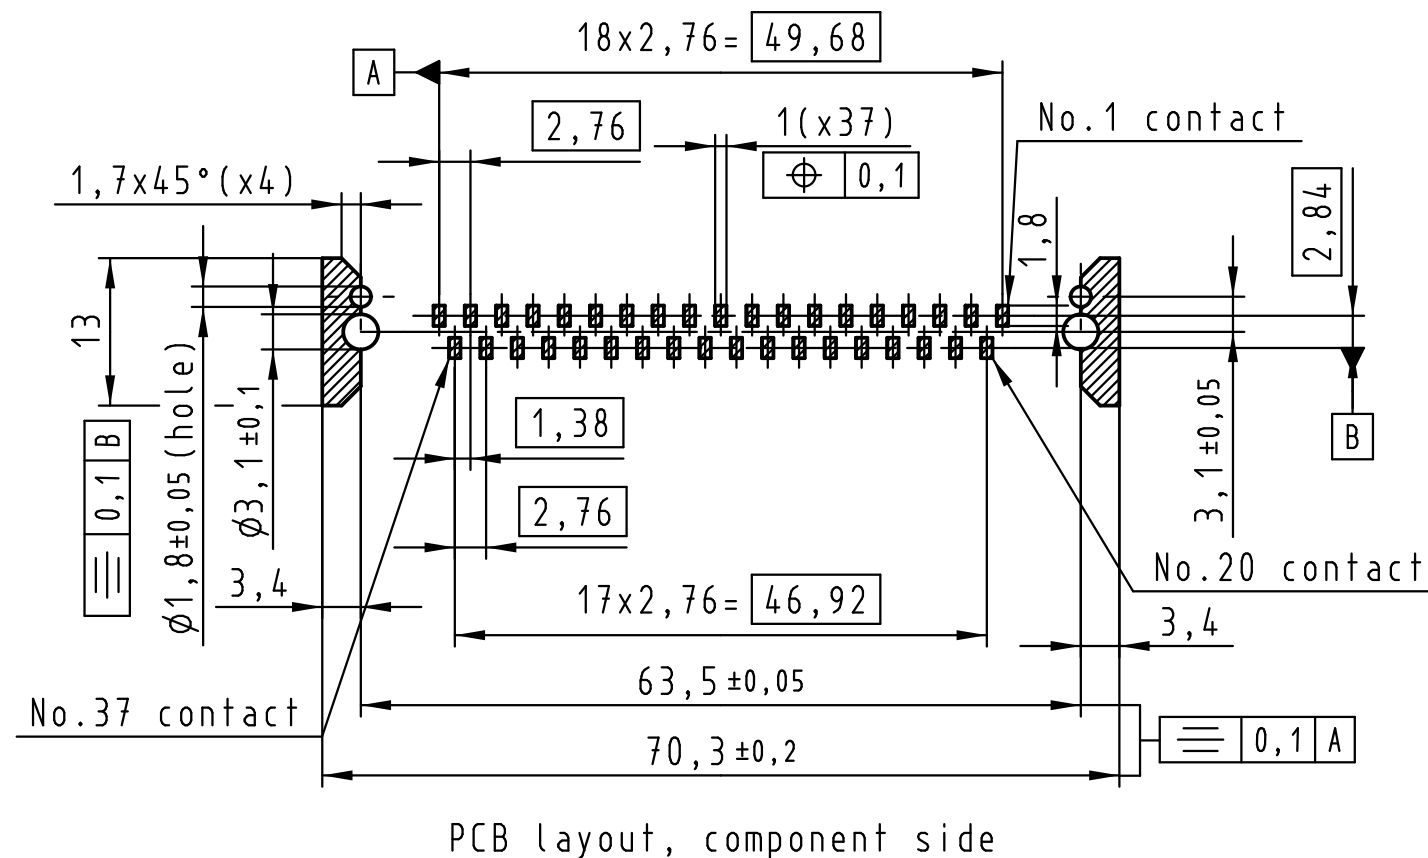
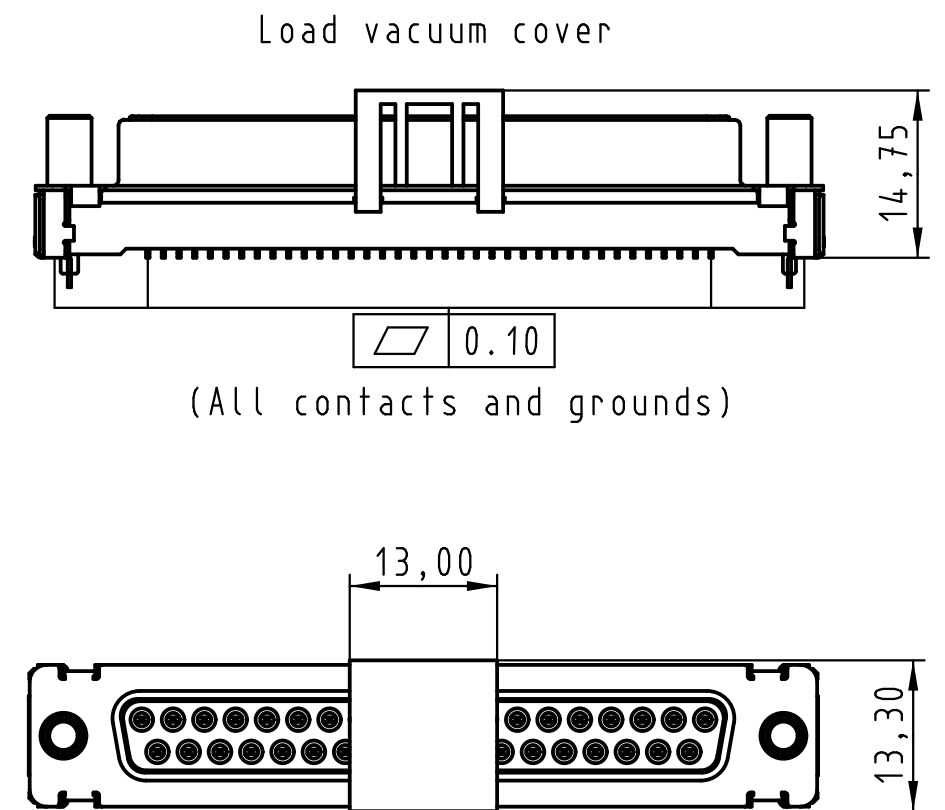



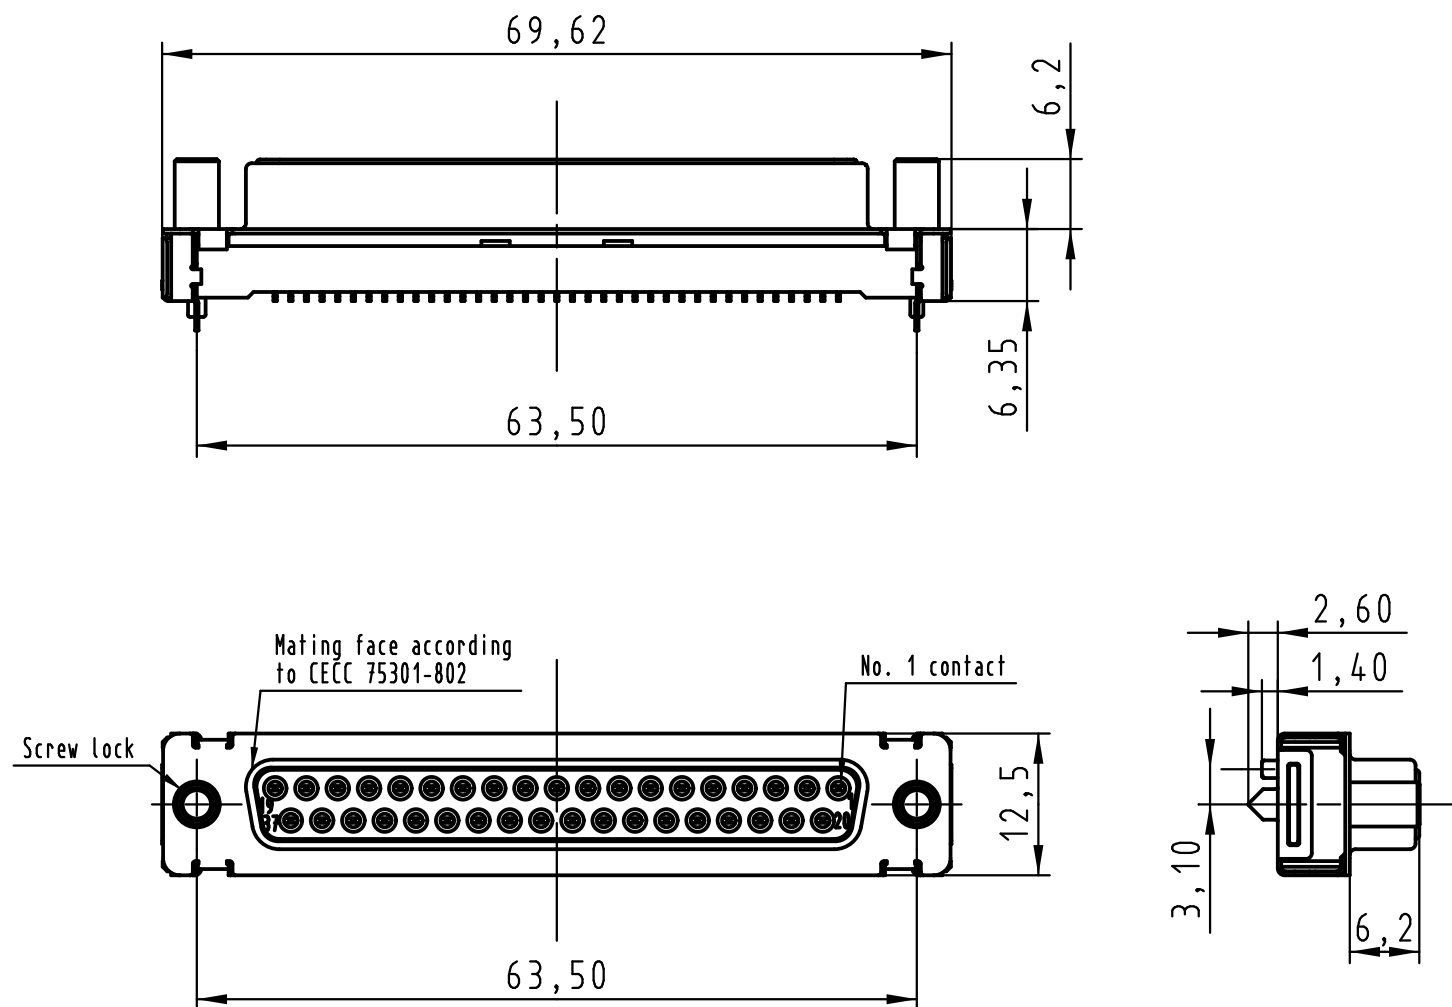


Max. Temperature: 260° during 10 seconds.

0955 455 3621 741	1	M3	Black insulator	Reel Packaging: 140 connectors (See details on page2/2)			
0955 455 3622 741	1	4-40 UNC					
0955 455 6621 741	2	M3					
0955 455 6622 741	2	4-40 UNC					
0955 455 7621 741	3	M3					
0955 455 7622 741	3	4-40 UNC					
Part number		PL	Screw lock	Index designation			
 All Dimensions in mm Original Size DIN A 3		Techn. Character.		Free size tolerances			
			Dat.	Name	Scale 1.5:1	D-Sub SMT, 37 poles Female, Straight with screw locks and ground pins	
			Detail.	25-Oct-11			Johnson.S
			Insp.	17-Nov-11			Steven.W
			Stand.	17-Nov-11			Steven.W
			Zhuhai HARTING Limited 				TB 09 55 455 x62x
EC04070	17-Nov-11	Johnson.S					
Mod.	Dat.	Name				Sub.	Page 1/2

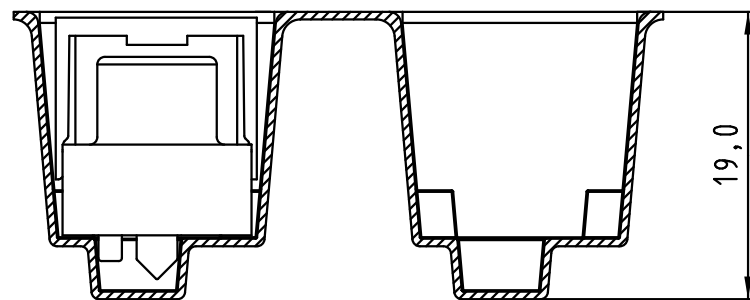


Detail A

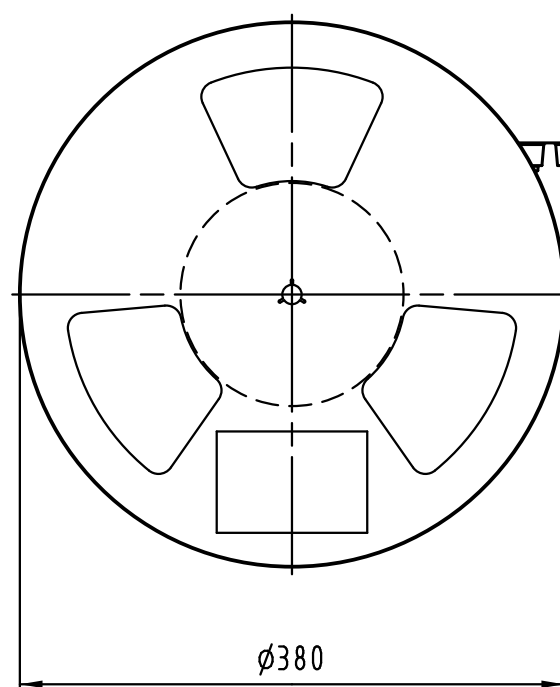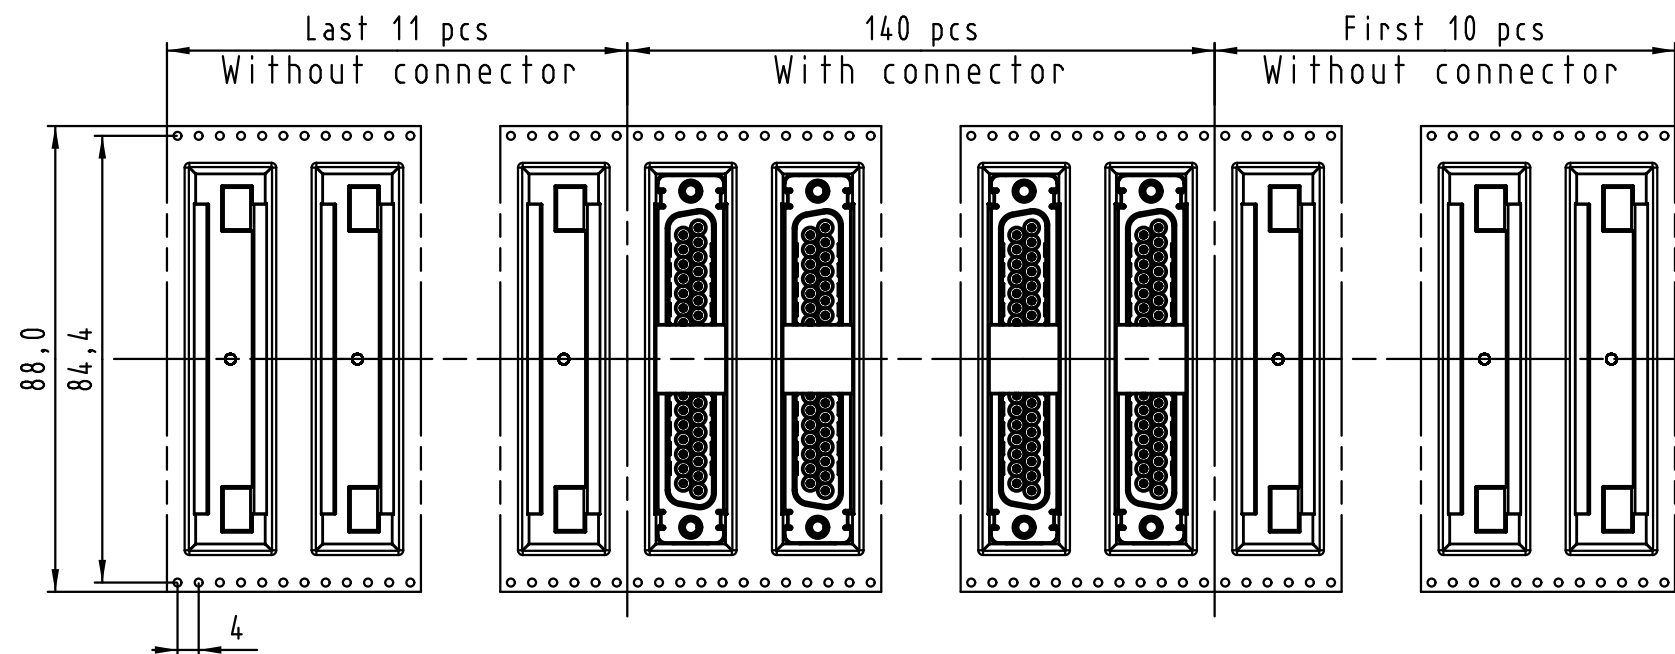

Detail A

Direction of unreeling

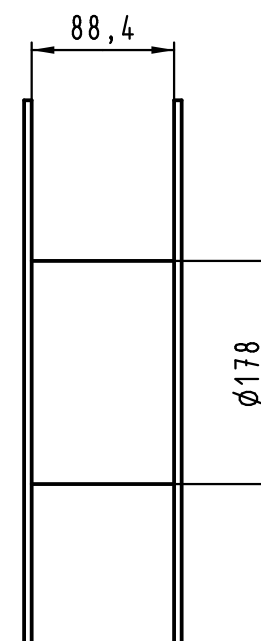

See TB 09 55 455 x62x folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2.

0955 455 3621 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 455 3622 741	1	4-40 UNC		
0955 455 6621 741	2	M3		
0955 455 6622 741	2	4-40 UNC		
0955 455 7621 741	3	M3		
0955 455 7622 741	3	4-40 UNC		
Part number	PL	Screw lock	Index designation	

 All Dimensions in mm Original Size DIN A 3			Techn. Character.			Free size tolerances			
				Dat.	Name	Scale	D-Sub SMT, 37 poles Female, Straight with screw locks and ground pins		
			Detail.	25-Oct-11	Johnson.S				
			Insp.	17-Nov-11	Steven.W				
			Stand.	17-Nov-11	Steven.W				
			Zhuhai HARTING Limited 			TB		09 55 455 x62x	Page 2/2
EC04070	17-Nov-11	Johnson.S				Sub.			
Mod.	Dat.	Name							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09554557621741](#) [09554556621741](#) [09554556622741](#) [09554557622741](#)