


● Basic Information:



Products Pic.	Catalog Numbers	Voltage Rating	Current Rating(A)	Withstand Voltage	Fuse sizes (mm)	Number of Poles	Weight & Packaging (g)	Withstand Rating RMS Symmetrical
	VRB10-CC	600V ACDC	30(UL)	3000V AC	Class CC	1	59	200kA
	VRB10-CC 3P					2 3		

- Notes: L (WITH LED)  
 a. Storage temperature: -40to +70  
 b. Storage humidity: 5% to 90%  
 c. Work temperature: -40to +85  
 d. For indoor use  
 e. Wire Range/Torque LB-IN[N-M]:  
 #6-18AWG/17.7[2.0]

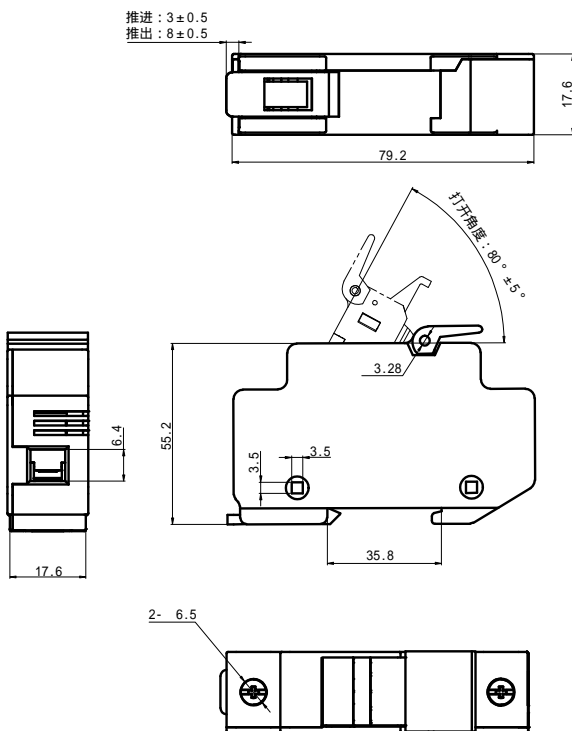


Fig.1

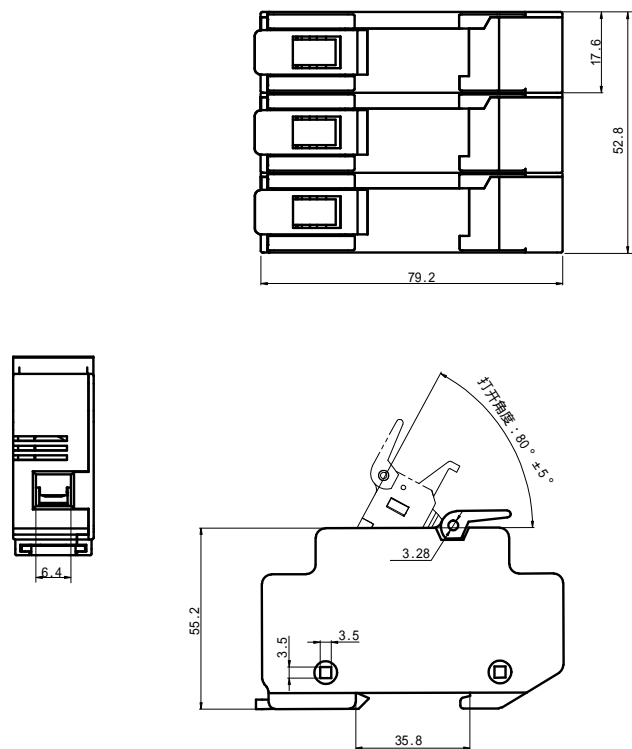


Fig.2

Catalog Numbers	Ref. Fig	Current Rating(A)	Mechanical Dimensions(mm)						
			A ± 2	B ± 2	C ± 1	D ± 1	E(Ref)	F ± 0.5	G ± 0.5
VRB10-CC(L)	1	30(UL)	shown in Fig.1						
VRB10-CC(L) 3P	2	30(UL)	shown in Fig.2						