



	<b>DIN 7981 F</b>	<b>~ISO 7049</b>		<b>450 HV</b>
---	-------------------	------------------	--	---------------


Standard withdrawn

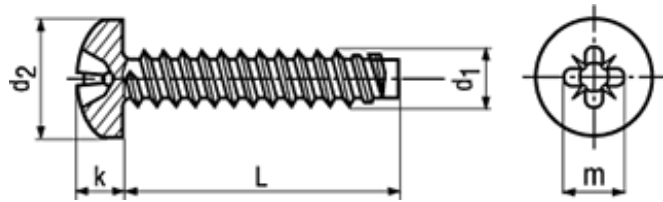

<b>BN 14065</b>
<b>Pozi pan head tapping screws</b>
form Z, with flat end type F
Steel case-hardened 450 HV
zinc plated blue
<ul style="list-style-type: none"> <li>• ~UNI 6954 B</li> <li>• ~CSN 021235</li> </ul>

**!** ISO 4042  
 Fasteners hardness  $\geq 320$  HV with electroplated coatings:  
 Susceptible to hydrogen embrittlement!  
 Further notice to residual risks can be found in the introduction section.

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k max.		m~	L
5001374	ST 2,2	4,2	1,8	1	2,4	3
2097249						4,5
2097257						6,5
5001382						8
2097265						9,5
5001366						13
5001390	ST 2,9	5,6	2,2	1	2,9	4,5
2097273						6,5
5001404						8
2097281						9,5
2097303						13
2097311						16
2097338						19
5001420	ST 3,5	6,9	2,6	2	3,9	4,5
2097346						6,5
5001439						8
2097354						9,5
2097362						13
2097370						16
2097389						19
5001412						25
2097397	(ST 3,9)	7,5	2,8	2	4,1	9,5
2097400						13
2097419						16
2097427						19

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k max.		m~	L
5001447	ST 4,2	8,2	3,05	2	4,3	6,5
5001455						8
2097435						9,5
2097443						13
2097451						16
2097478						19
2097486						25
2097494						32
5001463	ST 4,8	9,5	3,55	2	4,7	6,5
2097508						9,5
2097516						13
2097524						16
2097532						19
2097540						25
2097559						32
5001471	ST 5,5	10,8	3,95	3	6,2	13