



THIS DRAWING IS UNPUBLISHED
VERTRÄGLICHE UNVERÖFFENTLICHTE ZEICHNUNG
© COPYRIGHT 2008 BY TYCO ELECTRONICS CORPORATION.
RELEASED FOR PUBLICATION
FREI FÜR VERÖFFENTLICHUNG
2008
ALL RIGHTS RESERVED.
ALLE RECHTE VORBEHALTEN.

DATED WITH
PASSEND ZU


THE DRAWING SHOWS THE 2-DIMENSIONAL REFERENCE COMPONENT CONDITION OF THE ASSEMBLY TO IDENTIFY AND SPECIFY THE NECESSARY DIMENSIONS ONLY. THE DELIVERED PARTS MAY DEVIATE FROM THE DRAWING REGARDING THE ORIENTATION AND POSITION OF EACH COMPONENT (e.g. SLACK CABLE). SO FAR THE FUNCTIONALITY IS NOT CONCERNED.
DIE ZEICHNUNG ZEIGT DEN 2-DIMENSIONALEN IDEALZUSTAND DES ZUSAMMENBAUTEILS BEZÜGLICH DER KOMPONENTEN ZUR IDENTIFIKATION UND SPEZIFIKATION DER NOTWENDIGEN DIMENSIONEN. HINSICHTLICH DER ORIENTIERUNG UND DER LAGE DER KOMPONENTEN (z.B. BIEGESCHLAFFES KABEL) KÖNNEN DIE GELIEFERTEN TEILE VON DER ZEICHNUNG ABWEICHEN, SOFERN DIE FUNKTIONALITÄT NICHT BEEINTRÄCHTIGT IST.

PROJEKT NR.:
EGAGN06035



REVISIONS ÄNDERUNGEN		DATE	DWN	APVD
P	LTR	DESCRIPTION BESCHREIBUNG		
	AN	ADD NEW LENGTHS	24OCT2014	OS JV
	AP	ADD NEW LENGTH	09DEC2014	OS JV
	AP1	DRAFTING CLARIFICATION	28APR2016	OS JV
	AP2	INSPECTION SYMBOL UPDATED	26JAN2021	HA JV

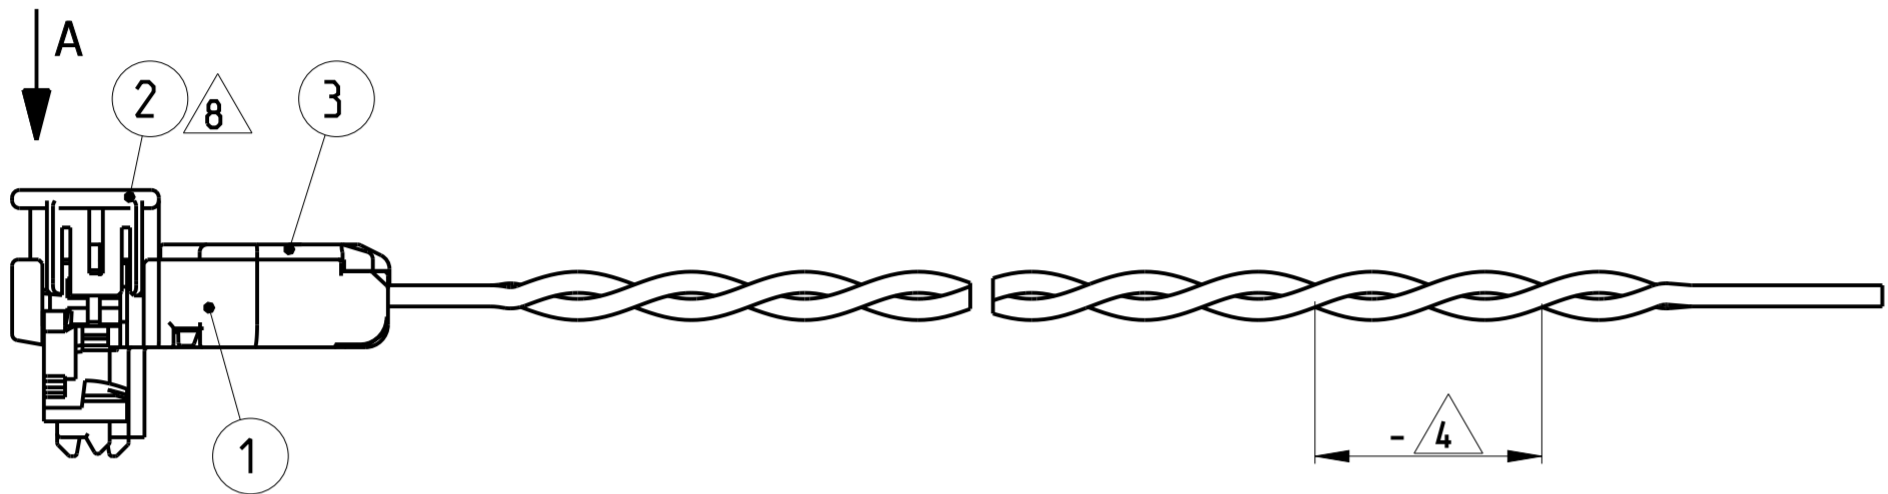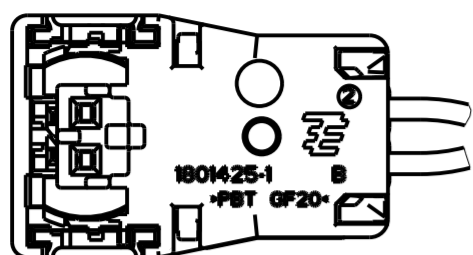

VIEW WITHOUT ITEM 2 AND 3:

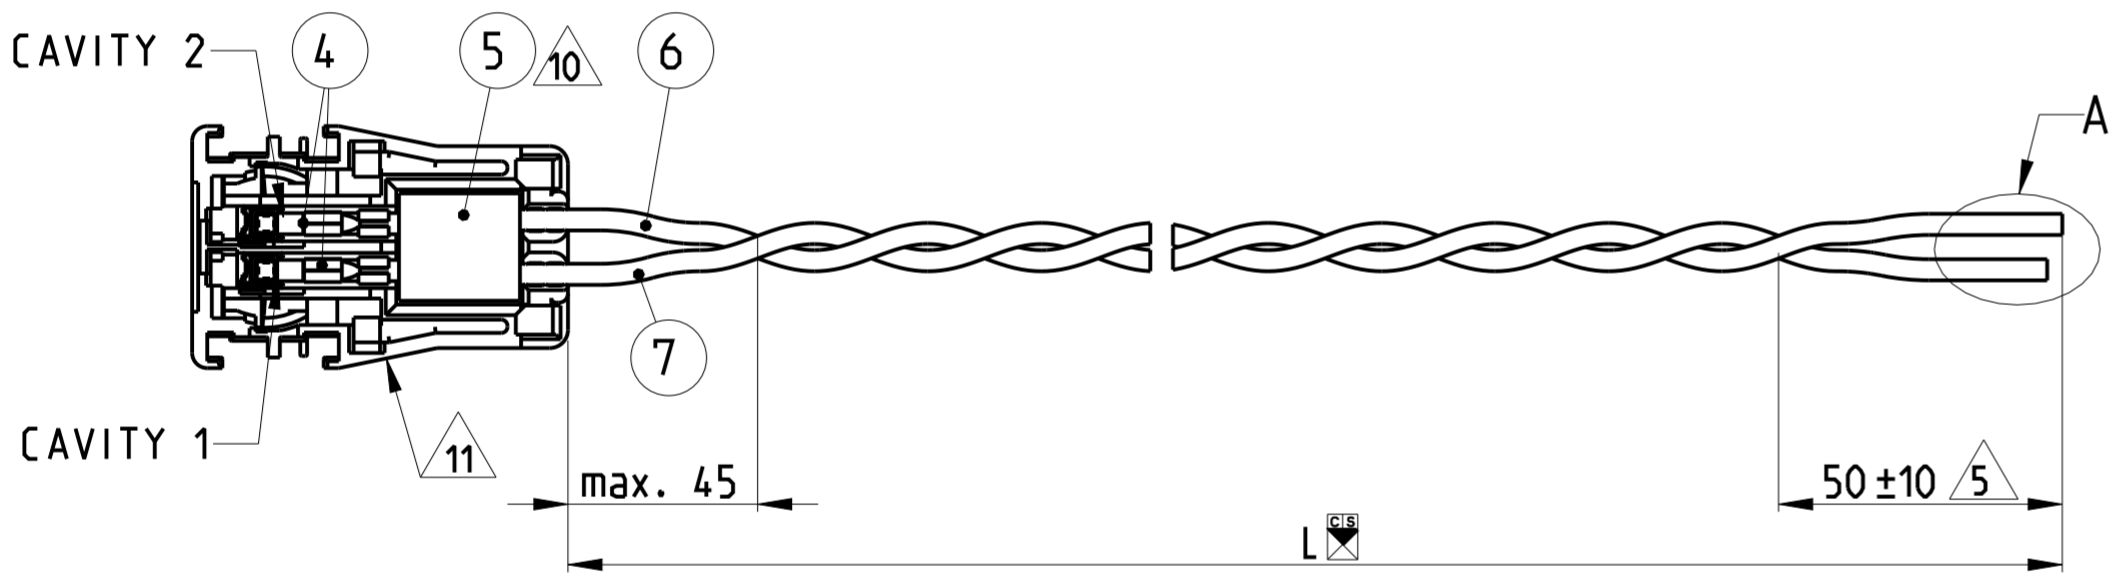

VIEW A

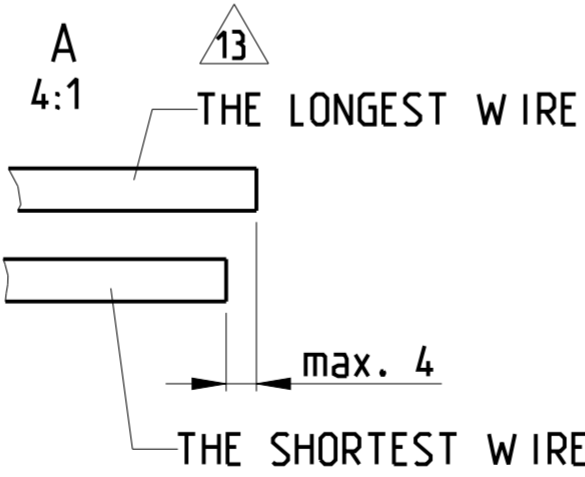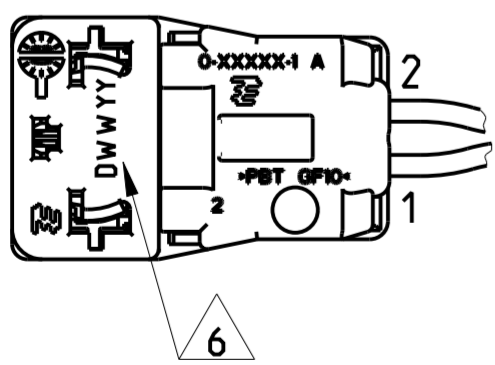

NOTES

- 1 THE PN'S COVERED UNDER THIS DRAWING ARE ACCORDING TO GENERIC DRAWING PN 1801430
- 2 THE PPAP APPROVAL OF PN 1801430 IS VALID FOR ALL PN'S COVERED IN THIS DRAWING.
- 3 FOR PACKAGING REFER TO PACKAGING INSTRUCTION V1563113
- 4 TWIST CABLE PER RENAULT SPEC. "2 WAY CONNECTOR SQUIB Ø 11". MIN. 30 TWIST/METER (FOR PITCH REFER CHAPTE 5.1)
- 5 WIRE ENDS NOT ABSOLUTELY STRAIGHT AS SHOWN.
- 6 DATE CODE MARKING ACCORDING TO DRAWING PN 1801430.
- 7 ELECTRICAL TEST ACCORDING TO TE SPEC. 108-18857:
PART 3.1.1: STANDARD CHECK ITEM a. b. c AND d.
PART 3.1.2: SPECIAL CHECK ITEM a
CHECK BUTTON IN PRE-LOCKED POSITION.
PRINT DATE CODE ON HOUSING AFTER SUCCESSFUL ELECTRICAL TEST.
- 8 CABLE ASSEMBLY SUPPLIED WITH BUTTON IN PRE-LOCKED POSITION.
- 9 CRIMP CONTACT USING CQM UNIT.
- 10 ALTERNATIVELY FERRITE WITHOUT CHAMFER CAN BE USED.
- 11 ALTERNATIVELY STAMP DOT ON ONE SIDE OF THE HOUSING COULD BE USED AFTER SUCCESSFUL ELECTRICAL TEST.
- 12 FOR GENERAL LENGTH (3500 mm, 6000 mm, 6500 mm, 7000 mm) WITH DIFFERENT CODING OF HOUSING SEE TE DRAWING 1564369
- 13 PERMITTED AXIAL STAGGERED ENDS WITHIN 4 mm

LENGTH SCHEDULE SEE SHEET 2 AND 3 OF 3 !

WIRING SCHEDULE:

CAVITY-NO.	WIRE COLOUR
1	BLUE
2	BROWN

QTY X- -Y	DESCRIPTION	ITEM NO.
7	DISCRETE WIRE, 0.50 sqmm, T3, BLUE (ACOME)	7
6	DISCRETE WIRE, 0.50 sqmm, T3, BROWN (ACOME)	6
5	FERRITE RID/KSB, WUERT	5
4	MQS SOCKET CONTACT	4
3	LID-90° LOCKABLE SQUIB CONNECTOR, WITH FERRITE FIXATION, BROWN	3
2	BUTTON-90° LOCKABLE SQUIB CONNECTOR, RED	2
1	HSG-90° LOCKABLE SQUIB CONNECTOR, CODE A, BLUE	1
-	WEIGHT OF ASSY NO. [g]	-

PRODUCT CHARACTERISTICS ACC. QMP EMEA_12 BESONDERE MERKMALE NACH QMP EMEA_12	TOLERANCING ISO 8015 TOLERIERUNG ISO 8015
DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. BEMASSUNGEN UND TOLERANZEN GEMAESS GPS (ISO STANDARDS).	
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).	
DIMENSIONS: MASSE/MASSSTAB: 1:1	TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN
0 PLC ±	1 PLC ±
1 PLC ±	2 PLC ±
2 PLC ±	3 PLC ±
3 PLC ±	4 PLC ±
ANGLES/WINKEL ±	FINISH/OBERFLÄCHE/FARBE
MATERIAL	WEIGHT GEWICHT
-	see table
-	Customer Drawing

"D" Safety System Part
Part Subject to Extended Documentation



NAME LOCKABLE SQ. CABLE ASSY. CODA	
SIZE A2	CAGE CODE 00779
DRAWING NO. ZEICHNUNGS-NR. C-1563113	RESTRICTED TO NUR FÜR
SCALE MASSSTAB 2:1	SHEET BLATT 1 OF 3
REVISION ÄNDERUNG AP2	

THIS DRAWING IS UNPUBLISHED
 VERBODEN DE VERHOFFENLICHE ZEICHNUNG
 RELEASED FOR PUBLICATION
 FREI FÜR VERÖFFENTLICHUNG
 2008
 ALL RIGHTS RESERVED.
 ALLE RECHTE VOORBEHALTEN.
 BY TYCO ELECTRONICS CORPORATION.

DATED WITH
 PASSEND ZU

THE DRAWING SHOWS THE 2-DIMENSIONAL REFERENCE COMPONENT CONDITION OF THE ASSEMBLY TO IDENTIFY AND SPECIFY THE NECESSARY DIMENSIONS ONLY. THE DELIVERED PARTS MAY DEVIATE FROM THE DRAWING REGARDING THE ORIENTATION AND POSITION OF EACH COMPONENT (e.g. SLACK CABLE). SO FAR THE FUNCTIONALITY IS NOT CONCERNED.

DIE ZEICHNUNG ZEIGT DEN 2-DIMENSIONALEN IDEALZUSTAND DES ZUSAMMENBAUTEILS BEZÜGLICH DER KOMPONENTEN ZUR IDENTIFIKATION UND SPEZIFIKATION DER NOTWENDIGEN DIMENSIONEN. HINSICHTLICH DER ORIENTIERUNG UND DER LAGE DER KOMPONENTEN (z.B. BIEGESCHLAPPE KABEL) KÖNNEN DIE DELIVERTEN TEILE VON DER ZEICHNUNG ABWEICHEN, SOFERN DIE FUNKTIONALITÄT NICHT BEEINTRÄCHTIGT IST.

PROJKT NR.:
 EGAGN06035

REVISIONS

AMENDMENT	DESCRIPTION	DATE	DWN	APVD
P	LTR			
-	SEE SHEET 1	-	-	-

LENGTH SCHEDULE:

TE PART NO.	REV.	LENGTH L [mm]	TOL. [mm]	WEIGHT [g/pc] (±3g)	QTY/BOX [pcs]	RENAULT REF. NO.
1563113-1	C	1700	+20	23.0	250	8200963779
1563113-2	C	1970	+20	26.1	250	
1563113-3	C	1560	+20	21.4	250	
1563113-4	C	4280	+30	52.8	100	
1563113-5	C	2890	+20	36.8	150	
1563113-6	C	3560	+20	44.5	100	
1563113-7	C	2900	+20	36.9	150	
1563113-8	C	2870	+20	36.5	150	
1563113-9	C	1670	+20	22.7	250	
1-1563113-0	C	4520	+30	55.6	100	
1-1563113-1	C	1520	+20	20.9	250	
1-1563113-2	C	1630	+20	22.2	250	
1-1563113-3	E	1455	+20	20.2	300	
1-1563113-4	C	1605	+20	21.9	250	
1-1563113-5	C	1710	+20	23.1	250	
1-1563113-6	C	1720	+20	23.2	250	
1-1563113-7	C	1760	+20	23.7	250	
1-1563113-8	C	1810	+20	24.3	250	
1-1563113-9	C	1850	+20	24.7	250	
2-1563113-0	C	1570	+20	21.5	250	
2-1563113-1	C	2000	+20	26.5	250	
2-1563113-2	C	3410	+20	42.8	100	
2-1563113-3	C	4800	+30	58.8	100	
2-1563113-4	C	4600	+30	56.5	100	
2-1563113-5	C	3240	+20	40.8	150	
2-1563113-6	C	3300	+20	41.5	150	
2-1563113-7	C	3340	+20	42.0	150	
2-1563113-8	C	2410	+20	31.2	150	
2-1563113-9	C	3030	+20	38.4	150	
3-1563113-0	C	4630	+30	56.9	100	
3-1563113-1	E	4570	+30	56.2	100	
3-1563113-2	C	4680	+30	57.4	100	
3-1563113-3	C	2225	+20	29.1	150	
3-1563113-4	C	1500	+20	20.7	300	
3-1563113-5	C	3255	+20	41.0	150	
3-1563113-6	C	1820	+20	24.4	250	
3-1563113-7	C	3360	+20	42.2	150	
3-1563113-8	C	4320	+30	53.3	100	
3-1563113-9	C	3145	+20	39.7	150	
4-1563113-0	C	1640	+20	22.3	250	

TE PART NO.	REV.	LENGTH L [mm]	TOL. [mm]	WEIGHT [g/pc] (±3g)	QTY/BOX [pcs]	RENAULT REF. NO.
4-1563113-1	C	1730	+20	23.4	250	8200963779
4-1563113-2	C	1615	+20	22.0	250	
4-1563113-3	C	4230	+30	52.2	100	
4-1563113-4	D	705	+20	11.5	300	
4-1563113-5	C	4150	+30	51.3	100	
4-1563113-6	C	2260	+20	29.5	150	
4-1563113-7	C	3450	+20	43.2	150	
4-1563113-8	B	1930	+20	25.7	250	
4-1563113-9	B	2800	+20	35.7	150	
5-1563113-0	B	4120	+30	51.0	100	
5-1563113-1	B	1800	+20	24.2	250	
5-1563113-2	B	1140	+20	16.5	300	
5-1563113-3	D	6480	+30	78.2	100	
5-1563113-4	D	2920	+20	37.1	150	
5-1563113-5	B	1480	+20	20.5	300	
5-1563113-6	B	6780	+30	81.7	100	
5-1563113-7	D	2100	+20	27.6	150	
5-1563113-8	C	870	+20	13.4	300	
5-1563113-9	C	1900	+20	25.3	250	
6-1563113-0	A	6860	+30	82.6	100	
6-1563113-1	A	1890	+20	25.2	250	
6-1563113-2	A	1460	+20	20.2	300	
6-1563113-3	B	1010	+20	15.0	300	
6-1563113-4	A	1580	+20	21.6	250	
6-1563113-5	B	1870	+20	25.0	250	
6-1563113-6	A	1450	+20	20.1	300	
6-1563113-7	B	3800	+20	47.3	100	
6-1563113-8	B	955	+20	14.4	300	
6-1563113-9	B	1220	+20	17.5	300	

LENGTH SCHEDULE CONTINUE ON SHEET 3 !

PRODUCT CHARACTERISTICS ACC. QMP EMEA_12 BESONDERE MERKMALE NACH QMP EMEA_12		TOLERANCING ISO 8015 TOLERIERUNG ISO 8015	
DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. BEMASSUNGEN UND TOLERANZEN GEMAEISS GPS (ISO STANDARDS).			
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).		DWN M. Zelch CHK J. Vais APVD R. Hort	18 JUN 2008 18 JUN 2008 20 JUN 2008
DIMENSIONS: MASSE/WEITER: [mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN	PRODUCT SPEC 108-18954	NAME LOCKABLE SQ. CABLE ASSY. CODA
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ±	APPLICATION SPEC 114-18231-1	SIZE A2
MATERIAL	ANGLES/WINKEL ± FINISH/OBERFLÄCHE/FARBE	WEIGHT GEWICHT see table	CAGE CODE 00779
		Customer Drawing	DRAWING NO. ZEICHNUNGS-NR. C-1563113
			RESTRICTED TO NUR FÜR -
			SCALE MASSSTAB 2:1
			SHEET BLATT 2 OF VON 3
			REV AP2

THIS DRAWING IS UNPUBLISHED
 VERTRAULICHE UNVERÖFFENTLICHTE ZEICHNUNG
 RELEASED FOR PUBLICATION
 FREI FÜR VERÖFFENTLICHUNG
 2008
 ALL RIGHTS RESERVED.
 ALLE RECHTE VORBEHALTEN.
 BY TYCO ELECTRONICS CORPORATION.

DATED WITH
 PASSEMO ZU:

THE DRAWING SHOWS THE 2-DIMENSIONAL REFERENCE COMPONENT CONDITION OF THE ASSEMBLY TO IDENTIFY AND SPECIFY THE NECESSARY DIMENSIONS ONLY. THE DELIVERED PARTS MAY DEVIATE FROM THE DRAWING REGARDING THE ORIENTATION AND POSITION OF EACH COMPONENT (e.g. SLACK CABLE). SO FAR THE FUNCTIONALITY IS NOT CONCERNED.


DIE ZEICHNUNG ZEIGT DEN 2-DIMENSIONALEN IDEALZUSTAND DES ZUSAMMENBAUTEILS BEZÜGLICH DER KOMPONENTEN ZUR IDENTIFIKATION UND SPEZIFIKATION DER NOTWENDIGEN DIMENSIONEN. HINSICHTLICH DER ORIENTIERUNG UND DER LAGE DER KOMPONENTEN (z.B. BIEGESCHLAPFES KABEL) KÖNNEN DIE GELIEFERTEN TEILE VON DER ZEICHNUNG ABWEICHEN, SOFERN DIE FUNKTIONALITÄT NICHT BEEINTRÄCHTIGT IST.

PROJKT NR.:
 EGAGN06035

REVISIONS				
NO.	DESCRIPTION	DATE	DWN	APVD
-	SEE SHEET 1	-	-	-

LENGTH SCHEDULE:

TE PART NO.	REV.	LENGTH L [mm]	TOL. [mm]	WEIGHT [g/pc] (±3g)	QTY/BOX [pcs]	RENAULT REF. NO.
7-1563113-0	B	220	+10	5.9	540	8200963779
7-1563113-1	D	730	+20	11.8	300	
7-1563113-2	D	1240	+20	17.7	300	
7-1563113-3	C	1025	+20	15.2	300	
7-1563113-4	B	1090	+20	16.0	300	
7-1563113-5	A	850	+20	13.2	300	
7-1563113-6	A	630	+20	10.7	300	
7-1563113-7	A	2000	±10	26.4	250	
7-1563113-8	A	1660	+20	22.6	250	
7-1563113-9	A	1740	+20	23.5	250	
8-1563113-0	A	1050	+20	15.5	300	
8-1563113-1	A	1335	+20	18.8	300	
8-1563113-2	A	1245	+20	17.8	300	
8-1563113-3	A	3185	+20	40.2	150	
8-1563113-4	B	4950	+30	60.6	100	
8-1563113-5	A	2555	+20	32.9	150	
8-1563113-6	A	4915	+30	60.1	100	
8-1563113-7	A	4830	+30	59.2	100	
8-1563113-8	A	4380	+30	54.0	100	
8-1563113-9	A	1330	+20	18.7	300	
9-1563113-2	A	3880	+20	48.2	100	
9-1563113-3	A	3900	+20	48.4	100	
9-1563113-4	A	3480	+20	43.6	150	
9-1563113-5	A	4463	+30	54.9	100	
9-1563113-6	A	4040	+30	50.0	100	
9-1563113-7	A	5205	+30	63.5	100	
9-1563113-8	A	4660	+30	57.2	100	
9-1563113-9	A	3750	+20	46.7	100	

PRODUCT CHARACTERISTICS ACC. QMP EMEA_12 BESONDERE MERKMALE NACH QMP EMEA_12		TOLERANCING ISO 8015 TOLERIERUNG ISO 8015	
DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. BEMASSUNGEN UND TOLERANZEN GEMAESS GPS (ISO STANDARDS).			
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).		DWN M. Zelch 18 JUN 2008	
		CHK J. Vais 18 JUN 2008	
		APVD R. Hort 20 JUN 2008	
DIMENSIONS: MASSSTAB: 1:1		TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN	
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES/WINKEL ± FINISH/OBERFLÄCHE/FARBE -	
MATERIAL -		PRODUCT SPEC 108-18954	
		APPLICATION SPEC 114-18231-1	
		WEIGHT see table	
		Customer Drawing	

STE TE Connectivity	
NAME LOCKABLE SQ. CABLE ASSY. CODA	
SIZE A2	CAGE CODE 00779
DRAWING NO. C-1563113	RESTRICTED TO MUR FUER -
SCALE MASSSTAB 2:1	SHEET BLATT 3 OF VON 3
REV AP2	