


## GRM1851X1H222JA44#

Complies with RoHS Reflow OF Recommended

< List of part numbers with package codes >

 $\mathsf{GRM1851X1H222JA44D}\ ,\ \mathsf{GRM1851X1H222JA44J}\ ,\ \mathsf{GRM1851X1H222JA44B}$ 

## Shape

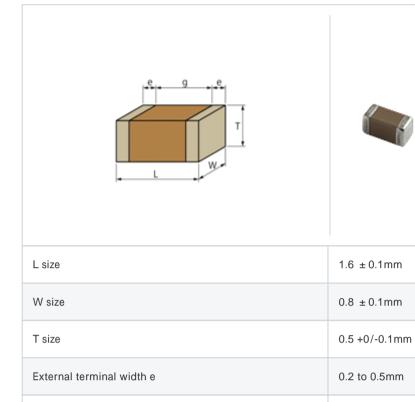

References			
Packaging	Specifications	Minimum quantity	
D	Paper tape ( 180mm)	4000	
J	Paper tape ( 330mm)	10000	
В	Packing in bulk	1000	

"#" indicates a package specification code.

Mass (typ.)	
1 piece	3mg
Reel ( 180mm)	100g

## Specifications

Size code in mm(inch)

Distance between external terminals g (Min.)

Capacitance	2200pF ±5%
Rated voltage	50Vdc
Temperature characteristics (complied standard)	SL(JIS)
Temperature coefficient	+350 to -1000ppm/
Temperature range of temperature characteristics	20 to 85
Operating temperature range	-55 to 125

## 🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

0.5mm

1608 (0603)



URL : http://www.murata.co.jp/

Last updated: 2013/03/08