


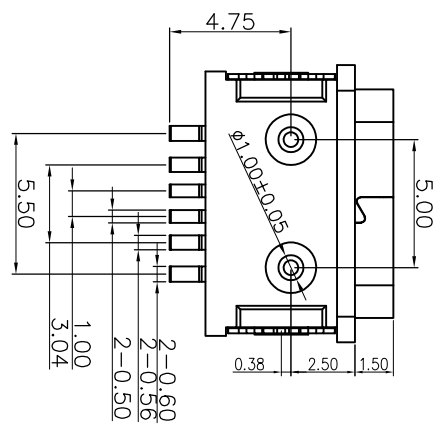

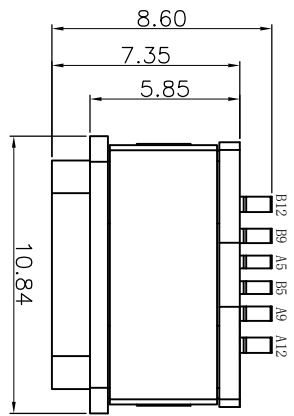


CUSTOMER


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

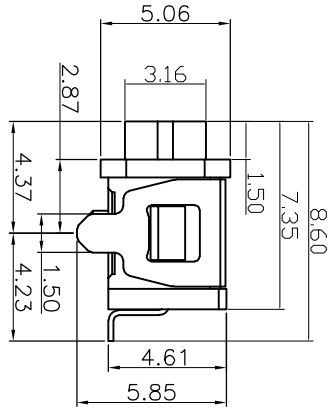

1. 材料: 黑色硅胶, 符合ROHS环保管理物质.
建议防水圈



- 备注:
- 1.1 材质: LCP+30%G.F
 - 1.2 端子: H65, T=0.20mm: 铆底, 镀金"U"
 - 1.3 外壳: 不锈钢, T=0.30mm: 表面镀锌
 2. 主要特性:
 - 2.1 额定电流: 3.0A
 - 2.2 接触阻抗: 40mΩ MAX
 - 2.3 绝缘阻抗: 100MΩ MIN 250V DC
 - 2.4 耐压测试: 100V AC
 - 2.5 沾锡性: 温度265+/-5℃, 时间5+/-0.5s
 - 2.6 整体插入力: 2.0kgf MAX
 - 2.7 使用寿命: 5000次
 - 2.8 工作温度: -30℃~+80℃

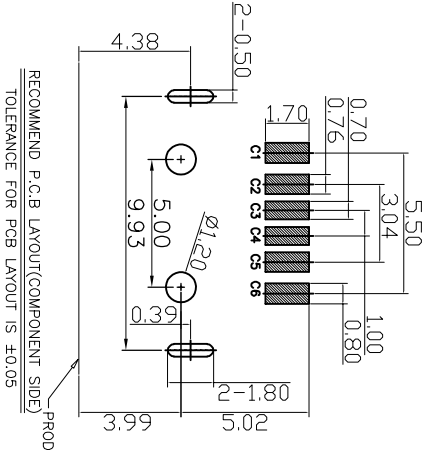

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

TOLERANCE	NAME(INTENDED USE)	DRAWG NO. FY23-017TC61F1735-01
X.X ±0.30 X.° ±10°	CUSTOMER DRAWING	
.XX ±0.20 X.° ±8°	PART NO.	TITLE: CF 6P防水七级板上两脚7.5L
.XXX ±0.10 .XX° ±5°	DESIGN: ZXM	SCALE SHEET REV. 1:1 1/2 A
UNITS mm	CHED:	APPD:
MATERILA		
FINISH		

FUYOU 广东富盈兴业精密科技实业有限公司
Guangdong FUYOU Precision Electronic Technology Co.,LTD.

