

## SPECIFICATIONS

Rated(额定参数): 300V,10A  
 Dielectric strength(抗电强度): AC1500V/1 Minute  
 Insulation Resistance(绝缘电阻):1000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Temp. range(操作温度): -40℃~+105℃  
 MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)  
 Contact(端子): Brass, Tin plating(黄铜镀锡)

PITCH RANGE IN MM	NOMINAL DIMENSION RANGE IN MM					
	OVER 6	OVER 10	OVER TO 24	OVER 30	OVER TO 60	OVER TO 100
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70
						±1.00

## Ordering Information

JL 396V - 396 XX X X 1




Pitch  
396=3.96PH


No. of pins  
2P~20P

Housing Color  
B=Black  
G=Green  
U=Blue  
R=Red  
W=White  
Y=Yellow  
O=Orange  
E=Grey

Packing  
O=Pe  
bog  
A=Tray  
T=Tube

Recommended P.C.B Layout

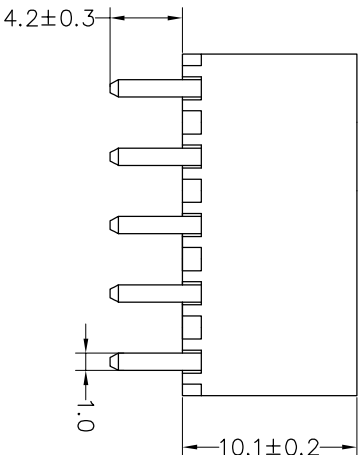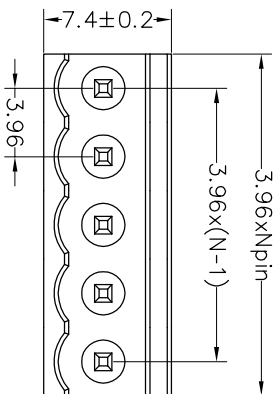

OPERATION		DRAW	SCALE	FIT	PART NO.	
XX	±0.30	yiyusheng	UNIT	mm	JL396V-396XXXX1	
X:XX	±0.20	CHECK	SIZE	A4	3.96mm Pitch Male	
X:XXX	±0.10	APPROVE	SHEET	1/1	Pluggable Terminal Blocks	
Angle	±3°		PROU.			
DIM	TOL					
CHANGE						
1	2	3	4	5	6	7
REV	DATE	MODIFICATION DESCRIPTION				
A0	2019.05.05	NEW DRAWING				
1						

**JILIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992