
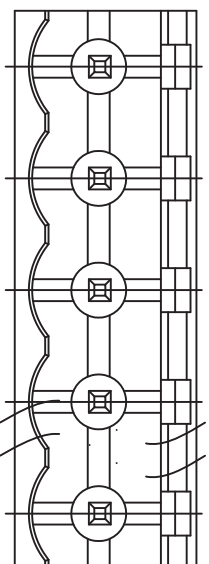


SECTION:A-A

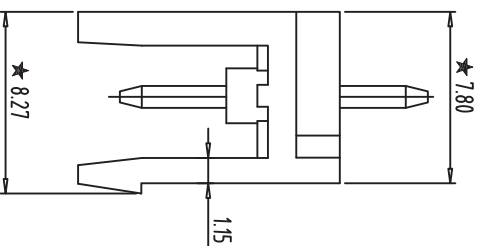

- NOTES:
1. Rating:300V 15A ;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40°C~+105°C
 5. "★" is the important dimension
 6. RoHS compliance

Total Pitch Tolerances		Nominal dimension range																																																
In mm		In mm																																																
0	over	0	over	30	over	53	over	70	over	90	over	115	over	150	over	250	over	350	over	0	over	30	over	53	over	70	over	90	over	115	over	150	over	200	over	250	over	0	over	10	over	100	over	150	over					
±0.18	to	±0.20	to	±0.25	to	±0.3	to	±0.35	to	±0.44	to	±0.50	to	±0.60	to	±0.70	to	±0.85	to	±0.20	to	±0.25	to	±0.30	to	±0.35	to	±0.44	to	±0.55	to	±0.70	to	±0.80	to	±0.90	to	0.2	to	0.3	to	0.3	to	0.2	to	0.3	to	0.3	to	0.5

REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014/08/19

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	SK	DATE 2014/08/19	SIZE A4	UNITS mm	SHEET/OF 1/1
CHK	DATE		SCALE 3:1		2EDG-5.08
APP.	DATE		NAME		

深圳市金航标电子有限公司
KH-F400V-8P-5.08G
WWW.BDS666.COM
0755-83044319