


DC-005H-D020



DC Power jack

G-Switch P/N:


D:needle diameter
D020=2.0mm

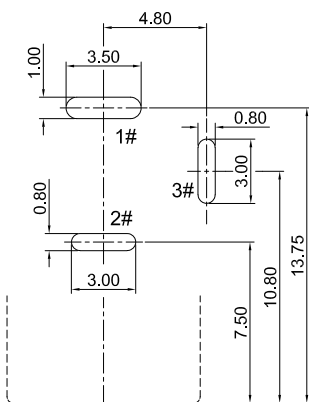

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

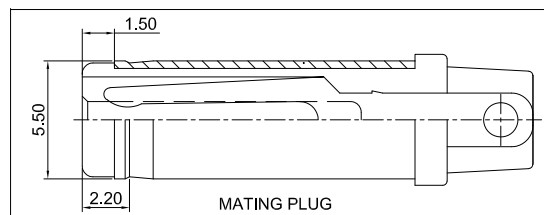

G-Switch Specification:
 Operating temperature range: -40°C to +85°C
 Rating: 7.0A.35V DC
 Insulation resistance: 100MΩ min. 100V DC
 Dielectric strength: 500V AC for 1 min
 Contact resistance: 30m Ω max.
 Life: 5,000 Cycles



G-Switch Electronic (HongKong) CO.,Ltd.

Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°	DESIGN 陈锋枫	DATE 2022.07.29	TITLE:	
	CHECKED	DATE	DC-005H-D020	
	APPROVED	DATE	REV.: X1	SCALE: 4:1
	http://www.dg-switch.com		UNIT: mm	
TEL:0769-82388879		SIZE: A4	SHEET: 1/1	

C	SPRING	COPPER ALLOY	Sn80u"/Ni 40u"	1
B	CENTER PIN	BRASS	Sn80u"/Ni 40u"	1
A	HOUSING	PA10T无卤	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY