
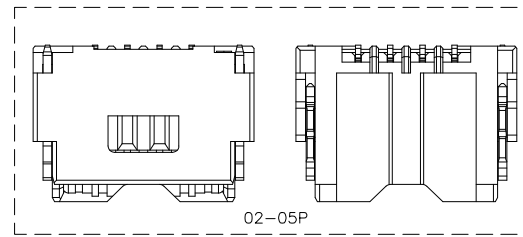


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2024.03.27	

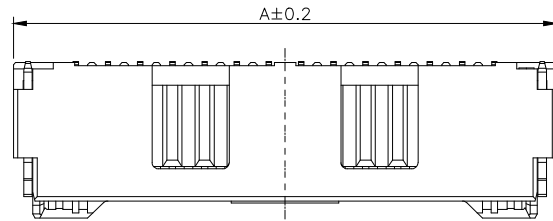

规格 Specifications:

额定电压 Voltage rating:100VAC/DC。




额定电流 Current rating:2A AC/DC

耐电压 Withstanding voltage:500V AC/minute

温度区间 Temperature range:-40℃to+85℃

绝缘电阻 Insulation resistance: $\geq 500M\Omega$ Min

接触电阻 Contact resistance: $\leq 20m\Omega$ Max

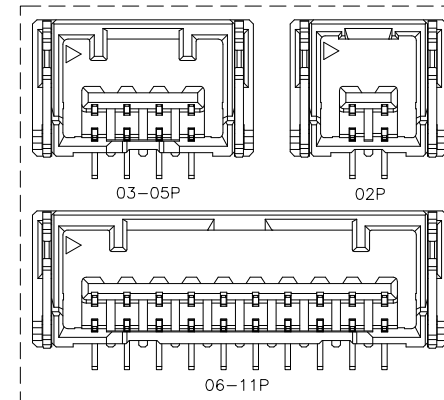
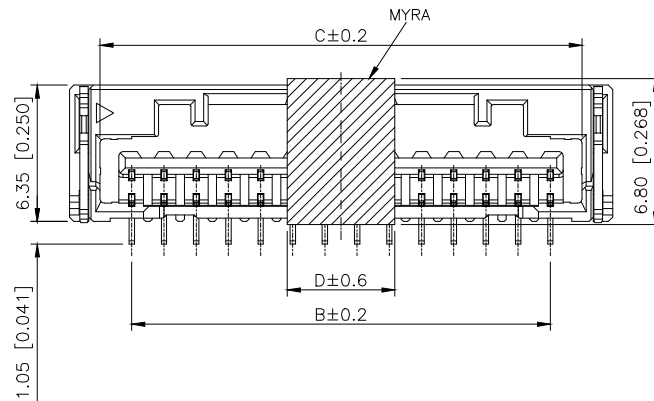


PART NO.:

X1515	W	V	S-XX	LP	SW
①	②	③	④	⑤	⑥


⑦

- ① Series No
- ② Category:W—Wafer
- ③ Welding Board Angle:V—Staight Angle 180°
- ④ Welding Way:S—SMT
- ⑤ Row No —Pin No:XX—02P—15P
- ⑥ Material:LP—LCP 94V—0
- ⑦ Planting Category:SW—Matte Tin plating

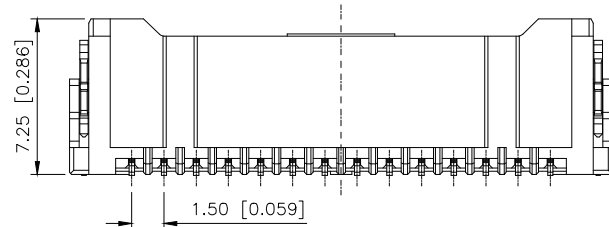

Poles	Dimensions(mm)				Poles	Dimensions(mm)			
	A	B	C	D		A	B	C	D
02	7.30	1.50	4.45	6.10	09	17.80	12.00	14.95	5.00
03	8.80	3.00	5.95	7.60	10	19.30	13.50	16.45	5.00
04	10.30	4.50	7.45	9.10	11	20.80	15.00	17.95	5.00
05	11.80	6.00	8.95	10.60	12	22.30	16.50	19.45	5.00
06	13.30	7.50	10.45	12.10	13	23.80	18.00	20.95	5.00
07	14.80	9.00	11.95	13.60	14	25.80	19.50	22.45	5.00
08	16.30	10.50	13.45	5.00	15	26.80	21.00	23.95	5.00

X1515WVS-XX-LPSW	LCP UL 94V-0	Phosphor Bronze	Brass	Matte Tin-Plated	X1515H
PART NO	Material	Material(pin)	Material	Finish(pin)	Suitable XKB Termina

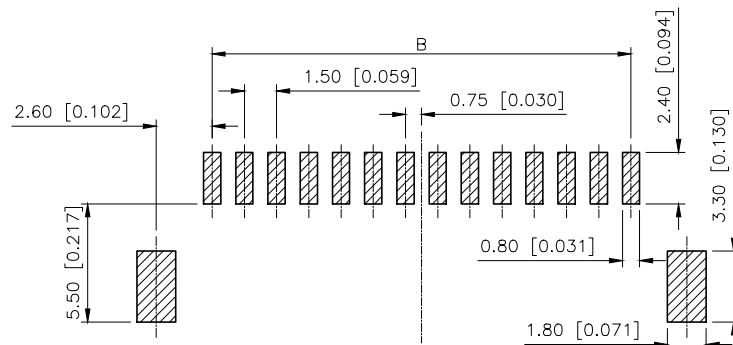

ANGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	桑 葚	VIEW: 	MODEL TYPE: 1.50mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X1515WVS-XX-LPSW
APPROVED		SIZE: A4	DWG NO.:

SCALE	PAGE	REVISION
N/A	1 / 1	A0