

# DATA SHEET

## THYRISTOR SURGE SUPPRESSORS MODEMS/LINE CARD PXXXXTA series

RoHS compliant & Halogen free



Product specification— March 18, 2021 V.2



## Thyristor Surge Suppressors (TSS) Data Sheet

### Description

DO-214AC Thyristor solid state protection thyristor protect telecommunications equipment such as modems, line cards, fax machines, and other CPE.

P Series devices are used to enable equipment to meet various regulatory requirements including GR 1089, ITU K.20, K.21 and K.45, IEC 60950, UL 60950, and TIA-968 (formerly known as FCC Part 68).



### Features

Compared to surge suppression using other technologies, P Series devices offer absolute surge protection regardless of the surge current available and the rate of applied voltage (dv/dt). P Series devices:

- Cannot be damaged by voltage
- Eliminate hysteresis and heat dissipation typically found with clamping devices
- Eliminate voltage overshoot caused by fast-rising transients
- Are non-degenerative
- Will not fatigue
- Have low capacitance, making them ideal for high-speed transmission equipment
- Meets MSL level 1, per J-STD-020
- Safety certification: UL: E244458

### Electrical Parameters

| Parameter | Definition   |
|-----------|--|
| $V_{DRM}$ | <b>Peak Off-state Voltage</b> – maximum voltage that can be applied while maintaining off state          |
| $V_S$     | <b>Switching Voltage</b> – maximum voltage prior to switching to on state                                |
| $V_T$     | <b>On-state Voltage</b> – maximum voltage measured at rated on-state current                             |
| $I_{DRM}$ | <b>Leakage Current</b> – maximum peak off-state current measured at $V_{DRM}$                            |
| $I_S$     | <b>Switching Current</b> – maximum current required to switch to on state                                |
| $I_T$     | <b>On-state Current</b> – maximum rated continuous on-state current                                      |
| $I_H$     | <b>Holding Current</b> – typical current required to maintain on state                                   |
| $C_O$     | <b>Off-state Capacitance</b> – typical capacitance measured in off state                                 |
| $I_{PP}$  | <b>Peak Pulse Current</b> – maximum rated peak impulse current   |
| $I_{TSM}$ | <b>Peak One-cycle Surge Current</b> – maximum rated one-cycle AC current                                 |
| $di/dt$   | <b>Rate of Rise of Current</b> – maximum rated value of the acceptable rate of rise in current over time |

## Electrical Characteristics

| Part Number | V <sub>DRM</sub> (V) | V <sub>S</sub> (V) | V <sub>T</sub> (V) | I <sub>DRM</sub> (μA) | I <sub>S</sub> (mA) | I <sub>T</sub> (A) | I <sub>H</sub> (mA) | C <sub>o</sub> (pF) | Marking |
|-------------|----------------------|--------------------|--------------------|-----------------------|---------------------|--------------------|---------------------|---------------------|---------|
| P0080TA     | 6                    | 25                 | 4                  | 5                     | 800                 | 2.2                | 50                  | 50                  | P008A   |
| P0300TA     | 25                   | 40                 | 4                  | 5                     | 800                 | 2.2                | 50                  | 70                  | P03A    |
| P0640TA     | 58                   | 77                 | 4                  | 5                     | 800                 | 2.2                | 150                 | 50                  | P06A    |
| P0720TA     | 65                   | 88                 | 4                  | 5                     | 800                 | 2.2                | 150                 | 50                  | P07A    |
| P0900TA     | 75                   | 98                 | 4                  | 5                     | 800                 | 2.2                | 150                 | 45                  | P09A    |
| P1100TA     | 90                   | 130                | 4                  | 5                     | 800                 | 2.2                | 150                 | 45                  | P11A    |
| P1300TA     | 120                  | 160                | 4                  | 5                     | 800                 | 2.2                | 150                 | 45                  | P13A    |
| P1500TA     | 140                  | 180                | 4                  | 5                     | 800                 | 2.2                | 150                 | 40                  | P15A    |
| P1800TA     | 170                  | 220                | 4                  | 5                     | 800                 | 2.2                | 150                 | 40                  | P18A    |
| P2300TA     | 190                  | 260                | 4                  | 5                     | 800                 | 2.2                | 150                 | 35                  | P23A    |
| P2600TA     | 220                  | 300                | 4                  | 5                     | 800                 | 2.2                | 150                 | 35                  | P26A    |
| P3100TA     | 275                  | 350                | 4                  | 5                     | 800                 | 2.2                | 150                 | 30                  | P31A    |
| P3500TA     | 320                  | 400                | 4                  | 5                     | 800                 | 2.2                | 150                 | 30                  | P35A    |


### Notes:

- All measurements are made at an ambient temperature of 25°C. I<sub>PP</sub> applies to -40°C through +85°C temperature range.
- Off-state capacitance(C<sub>o</sub>) is measured at 1 MHz with a 2V bias and is typical value.
- For surge ratings, see table below.


## Surge Ratings

| Series | I <sub>PP</sub><br>2×10μs<br>(A) | I <sub>PP</sub><br>8×20μs<br>(A) | I <sub>PP</sub><br>10×160μs<br>(A) | I <sub>PP</sub><br>10×560μs<br>(A) | I <sub>PP</sub><br>10×1000μs<br>(A) | I <sub>TSM</sub><br>60Hz<br>(A) | di/dt<br>(A/μs) |
|--------|----------------------------------|----------------------------------|------------------------------------|------------------------------------|-------------------------------------|---------------------------------|-----------------|
| A      | 150                              | 150                              | 90                                 | 50                                 | 45                                  | 20                              | 500             |

## Thermal Considerations

| Package DO-214AC/SMA  | Symbol           | Parameter                              | Value       | Unit |
|---|------------------|--|-------------|------|
|  | T <sub>J</sub>   | Operating Junction Temperature         | -40 to +125 | °C   |
|   | T <sub>S</sub>   | Storage Temperature Range              | -40 to +150 | °C   |
|   | R <sub>θJA</sub> | Junction to Ambient on printed circuit | 120         | °C/W |

**Part Number Code and Marking**

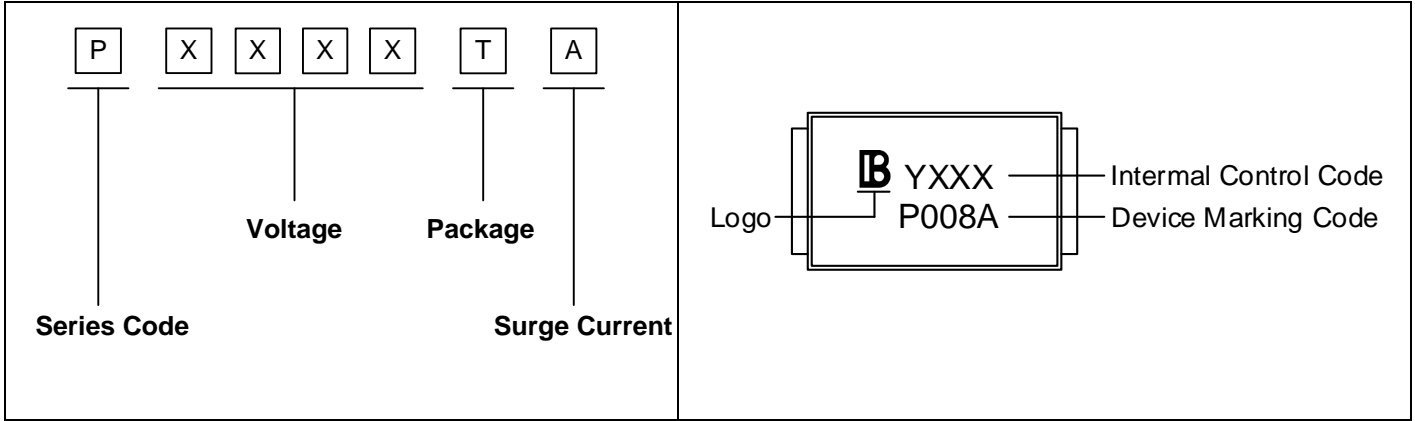

**Characteristics Curves**

Figure 1. V-I Characteristics

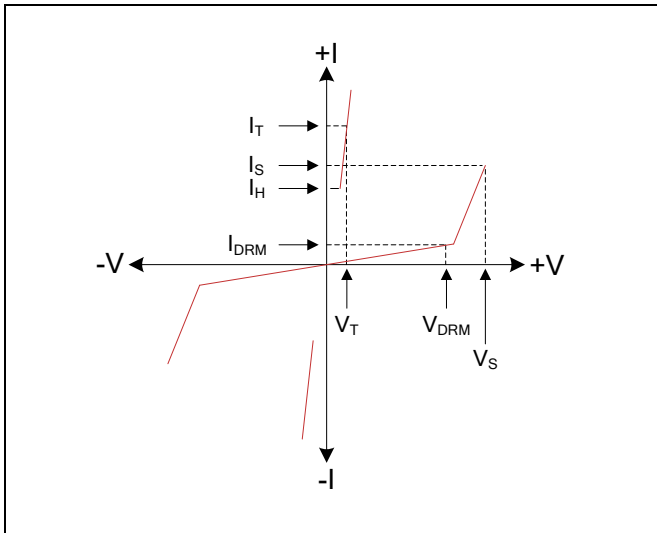


Figure 2.  $t_r \times t_d$  Pulse Wave-form

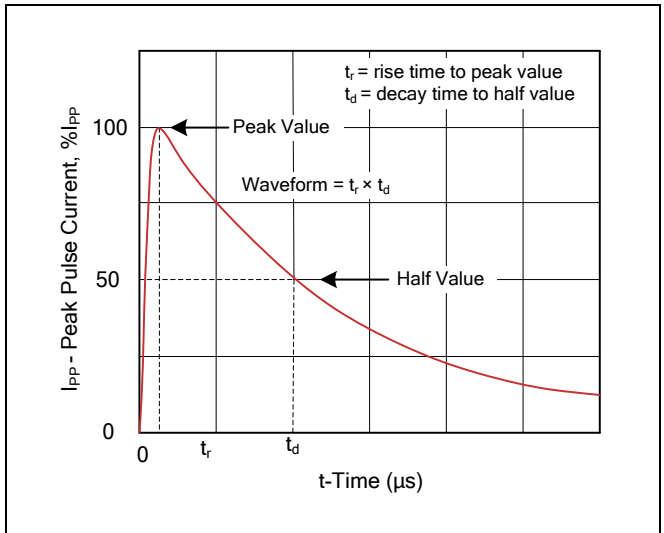


Figure 3. Normalized  $V_s$  Change versus Junction Temperature



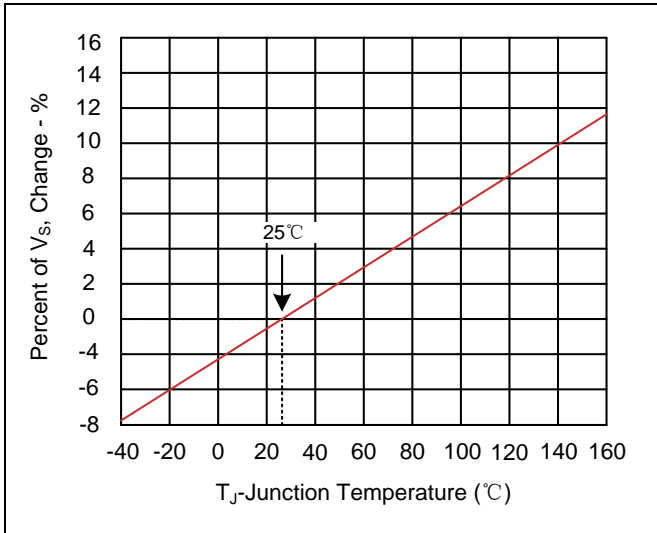


Figure 4. Normalized DC Holding Current versus Case Temperature

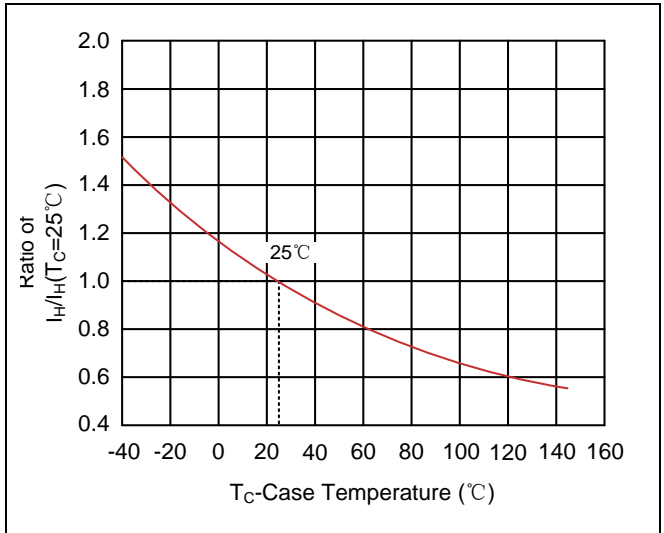

**Recommended Soldering Conditions**

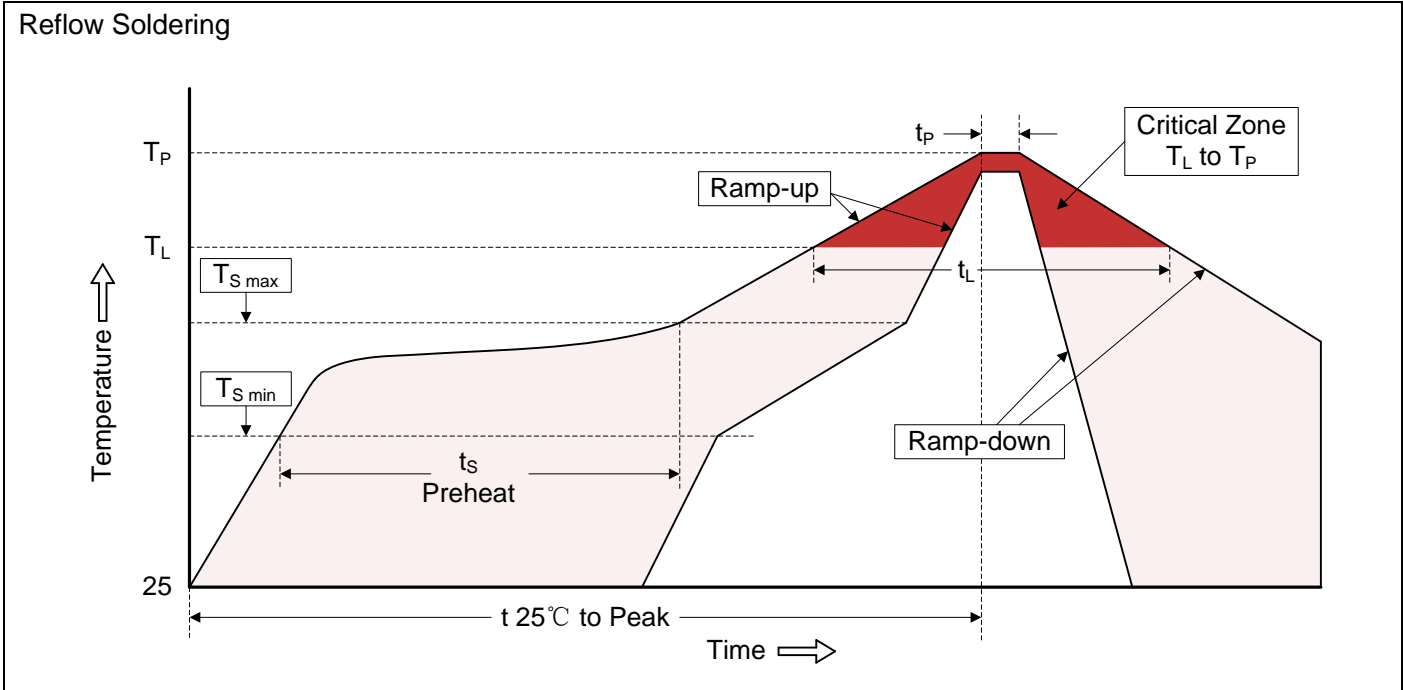

**Recommended Conditions**

| Profile Feature   | Pb-Free Assembly                 |
|---|----------------------------------|
| Average ramp-up rate ( $T_L$ to $T_P$ )   | 3°C/second max.                  |
| Preheat<br>-Temperature Min ( $T_{S\ min}$ )<br>-Temperature Max ( $T_{S\ max}$ )<br>-Time (min to max) ( $t_s$ ) | 150°C<br>200°C<br>60-180 seconds |
| $T_{S\ max}$ to $T_L$<br>-Ramp-up Rate  | 3°C/second max.                  |
| Time maintained above:<br>-Temperature ( $T_L$ )<br>-Time ( $t_L$ )   | 217°C<br>60-150 seconds          |
| Peak Temperature ( $T_P$ )  | 260°C                            |
| Time within 5°C of actual Peak Temperature ( $t_P$ )  | 20-40 seconds                    |
| Ramp-down Rate  | 6°C/second max.                  |
| Time 25°C to Peak Temperature   | 8 minutes max.                   |

**Dimensions (SMA/DO-214AC)**

|  | Symbol | Millimeters |       | Inches |       |
|--|--------|-------------|-------|--------|-------|
|  |        | Min.        | Max.  | Min.   | Max.  |
|  | L      | 3.99        | 4.50  | 0.157  | 0.177 |
|  | D      | 2.54        | 2.79  | 0.100  | 0.110 |
|  | D1     | 1.25        | 1.65  | 0.049  | 0.065 |
|  | T      | 4.93        | 5.28  | 0.194  | 0.208 |
|  | T1     | 0.76        | 1.52  | 0.030  | 0.060 |
|  | d      | -           | 0.203 | -      | 0.008 |
|  | H      | 2.00        | 2.50  | 0.079  | 0.098 |

**Packaging**

| <p><b>Tape</b></p> | Symbol             | Dimension (mm) |            |
|--------------------|--------------------|----------------|------------|
|                    | W                  | 12.00±0.20     |            |
|                    | P0                 | 4.00±0.10      |            |
|                    | P1                 | 4.00±0.10      |            |
|                    | P2                 | 2.00±0.10      |            |
|                    | D0                 | Φ1.50±0.10     |            |
|                    | D1                 | Φ1.50±0.10     |            |
|                    | E                  | 1.75±0.10      |            |
|                    | F                  | 5.50±0.10      |            |
|                    | A0                 | 2.79±0.10      |            |
|                    | B0                 | 5.33±0.10      |            |
|                    | K0                 | 2.55±0.10      |            |
|                    | T                  | 0.25±0.05      |            |
|                    | <p><b>Reel</b></p> | D2             | Φ330.0±2.0 |
|                    |                    | D3             | Φ13.5±0.5  |
| H                  |                    | 2.5±0.5        |            |
| W1                 |                    | 16.0±1.0       |            |
| Quantity: 5000PCS  |                    |                |            |