

1607273

https://www.phoenixcontact.com/us/products/1607273

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable connector, straight, Screw locking mechanism, M23, number of positions: 12, contact connection type: Socket, shielded: yes, degree of protection: IP67, cable diameter range: 6 mm . .. 10 mm, number of positions: 12, connection method: Crimp connection, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242259

Commercial data

Item number	1607273
Packing unit	20 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAGA
GTIN	4046356268431
Weight per piece (including packing)	95.7 g
Weight per piece (excluding packing)	95.7 g
Customs tariff number	85366990
Country of origin	DE



1607273

https://www.phoenixcontact.com/us/products/1607273

Technical data

Notes

Order information:	Order crimp contacts Ø 1 mm separately

Product properties

Product type	Circular connector (cable-side)
Series	RF
Application	Feedback, signal
	Signal
Number of positions	12
Connection profile	12
Shielded	yes
Coding	N
Thread type	M23
Data management status	
Article revision	04

Material specifications

Seal material	FPM
Housing material	Metal
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Insulator material	PA 6.6
Gasket and O-ring material	FPM

Connection data

Conductor connection

Connection method	Crimp connection
-------------------	------------------

Electrical properties

Contact

Contact diameter	1 mm
Max. current	8 A
Nominal voltage U _N	48 V AC 74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

Connector

Туре	straight
Direction of rotation	Standard



1607273

https://www.phoenixcontact.com/us/products/1607273

Cable/line

External cable diameter	6 mm 10 mm
-------------------------	------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C 125 °C
Altitude	2000 m




https://www.phoenixcontact.com/us/products/1607273




Drawings

Dimensional drawing

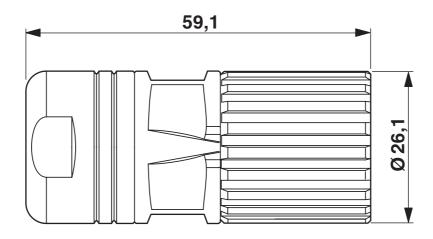

Dimensional drawing

Schematic diagram

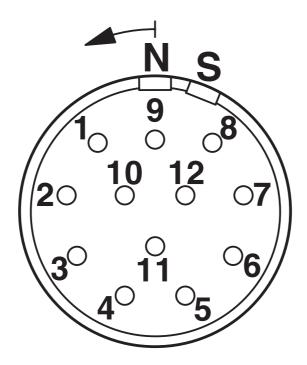

Connector pin assignment



1607273

https://www.phoenixcontact.com/us/products/1607273

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1607273

.71	cUL Recognized Approval ID: E153698-20090723			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	48 V	5 A	20 - 20	-

71	UL Recognized Approval ID: E153698-2	0090723			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		48 V	5 A	20 - 20	-

al II ue Ra	ecognized



1607273

https://www.phoenixcontact.com/us/products/1607273

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27440102	
ECLASS-12.0	27440116	
ECLASS-13.0	27440116	
ETIM		
ETIM 9.0	EC002635	
UNSPSC		

39121400



1607273

https://www.phoenixcontact.com/us/products/1607273

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	f8988a9d-5c65-4611-b18e-2b6e5b70b3bd

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com