


order number: J00026A4111

MFP8-4x90 T568B Cat.6_A, AWG24/1-22/1, AWG27/7-22/7, blister package



Fig. may differ

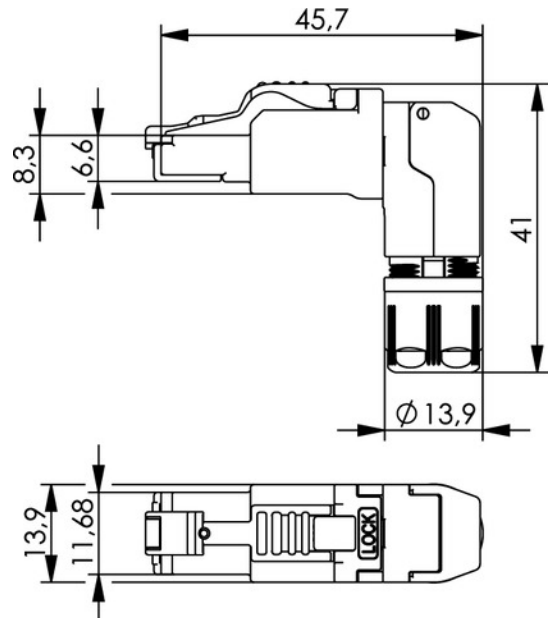

Technical Attributes	
Short name	MFP8-4x90 T568B Cat.6 _A
Remarks	AWG 24/1-22/1, AWG 27/7-22/7, incl. pre-assembled protection cap
Type	blister package (10 pcs.)

Performance Characteristics

- Cu conductor diameter:(J00026A4000, -1, -2, -4110, -4111, -4112)solid 0.51 – 0.64 mm (AWG24/1 – 22/1)stranded 0.46 – 0.76 mm (AWG27/7 – 22/7)stranded 0.61 – 0.78 mm (AWG24/19 – 22/19)* ; core diameter: 1.0 – 1.6 mm
- IP20
- Outer diameter: 5.5 – 10.0 mm
- Cable entry from 4 directions (4x90)
- Cable strain relief: AF13

- Category 6A acc. to ISO/IEC 11801
- Life: ≥ 750 mating cycles
- PoE+ acc to IEEE 802.3at
- Plug: IEC 60603-7-51 compliant
- Temperature range: -40°C to 85°C
- Shielding housing material: die-cast nickel-plated zinc
- Contact finish material: Ni1,2Au0,8
- Reusable IDC: ≤ 4 cycles

Mechanical Characteristics	
Insertion force	≤ 30 N
Durability (Matings)	≥ 750
Reusable contacts	≤ 10 cycles
Cu-Conductor diameter: solid	0.51 - 0.64 mm (AWG24/1-22/1)
Cu-Conductor diameter: stranded	0.46 - 0.76 mm (AWG27/7-22/7)
Mating Requirements Cu-Conductor diameter: stranded	0.61 - 0.78 mm (AWG24-22/19)
Core Diameter	1,0 - 1,6 mm
Material: contacts	phosphor bronze tinned
Material: connector housing	PC UL94 V0
Material: PCB	FR4 UL 94 V0
Material: piercing contacts	phosphor bronze tinned
Material: shield contact	brass, nickel-plated
Material: wire pair presorting	PC UL94 V0 white
Material: uplock hook	PBT UL94 V0
Material: shielding housing	zinc diecast, nickel-plated
Material: cable clamp	PBT UL94 V0
Material: protection cap	PBT UL94 V0

Climatic Characteristics	
Temperature range [$^{\circ}\text{C}$]	-40/ 85
UL	E244889

Standards	

Connectors	IEC 60603-7-51
10 Gigabit Ethernet acc. to IEEE 802.3an	Adequate for 10 Gigabit Ethernet