
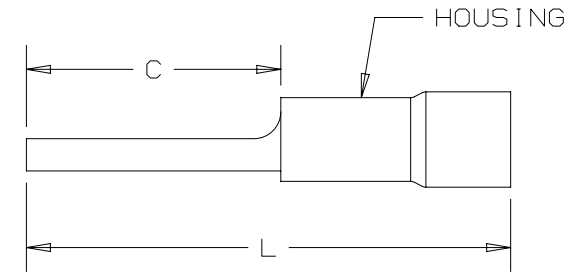


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm²]	MAX. WIRE INSUL. DIA.	HOUSING COLOR	DIMENSIONS in. [mm]				TOOLS
				L ± .03 [0,8]	B ± .01 [0,3]	C ± .02 [0,3]	D DIA	
EV18-P47B	#22-18 [0,5-1,0]	.15 [3,8]	RED	.97 [24,6]	.07 [1,8]	.49 [12,4]	.15 [3,8]	CT-100A **CT-260 CT-600A (CT-550CH) CT-1550 CT-1551 CT-2500 (CT-2550CH)
EV14-P47B	#16-14 [1,5-2,5]	.17 [4,3]	BLUE	.97 [24,6]	.07 [1,8]	.49 [12,4]	.17 [4,3]	
EV10-P55*	#12-10 [4,0-6,0]	.25 [6,4]	YELLOW	1.10 [27,9]	.10 [2,5]	.55 [14,0]	.25 [6,35]	

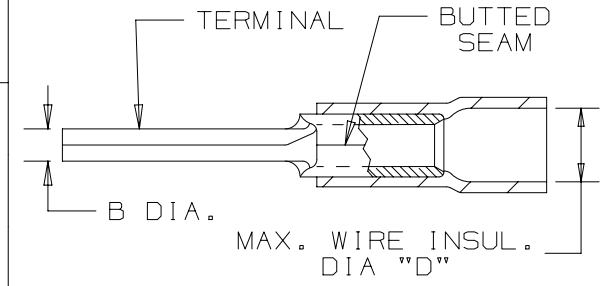

\* EV10-P55 NOT UL LISTED, BRAZED SEAM, 300V MAX VOLTAGE  
\*\*PANDUIT APPROVED TOOL

NOTES:

- UL LISTED FOR:
  - A. SOLID OR STRANDED COPPER WIRE ONLY
  - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
  - C. 600V. MAX. VOLTAGE RATING
- MATERIAL:
  - A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED
  - B. HOUSING: VINYL, COLOR CODED
- WIRE STRIP LENGTH: 5/16" <sup>+1/32</sup>/<sub>-0</sub> [7,9mm <sup>+0,8</sup>/<sub>-0</sub>]
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT



LISTED  
587H  
E52164

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

TITLE STRONGHOLD PIN TERMINAL VINYL INSULATED #22-10 AWG CUSTOMER DRAWING			
ITEM REVISION NAME 00123STB/00		<b>PANDUIT</b>	
DATASET FILE NAME 00123STB/00			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: SEE NOTES	
.X ± .XX ±		.XXX ± ANGLES ±	
DRAWN BY JHNU		DRAWING NUMBER: SH41335	
DATE 2/18		SCALE N.T.S.	
CHK TMR		SHT 1 OF 1	
REV		SIZE A	

2

1

D10100DA/16

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[EV10-P55-Q](#) [EV14-P47B-L](#) [EV14-P47B-Q](#) [EV18-P47B-Q](#) [EV18-P47B-L](#)