

Coaxial Low Pass Filter

VLF-80+

50Ω *DC to 80 MHz



Generic photo used for illustration purposes only

CASE STYLE: FF704

Connectors	Model
SMA	VLF-80+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	8.5W max. at 25°C

* Passband rating, derate linearly to 3.5W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

Features

- rugged uni-body construction, small size
- 7 sections
- excellent power handling, 8.5W
- temperature stable
- low cost
- protected by U.S. Patent 6,943,646

Applications


- harmonic rejection
- transmitters/receivers
- lab use

Electrical Specifications at 25°C

PASSBAND (MHz) (loss < 1 dB)	f _{co} , MHz Nom. (loss 3 dB)	STOP BAND (MHz) (loss, dB)			VSWR (:1)		NO. OF SECTIONS
		f 20 Min.	40 Typ.	fr 20 Typ.	Stopband Typ.	Passband Typ.	
Max.	Typ.	Min.	Typ.	Typ.	Typ.	Typ.	7
*DC-80	145	200	225-1550	4500	20	1.2	

* Not for use with DC voltage at input and output ports


Outline Drawing

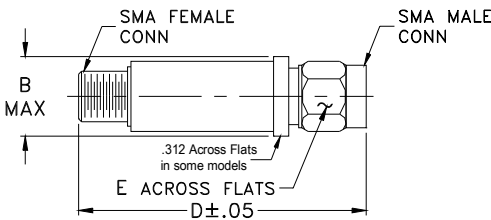


Outline Dimensions (inch/mm)

B	D	E	wt
.410	1.43	.312	grams
10.41	36.32	7.92	10.0

typical frequency response





electrical schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	0.22	1.05
50	0.54	1.12
80	0.80	1.14
120	1.48	1.31
145	3.00	2.05
165	5.77	2.21
175	10.24	1.96
185	22.74	4.50
200	33.16	7.66
225	44.32	9.96
500	44.85	43.44
1000	46.49	78.97
1550	43.24	75.53
2500	28.79	82.73
4500	22.48	66.82

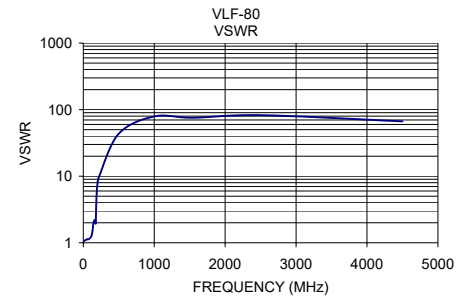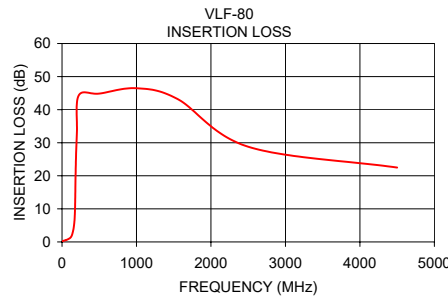

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. E
M151777
VLF-80+
ED-11690/4
RVN/AD/CP/AM
200522
Page 1 of 1

Coaxial Low Pass Filter

VLF-80+

Typical Performance Data

FREQ. (MHz)	INSERTION LOSS (dB)			INPUT RETURN LOSS (dB)			OUTPUT RETURNLOSS (dB)		
	@ -55° C	@ +25° C	@ +100° C	@ -55° C	@ +25° C	@ +100° C	@ -55° C	@ +25° C	@ +100° C
1	0.17	0.22	0.32	33.75	32.26	30.75	34.02	32.26	30.84
20	0.28	0.35	0.41	29.81	27.72	26.11	30.01	28.04	26.61
25	0.29	0.35	0.42	30.06	28.21	26.50	30.26	28.61	26.94
30	0.35	0.42	0.48	27.71	27.04	25.80	28.11	27.65	26.37
35	0.37	0.44	0.50	26.69	26.46	25.51	27.38	27.48	26.41
40	0.41	0.48	0.55	25.64	25.83	25.12	26.26	26.80	26.15
45	0.43	0.51	0.58	24.87	25.25	24.78	25.85	26.65	26.17
50	0.46	0.54	0.62	24.18	24.70	24.41	25.27	26.16	25.92
60	0.53	0.62	0.69	23.46	24.00	23.90	24.46	25.34	25.40
70	0.61	0.70	0.78	23.24	23.58	23.46	24.54	25.29	25.41
80	0.69	0.80	0.89	23.75	23.71	23.41	25.52	25.84	25.74
95	0.84	0.97	1.07	25.07	24.27	23.58	28.64	27.61	26.85
145	2.85	3.00	3.14	8.78	9.28	9.69	8.35	8.86	9.31
165	5.54	5.77	6.00	8.74	8.47	8.35	6.14	6.23	6.35
180	17.12	15.65	14.91	4.91	5.97	6.69	2.92	3.49	3.92
185	24.97	22.74	21.39	3.25	3.93	4.47	2.08	2.49	2.84
190	31.17	29.28	27.83	2.54	3.01	3.40	1.69	1.99	2.26
195	32.76	32.08	31.38	2.17	2.55	2.86	1.47	1.73	1.95
200	33.70	33.16	32.76	1.96	2.28	2.54	1.34	1.56	1.76
215	41.70	40.09	39.13	1.62	1.89	2.10	1.12	1.30	1.47
225	44.77	44.32	43.66	1.50	1.75	1.95	1.04	1.21	1.36
230	42.59	42.92	42.87	1.45	1.70	1.88	1.00	1.17	1.32
265	38.13	37.98	37.90	1.18	1.39	1.52	0.83	0.98	1.16
290	41.12	40.60	40.28	1.01	1.18	1.36	0.76	0.91	1.01
310	46.16	45.10	44.44	0.91	1.07	1.22	0.72	0.86	0.98
345	55.34	56.31	56.39	0.74	0.86	0.97	0.60	0.73	0.86
400	44.15	44.49	44.77	0.54	0.62	0.70	0.54	0.65	0.75
550	48.85	48.24	47.86	0.28	0.33	0.37	0.35	0.43	0.51
650	63.86	66.51	65.72	0.24	0.28	0.31	0.27	0.34	0.41
800	47.45	48.21	48.77	0.19	0.23	0.26	0.21	0.27	0.34
1550	40.69	43.24	45.18	0.20	0.23	0.25	0.34	0.36	0.38
2000	34.21	34.49	34.62	0.20	0.22	0.25	0.25	0.27	0.32
2500	28.42	28.79	29.10	0.14	0.21	0.28	0.60	0.70	0.87
3000	36.81	33.91	31.47	0.22	0.28	0.37	6.65	10.95	11.72
3500	26.00	26.24	26.40	0.11	0.18	0.29	0.31	0.44	0.57
4000	23.91	24.01	24.02	0.13	0.22	0.35	0.19	0.30	0.42
4500	22.43	22.48	22.62	0.17	0.26	0.40	0.27	0.39	0.50
5000	20.89	21.11	21.38	0.31	0.50	0.71	0.17	0.31	0.49
5500	19.90	19.85	20.00	0.27	0.40	0.57	0.48	0.53	0.63
6000	18.74	19.18	19.45	0.67	0.75	0.81	0.33	0.50	0.71
8000	11.84	12.56	12.99	4.83	5.02	5.53	2.61	1.52	1.31
10000	9.10	9.09	9.32	3.57	4.11	5.02	5.33	4.47	4.20
12000	12.09	12.92	14.40	6.11	8.00	9.87	2.53	3.62	5.26

REV. X1
VLF-80+
080720
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Typical Performance Curves


INSERTION LOSS vs. TEMPERATURE

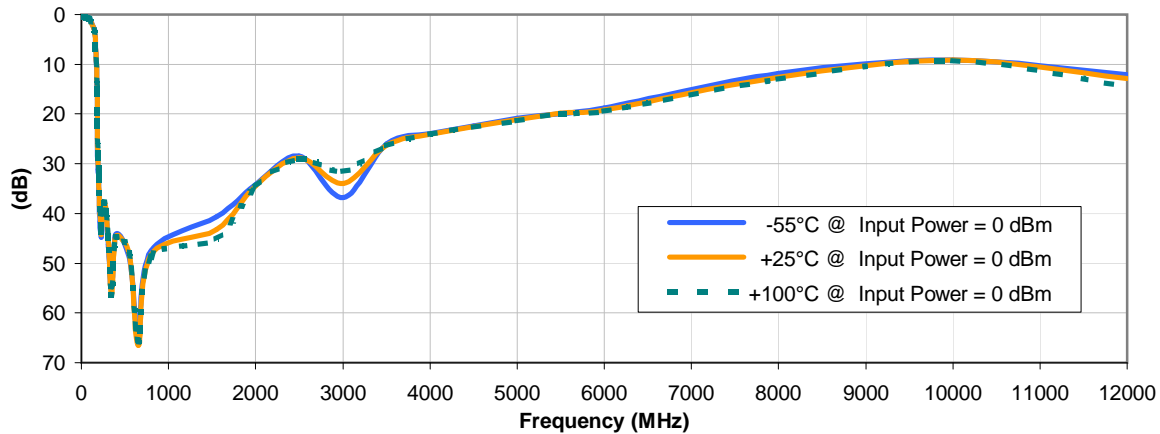

INPUT RETURN LOSS vs. TEMPERATURE

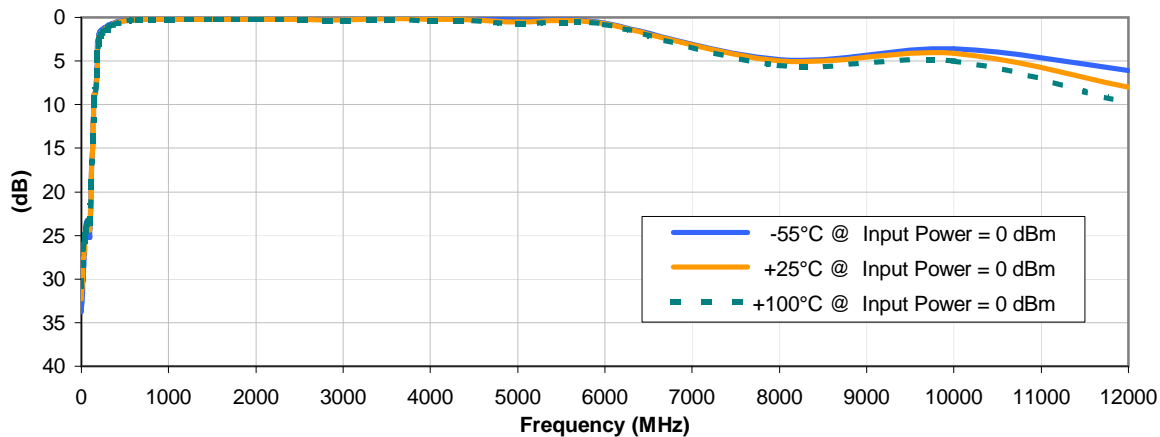

OUTPUT RETURN LOSS vs. TEMPERATURE

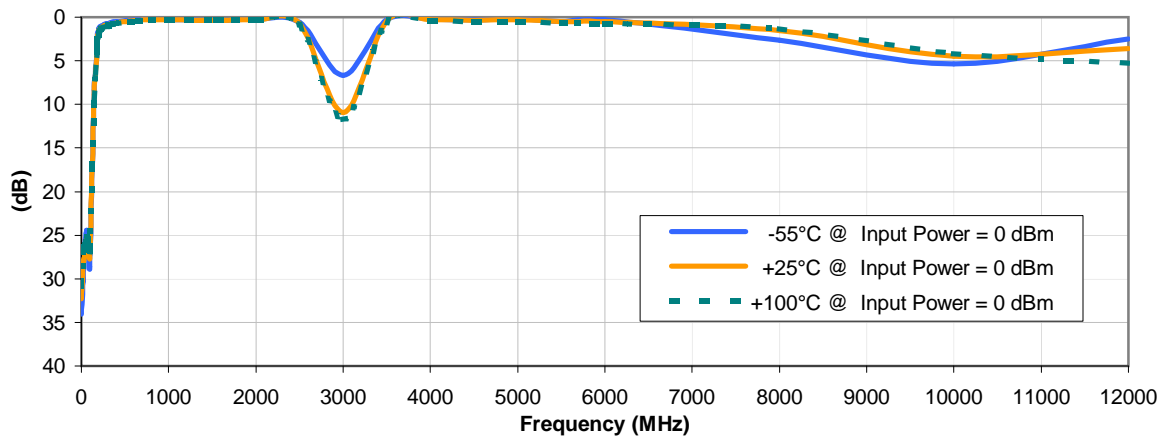


Case Style

FF

FF704

Outline Dimensions

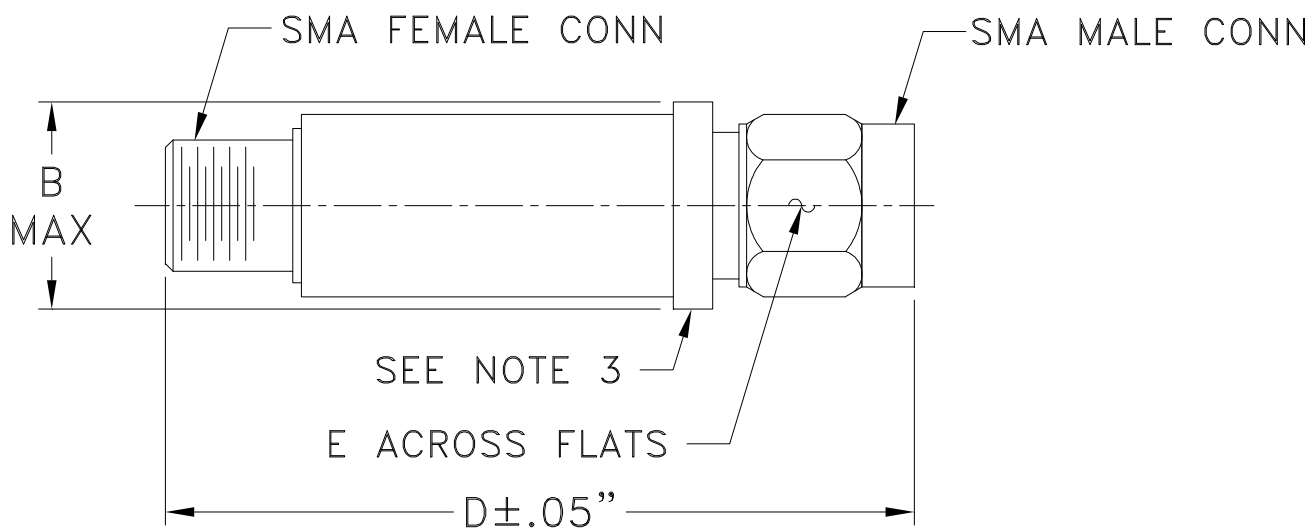

CASE #.	A	B	C	D	E	WT GRAMS
FF704	--	.410 (10.41)	--	1.43 (36.32)	.312 (7.92)	10.0

Dimensions are in inches (mm). Tolerances: 2Pl. ± .04; 3Pl. ± .030

Notes:

1. Case material: Stainless steel.
2. Case finish: Gold plated.
3. Round Flange may have .312 Across Flats in some models.

Mini-Circuits[®]
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I