


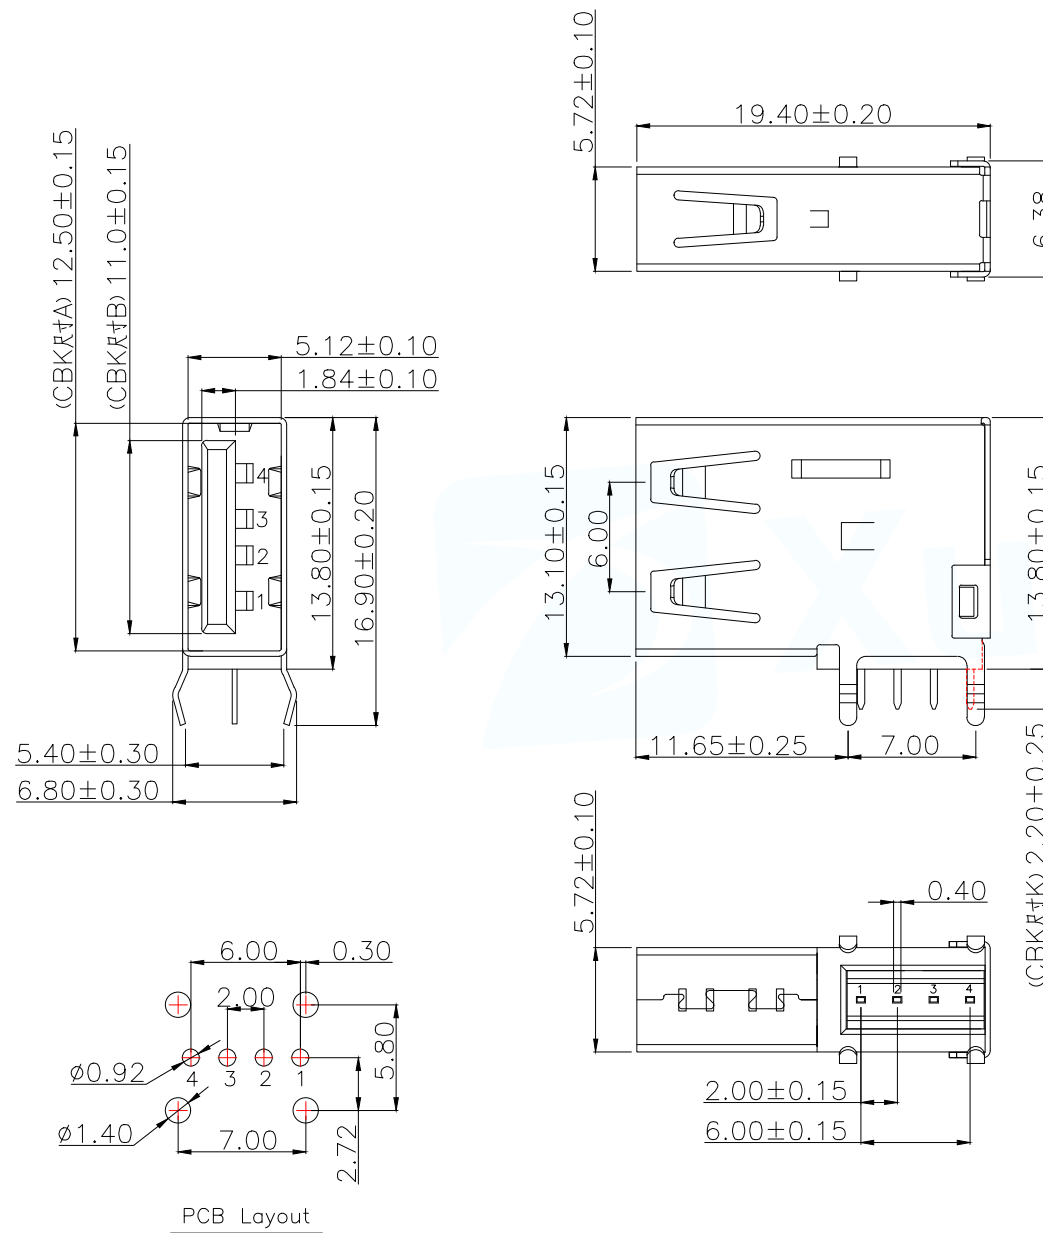

规格说明:Specifications:

电气特性:Electrical:

- 1.额定电流:Current Rating
1.5A/contact terminal
- 2.额定电压:Voltage Rating
30V DC
- 3.接触阻抗>Contact Resistance
30 milliohms MAX
- 4.耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5.绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 1.插拔力:Connector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 2.端子保持力:Terminal Retention
1.2kgf(MIN)

原材料:Material:

- 1.塑胶:Housing:
Hing Temperature Tnermaplastics,
UI 94V-0 PBT White
- 2.端子>Contact:Copper Alloy C2680
- 3.外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 1.端子>Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 2.外壳:Shell:
Nickel Plating

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES		 TITLE:USB AF 2.0 侧插连体弯脚加塞 13.8高无迹		
DECIMALS:	ANGLES:	PAR	USB-226-BRW	
.X:±0.30	X.:±5°	DWN	Lucas	
.XX:±0.20	X.X:±2°	CHKD	Ethan	
.XXX:±0.10		APVD	Jacob	
CUSTOMER COPY		SCALE:1:1	UNIT:MM	
		SIZE:A4	SHEET:1F1	REV:A