

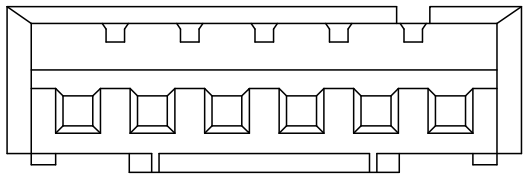
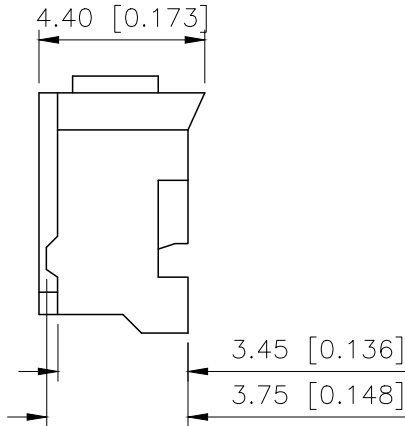
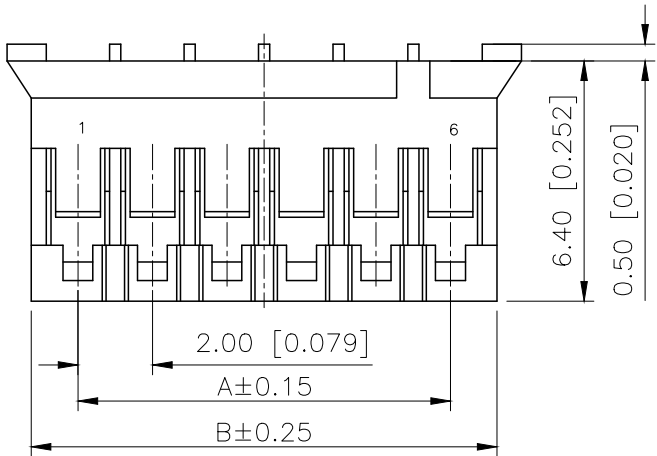
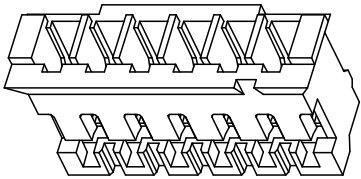


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.10	阿树

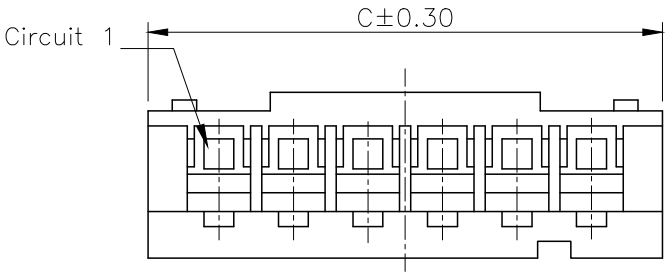

■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:2A AC/DC
- Withstanding Voltage:800V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ

PART NO.:

X2016 H M-XX-N0
① ② ③ ④ ⑤

- ①Series No
②Category:H-HSG
③M-Male
④Row No.Pin No:XX-02~16P
⑤Material:N0-PA66 UL94V-0

POLES	A	B	C	POLES	A	B	C
2	2.00	4.60	5.80	10	18.00	20.60	21.80
3	4.00	6.60	7.80	11	20.00	22.60	23.80
4	6.00	8.60	9.80	12	22.00	24.60	25.80
5	8.00	10.60	11.80	13	24.00	26.60	27.80
6	10.00	12.60	13.80	14	26.00	28.60	29.80
7	12.00	14.60	15.80	15	28.00	30.60	31.80
8	14.00	16.60	17.80	16	30.00	32.60	33.80
9	16.00	18.60	19.80				

X2016HM-XX-N0	PA66 UL 94V-0	X2016TF	X2016W X2016HF
PARY NO	Matrial	Suitable XKB Terminal	Suitable XKB Wafer or Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.00mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X2016HM-XX-N0
APPROVED		SIZE:	A4	DWG NO.:	