

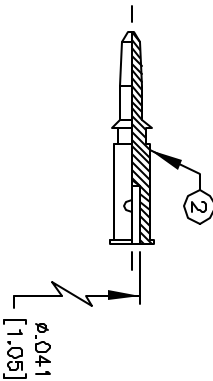
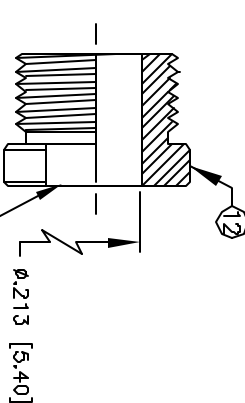
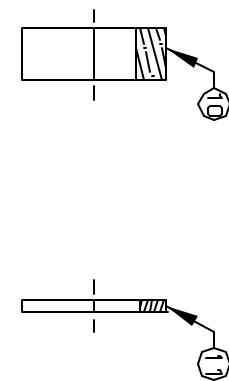



© COPYRIGHT 1998 BY SPC TECHNOLOGY. ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO.	SPC-F005, Total Pages: 2				
DCP #	REV	DESCRIPTION	DATE	CHECKD	DATE	APPRVD	DATE
129	A	RELEASED	2/10/98	J.C.	3/13/98	JMM	7/7/98

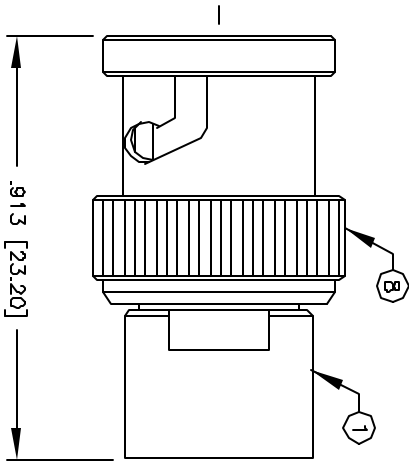

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
12	BACK NUT	1	BRASS	NICKEL
11	WASHER	1	BRASS	NICKEL
10	GASKET	1	S.I. RUBBER	RED
9	CLAMP	1	BRASS	NICKEL
8	SHELL	1	BRASS	NICKEL
7	WASHER	1	BRASS	NICKEL
6	SPRING	1	SKS	NICKEL
5	SPLIT LOCK WASHER	1	BRASS	NICKEL
4	GASKET	1	S.I. RUBBER	RED
3	DIELECTRIC	1	DELTRIN	NONE
2	PIN	1	BRASS	GOLD
1	BODY	1	BRASS	NICKEL

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 WORKING VOLTAGE: 500 VRMS @ SEA LEVEL
 FREQUENCY RANGE: 0-4 GHz
 INSERTION LOSS: ≤ -2 dB @ 3 GHz
 VSWR MAX: 1.4:1 @ 3 GHz
 FOR RG-58, 98A, 58C, 141, 141A, 400/U, BELDEN 8240,
 8259, 8262, 9201, 9203, 9310, 9311,
 COMM/SCOPE 0268 & CUSHCRAFT ULTRALINK TL922463E

SUGGESTED STRIPPING INSTRUCTIONS
 SUGGESTED CRIMP: .068

DISCLAIMER
 ALL DIMENSIONS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SPC TECHNOLOGY ASSUMES NO LIABILITY FOR THE USE OF THIS PRODUCT IN CONNECTION HEREWITH. THE USER SHALL OBTAIN THE NECESSARY PERMITS FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY THEREWITH.



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY: DANIEL CAREY	DATE: 2/10/98
	CHECKED BY: JOHN COLE	DATE: 3/13/98
	APPROVED BY: JEFF MCVICKER	DATE: 7/7/98

DRAWING TITLE: BNC MALE CLAMP SOLDER PLUG		ELECTRONIC FILE	
SIZE: A	DWG. NO.: 1551	92N3397.DWG	REV: A
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 1	OF 1