




**Part Number :** [2147210080](#)

**Product Description :** Zero-Hachi Header, 0.80mm Pitch, Single Row, Right-Angle, Surface Mount, Matte Tin (Sn) Plating, Friction Lock, 8 Circuits, Tape and Reel

**Series Number :** 214721

**Status :** Active

**Product Category :** PCB Headers and Receptacles

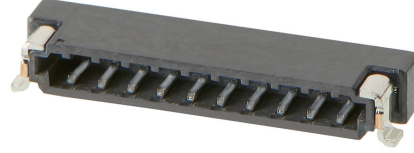

---

## Documents & Resources

### Drawings

[2147210080\\_sd.pdf](#)

### 3D Models and Design Files

[2147210080.dxf](#)

[2147210080.pdf](#)

[2147210080\\_stp.zip](#)

### Specifications


[2147219200-SPK-200.pdf](#)

[2147190000-PS-000.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

## Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	PCB Headers and Receptacles
Series	214721
Description	Zero-Hachi Header, 0.80mm Pitch, Single Row, Right-Angle, Surface Mount, Matte Tin (Sn) Plating, Friction Lock, 8 Circuits, Tape and Reel
Application	Signal, Wire-to-Board
Component Type	PCB Header
Product Family	Zero-Hachi Connector System
Product Name	Zero-Hachi
UPC	195842348622

#### Agency

UL	E29179
----	--------

#### Electrical

Current - Maximum per Contact	2.5A
Voltage - Maximum	30V AC (RMS)/DC

#### Physical

Breakaway	No
Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	20

First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Matte Tin
Material - Plating Termination	Matte Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	52.520/mg
Number of Rows	1
Orientation	Right Angle
Packaging Type	Embossed Tape on Reel
PCB Locator	No
PCB Retention	Yes
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	1.000µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Vacuum Pick-Up Area
Shrouded	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Surface Mount
Unmated Height	1.60mm

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
Zero-Hachi Single Row Receptacle Housings	<u>214719</u>