




1

2

3

4

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A1)X2	产品尺寸变更, 图面升级整理图面	2025.06.19	阿树

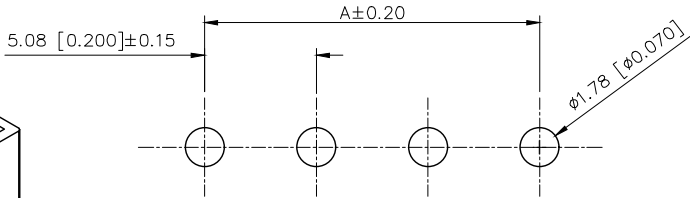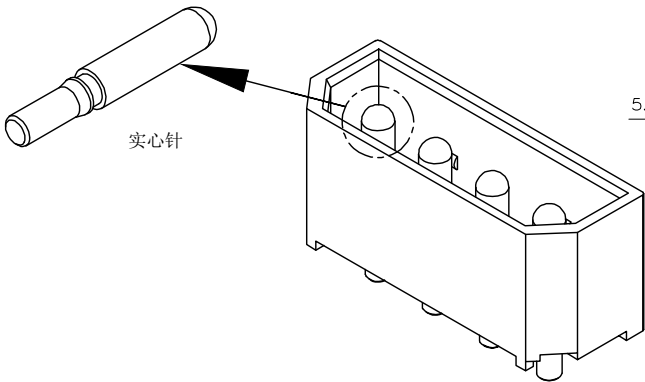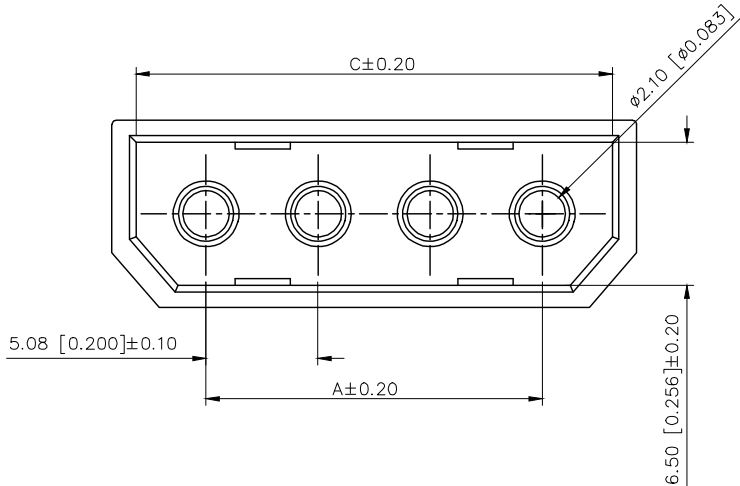

PCB LAYOUT



■SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 7A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- Material: Wafer PA66,UL94V-2
PIN Brass Tin-plated

PART NO.:

X5050 W V-XX-N2 SN XX
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category: W-Wafer
③Welding Board Angle: V-Straight 180°
④Row No.Pin No: XX-02~04Pin
⑤Material: N2-PA66 UL94V-2
⑥Planting: SN-Bright Tin Plating
⑦Color: Blank-Natural Color

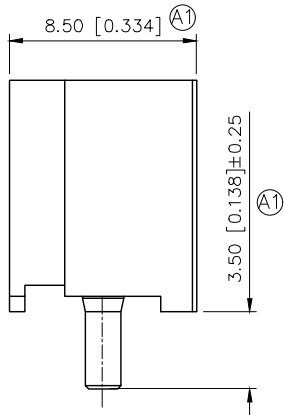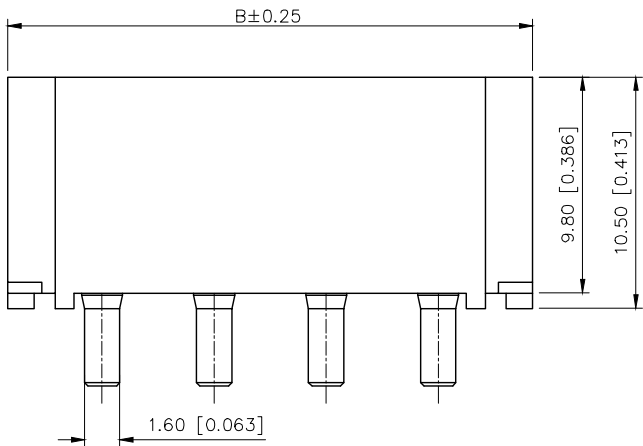

Poles	Dimensions(mm)		
	A	B	C
02	5.08	13.64	11.44
03	10.16	18.72	16.52
04	15.24	23.80	21.60

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE:	5.08mm Crimp Style Connectors
PART NO.:	X5050WV-XX-N2SN
DWG NO.:	

1

2

3

4