


Outline Dimensions and Mark
DO-15

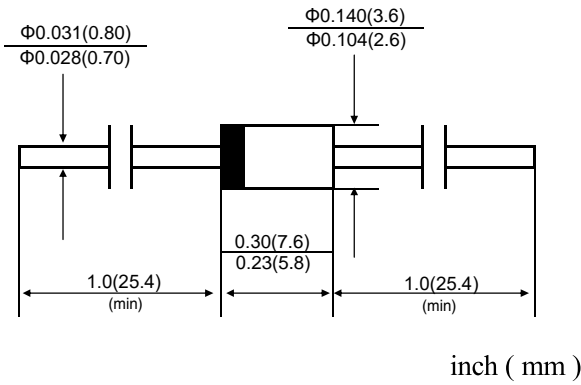

Features

P_{PPM} 600W
V_{BR} 6.8-600V

- 600W Peak pulse power capability at 10/1000μs waveform
- Typical IR less than 1uA above 12V
- High temperature soldering: 260°C/10s
- Meet UL flammability classification 94V-0

Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Max
Peak power dissipation, with a 10/1000us waveform ⁽¹⁾	P _{PPM}	W	600
Peak pulse current, with a 10/1000us waveform ⁽¹⁾	I _{PPM}	A	See Next Table
Power dissipation, on infinite heat sink at TL=75°C	P _D	W	5
Peak forward surge current, 8.3 ms single half sine-wave unidirectional only ⁽²⁾	I _{FSM}	A	100
Operating junction and storage temperature range	T _J , T _{STG}	°C	-55 to +150

Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Maximum instantaneous forward voltage at 35A for unidirectional only ⁽³⁾	V _{FM}	V	3.5/5.0

Notes:

- (1) Non-repetitive current pulse, per Fig. 3 and derated above T_A= 25°C per Fig.2.
- (2) Measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum.
- (3) V_F=3.5V Max for devices of V_{BR}≤220V, and V_F=5.0V Max for devices of V_{BR}>220V.

P6KE Series 600W Transient Voltage Suppressor
ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$)


Part Number (Uni)	Part Number (Bi)	Breakdown Voltage $V_{BR@I_T}$			Maximum Reverse Leakage $I_R @ V_{WM}$ (μA)	Working Peak Reverse Voltage V_{RWM} (V)	Maximum Reverse Surge Current I_{PP} (A) ①	Maximum Clamping Voltage $V_c @ I_{PP}$ (V)
		Min (V)	Max (V)	I_T (mA)				
P6KE6.8A	P6KE6.8CA	6.45	7.14	10	1000	5.8	57.1	10.5
P6KE7.5A	P6KE7.5CA	7.13	7.88	10	500	6.4	53.1	11.3
P6KE8.2A	P6KE8.2CA	7.79	8.61	10	200	7.02	49.6	12.1
P6KE9.1A	P6KE9.1CA	8.65	9.55	1	50	7.78	44.8	13.4
P6KE10A	P6KE10CA	9.5	10.5	1	10	8.55	41.4	14.5
P6KE11A	P6KE11CA	10.5	11.6	1	5	9.4	38.5	15.6
P6KE12A	P6KE12CA	11.4	12.6	1	5	10.2	35.9	16.7
P6KE13A	P6KE13CA	12.4	13.7	1	5	11.1	33	18.2
P6KE15A	P6KE15CA	14.3	15.8	1	1	12.8	28.3	21.2
P6KE16A	P6KE16CA	15.2	16.8	1	1	13.6	26.7	22.5
P6KE18A	P6KE18CA	17.1	18.9	1	1	15.3	23.8	25.2
P6KE20A	P6KE20CA	19	21	1	1	17.1	21.7	27.7
P6KE22A	P6KE22CA	20.9	23.1	1	1	18.8	19.6	30.6
P6KE24A	P6KE24CA	22.8	25.2	1	1	20.5	18.1	33.2
P6KE27A	P6KE27CA	25.7	28.4	1	1	23.1	16	37.5
P6KE30A	P6KE30CA	28.5	31.5	1	1	25.6	14.5	41.4
P6KE33A	P6KE33CA	31.4	34.7	1	1	28.2	13.1	45.7
P6KE36A	P6KE36CA	34.2	37.8	1	1	30.8	12	49.9
P6KE39A	P6KE39CA	37.1	41	1	1	33.3	11.1	53.9
P6KE43A	P6KE43CA	40.9	45.2	1	1	36.8	10.1	59.3
P6KE47A	P6KE47CA	44.7	49.4	1	1	40.2	9.3	64.8
P6KE51A	P6KE51CA	48.5	53.6	1	1	43.6	8.6	70.1
P6KE56A	P6KE56CA	53.2	58.8	1	1	47.8	7.8	77
P6KE62A	P6KE62CA	58.9	65.1	1	1	53	7.1	85
P6KE68A	P6KE68CA	64.6	71.4	1	1	58.1	6.5	92
P6KE75A	P6KE75CA	71.3	78.8	1	1	64.1	5.8	103
P6KE82A	P6KE82CA	77.9	86.1	1	1	70.1	5.3	113
P6KE91A	P6KE91CA	86.5	95.5	1	1	77.8	4.8	125
P6KE100A	P6KE100CA	95	105	1	1	85.5	4.4	137
P6KE110A	P6KE110CA	105	116	1	1	94	3.9	152
P6KE120A	P6KE120CA	114	126	1	1	102	3.6	165
P6KE130A	P6KE130CA	124	137	1	1	111	3.4	179

P6KE Series 600W Transient Voltage Suppressor
ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$)

Part Number (Uni)	Part Number (Bi)	Breakdown Voltage $V_{BR}@I_T$			Maximum Reverse Leakage $I_R@$ V_{RWM} (μA)	Working Peak Reverse Voltage V_{RWM} (V)	Maximum Reverse Surge Current I_{PP} (A) ①	Maximum Clamping Voltage V_C @ I_{PP} (V)
		Min (V)	Max (V)	I_T (mA)				
P6KE150A	P6KE150CA	143	158	1	1	128	2.9	207
P6KE160A	P6KE160CA	152	168	1	1	136	2.7	219
P6KE170A	P6KE170CA	162	179	1	1	145	2.6	234
P6KE180A	P6KE180CA	171	189	1	1	154	2.4	246
P6KE200A	P6KE200CA	190	210	1	1	171	2.2	274
P6KE220A	P6KE220CA	209	231	1	1	185	1.8	328
P6KE250A	P6KE250CA	237	263	1	1	214	1.7	344
P6KE300A	P6KE300CA	285	315	1	1	256	1.4	414
P6KE350A	P6KE350CA	333	368	1	1	300	1.2	482
P6KE400A	P6KE400CA	380	420	1	1	342	1.1	548
P6KE440A	P6KE440CA	418	462	1	1	376	1	602
P6KE500A	P6KE500CA	475	525	1	1	427.5	0.87	690
P6KE520A	P6KE520CA	494	546	1	1	444.6	0.84	714
P6KE540A	P6KE540CA	513	567	1	1	459	0.81	741
P6KE550A	P6KE550CA	522.5	577	1	1	470	0.79	759
P6KE600A	P6KE600CA	570	630	1	1	513	0.72	833

① Surge waveform: 10/1000 μs

V_{RWM} : Stand-off voltage -- maximum voltage that can be applied

V_{BR} : Breakdown voltage

V_C : Clamping voltage -- peak voltage measured across the suppressor at a specified I_{PP}

I_R : Reverse leakage current

■ Characteristics(Typical)

FIG1: Peak Pulse Power Rating Curve

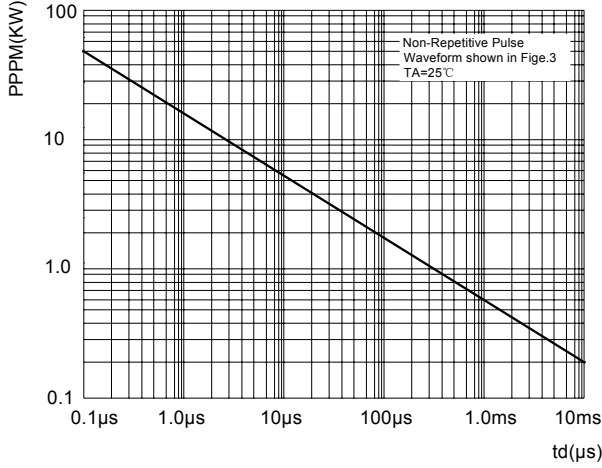


FIG2: Pulse Power or Current vs. Initial Junction Temperature

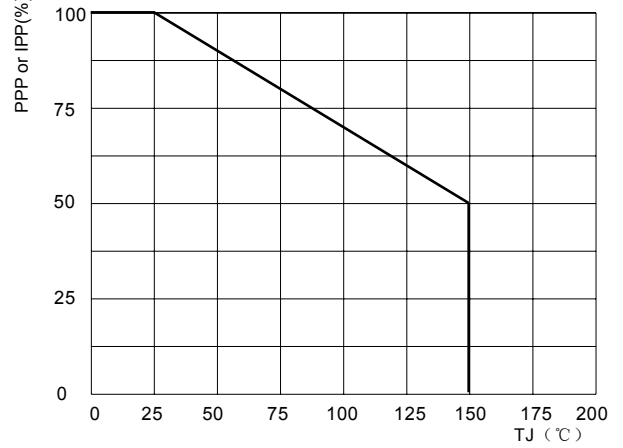


FIG3: Pulse Waveform

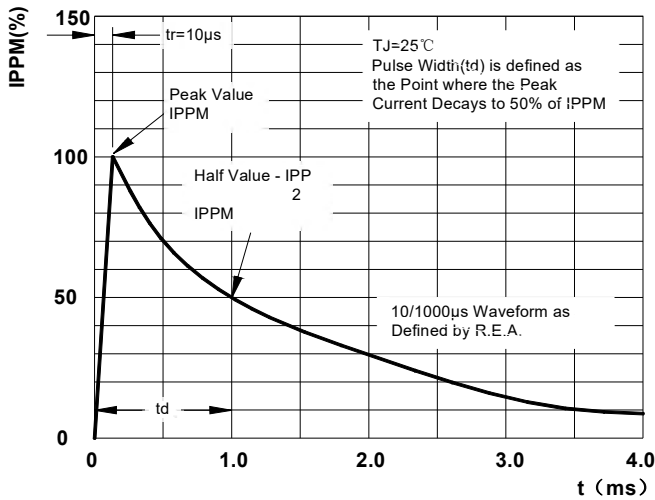


FIG4: Power Derating Curve


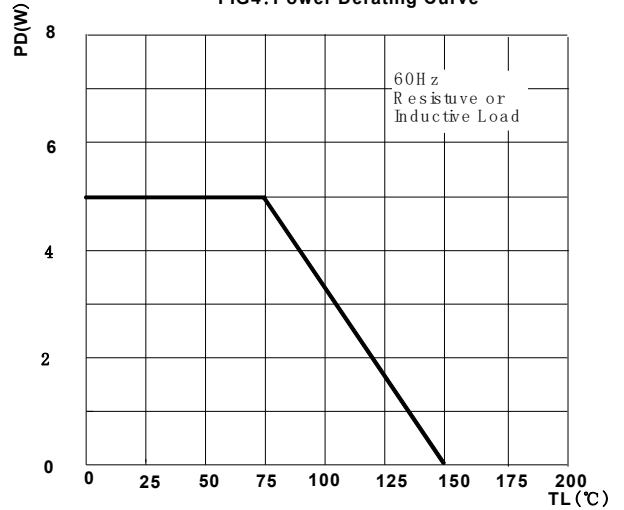


FIG5: Maximum Non-Repetitive Surge Current

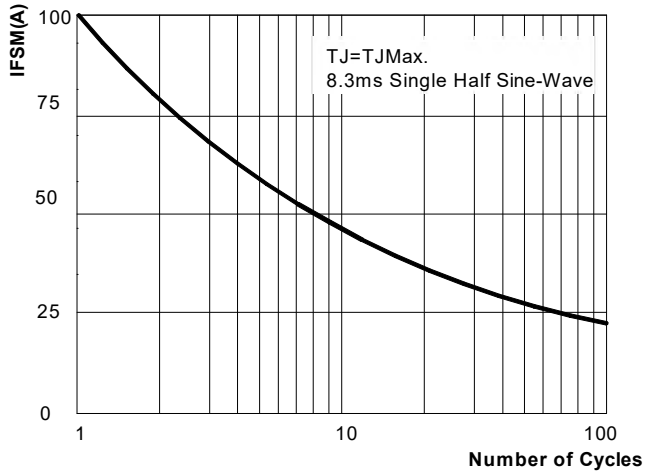

The curve above is for reference only.

Disclaimer

Our company makes no warranties, representations, or guarantees regarding the suitability of products for any specific purpose or the continuous production of any product. To the maximum extent permitted by applicable law, our company shall not be liable for:

- (i) any and all liabilities arising from the application or use of the products;
- (ii) any and all liabilities, including but not limited to special, indirect, or incidental damages;
- (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement, and merchantability.

Statements regarding the suitability of products for certain types of applications are based on our company's understanding of common requirements in general applications. Such statements are not binding representations of the products' fitness for specific applications. Customers are responsible for verifying whether the features described in the product specifications are suitable for their specific applications. Parameters provided in data sheets and specifications may vary across different applications, and performance may change over time. All operational parameters (including typical parameters) must be validated by the customer's technical experts for each specific application. Product specifications do not extend or modify our company's terms and conditions of purchase, including but not limited to the explicit warranty clauses therein.

Unless explicitly stated in writing and agreed upon in a signed agreement, our company's products are generally intended for traditional civil consumer electronics and are not designed for special applications such as medical, life-saving, life-sustaining, automotive, aerospace, military, or any other applications where product failure may cause personal injury or death. Customers assume all risks for unauthorized use or sale of our company's products in such applications without explicit written confirmation of suitability. Please contact our company's authorized personnel to obtain written terms and conditions for products designed for such applications and sign an agreement.

Nothing in this document or any action by our company shall constitute an express, implied, estoppel, or other grant of any intellectual property license. Product names and logos mentioned herein may be trademarks of their respective owners.