


OA125EC Series



EC Fan - Universal Voltage
120mm x 25mm (4.72" x 0.98")

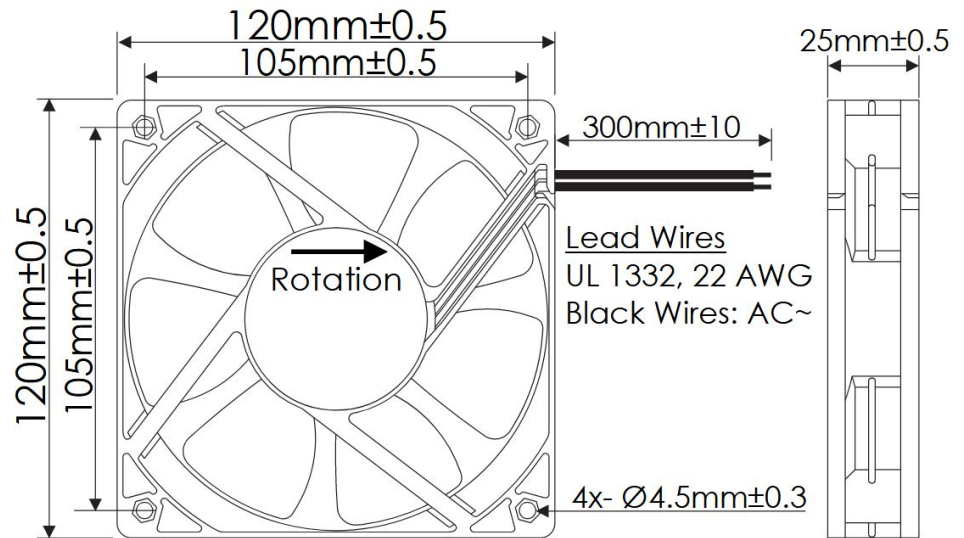

Frame	PBT, UL 94 V-0 Plastic	<u>Operating Temperature</u> -20°C ~ +65°C	Static Pressure ("H₂O) Airflow (CFM)
Impeller	PBT, UL 94 V-0 Plastic	<u>Storage Temperature</u> -20°C ~ +75°C	
Connection	2x Black Wire Leads, UL 1332 22 AWG	<u>Life Expectancy</u> 70,000 Hours (L10 at 40°C)	
Motor	Electronically Commutated, Electronically Protected	<u>Available Options</u> IP Ratings Speed Control Inputs Alarm and Tach Outputs	
Bearing System	Ball Bearings	Weight: 0.39 lbs.	
Dielectric Strength	1500VAC/min, <1mA		
Insulation Resistance	≥10MΩ @ 500 VDC		

Part Number	OA125EC-UR-1WB
Rated Voltage (Volts AC)	115 / 230, 50 / 60 Hz
Voltage Range (Volts AC)	85 ~ 265
Input Power (Watts)	8 ~ 6 Max
Rated Speed (RPM)	3000
Max Airflow (CFM)	80
Noise Level (dBA)	49
Max Static Pressure (" H ₂ O)	0.21